

Hoshizaki America, Inc.

SafeTemp Series Refrigerated Kitchen Equipment

Models

RH1-AAC(-HD)

RH2-AAC(-HD)

RH3-AAC(-HD)



“A Superior Degree
of Reliability”

www.hoshizaki.com

PARTS LIST



Number: 71178
Issued: 8-30-2000
Revised: 9-9-2010

CONTENTS

Material Abbreviations	4
Auxiliary Codes	5
Note About Ordering Parts	5
A. Reach-In	6
RH1-AAC(-HD)	6
RH2-AAC(-HD)	8
RH3-AAC(-HD)	10
B. Refrigeration System	12
RH1-AAC(-HD)	12
RH2-AAC(-HD)	14
RH3-AAC(-HD)	16
C. Panel-Front Hinged Assembly	18
RH1-AAC(-HD), RH2-AAC(-HD), RH3-AAC(-HD)	18
D. Body-Final	20
RH1-AAC	20
RH1-AAC-HD	22
RH2-AAC	24
RH2-AAC-HD	26
RH3-AAC	28
RH3-AAC-HD	30
E. Control Box Assembly	32
RH1-AAC(-HD), RH2-AAC(-HD), RH3-AAC(-HD)	32
F. Fan-Evaporator Assembly	34
RH1-AAC(-HD)	34
F. Evaporator-Shroud Assembly	36
RH2-AAC(-HD)	36
RH3-AAC(-HD)	37
G. Evaporator Assembly	38
RH1-AAC(-HD)	38
RH2-AAC(-HD)	39
RH3-AAC(-HD)	40
H. Condenser Assembly	41
RH1-AAC(-HD)	41
RH2-AAC(-HD)	43
RH3-AAC(-HD)	45
J. Body-Prefinal	47
RH1-AAC(-HD)	47
RH2-AAC(-HD)	49
RH3-AAC(-HD)	51
K. Door-Right	53
RH1-AAC, RH2-AAC, RH3-AAC	53
L. Door-Left	55
RH2-AAC, RH3-AAC	55

M. Door-Half (UR).....	57
RH1-AAC-HD, RH2-AAC-HD, RH3-AAC-HD.....	57
N. Door-Half (LR).....	58
RH1-AAC-HD, RH2-AAC-HD, RH3-AAC-HD.....	58
P. Door-Half (UL).....	59
RH2-AAC-HD, RH3-AAC-HD	59
Q. Door-Half (LL)	60
RH2-AAC-HD, RH3-AAC-HD	60
R. Mullion-Horizontal	61
RH1-AAC-HD	61
S. Mullion-Vertical	62
RH2-AAC, RH3-AAC	62
T. Mullion-Cross	64
RH2-AAC-HD, RH3-AAC-HD	64
U. Mullion-Tee	66
RH3-AAC-HD	66
V. Label Location	68
RH1-AAC(-HD).....	68
RH2-AAC(-HD).....	69
RH3-AAC(-HD).....	70
W. Literature & Packaging.....	71
RH1-AAC(-HD), RH2-AAC(-HD), RH3-AAC(-HD).....	71

Material Abbreviations

ALUMINUM

AL = Aluminum

COPPER

CU = Copper

PLASTIC

ABS = Acrylonitrile -butadiene - styrene
AC = Polyacetal
EVA = Ethylene vinyl acetate
PA = Polyamide = Nylon
PC = Polycarbonate
PE = Polyethylene
PES = Polyester
PETP = Polyethylene terephthalate = Tetlon
PP = Polypropylene
PS = Polystyrene
PTFE = Polytetrafluoroethylene = Teflon
PUR = Polyurethane
PVC = Polyvinyl chloride

RUBBER

VN = Vinyl Nitrile
EPDM = EP rubber
NBR = Nitrile butadiene rubber
NR = Natural rubber
NP = Neoprene
SI.R = Silicone rubber
SY.R = Synthetic rubber
EPH = Epichlorohydrin

STEEL

GS = Galvanized steel
SS = Stainless steel
PS = Plated steel
PAS = Primed steel

AUXILIARY CODE

K-0

┌┐ Designates the year. "K" indicates the year 2000. Years progress or regress in alphabetical order.
└┐ "J" is 1999, "L" is 2001, "M" is 2002, and so on. The letters "I" and "O" were skipped.
└┐ Designates significant part changes within the same year for this model. Base is 5 (0 for codes L-0 and earlier) and this number advances for each change.

Example: P-6

┌┐ "P" indicates 2004.
└┐ "6" indicates the first significant part change for 2004.

Auxiliary Codes


RH1-AAC	K-0	June 2000	RH2-AAC-HD	K-0	May 2000
	K-1	October 2000		L-5	February 2001
	L-0	December 2000		N-5	December 2001
	L-5	February 2001		N-6	February 2003
	M-5	December 2001		P-5	December 2003
	M-6	July 2002		P-6	October 2004
	M-7	August 2002		Q-5	January 2005
	N-5	December 2002	RH3-AAC	K-0	November 2000
	N-6	January 2003		L-0	February 2001
	P-5	December 2003		L-5	March 2001
	P-6	October 2004		M-5	March 2002
	P-7	November 2004		M-6	July 2002
	Q-5	December 2004		M-7	August 2002
RH1-AAC-HD	K-0	May 2000		N-5	December 2002
	K-1	November 2000		N-6	March 2003
	L-0	December 2000		P-5	December 2003
	L-5	March 2001		Q-5	January 2005
	M-5	September 2002	RH3-AAC-HD	K-0	August 2000
	N-6	January 2003		N-6	July 2003
	P-5	January 2004		Q-5	February 2005
	P-6	October 2004			
	Q-5	January 2005			
RH2-AAC	K-0	June 2000			
	L-5	February 2001			
	M-5	December 2001			
	M-6	July 2002			
	M-7	August 2002			
	N-6	January 2003			
	P-5	December 2003			
	P-6	October 2004			
	P-7	November 2004			
	Q-5	December 2004			

Note About Ordering Parts

Most assemblies cannot be ordered as complete units; parts in the assemblies generally must be ordered separately.

RH1-AAC(-HD)

K-0, K-1, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

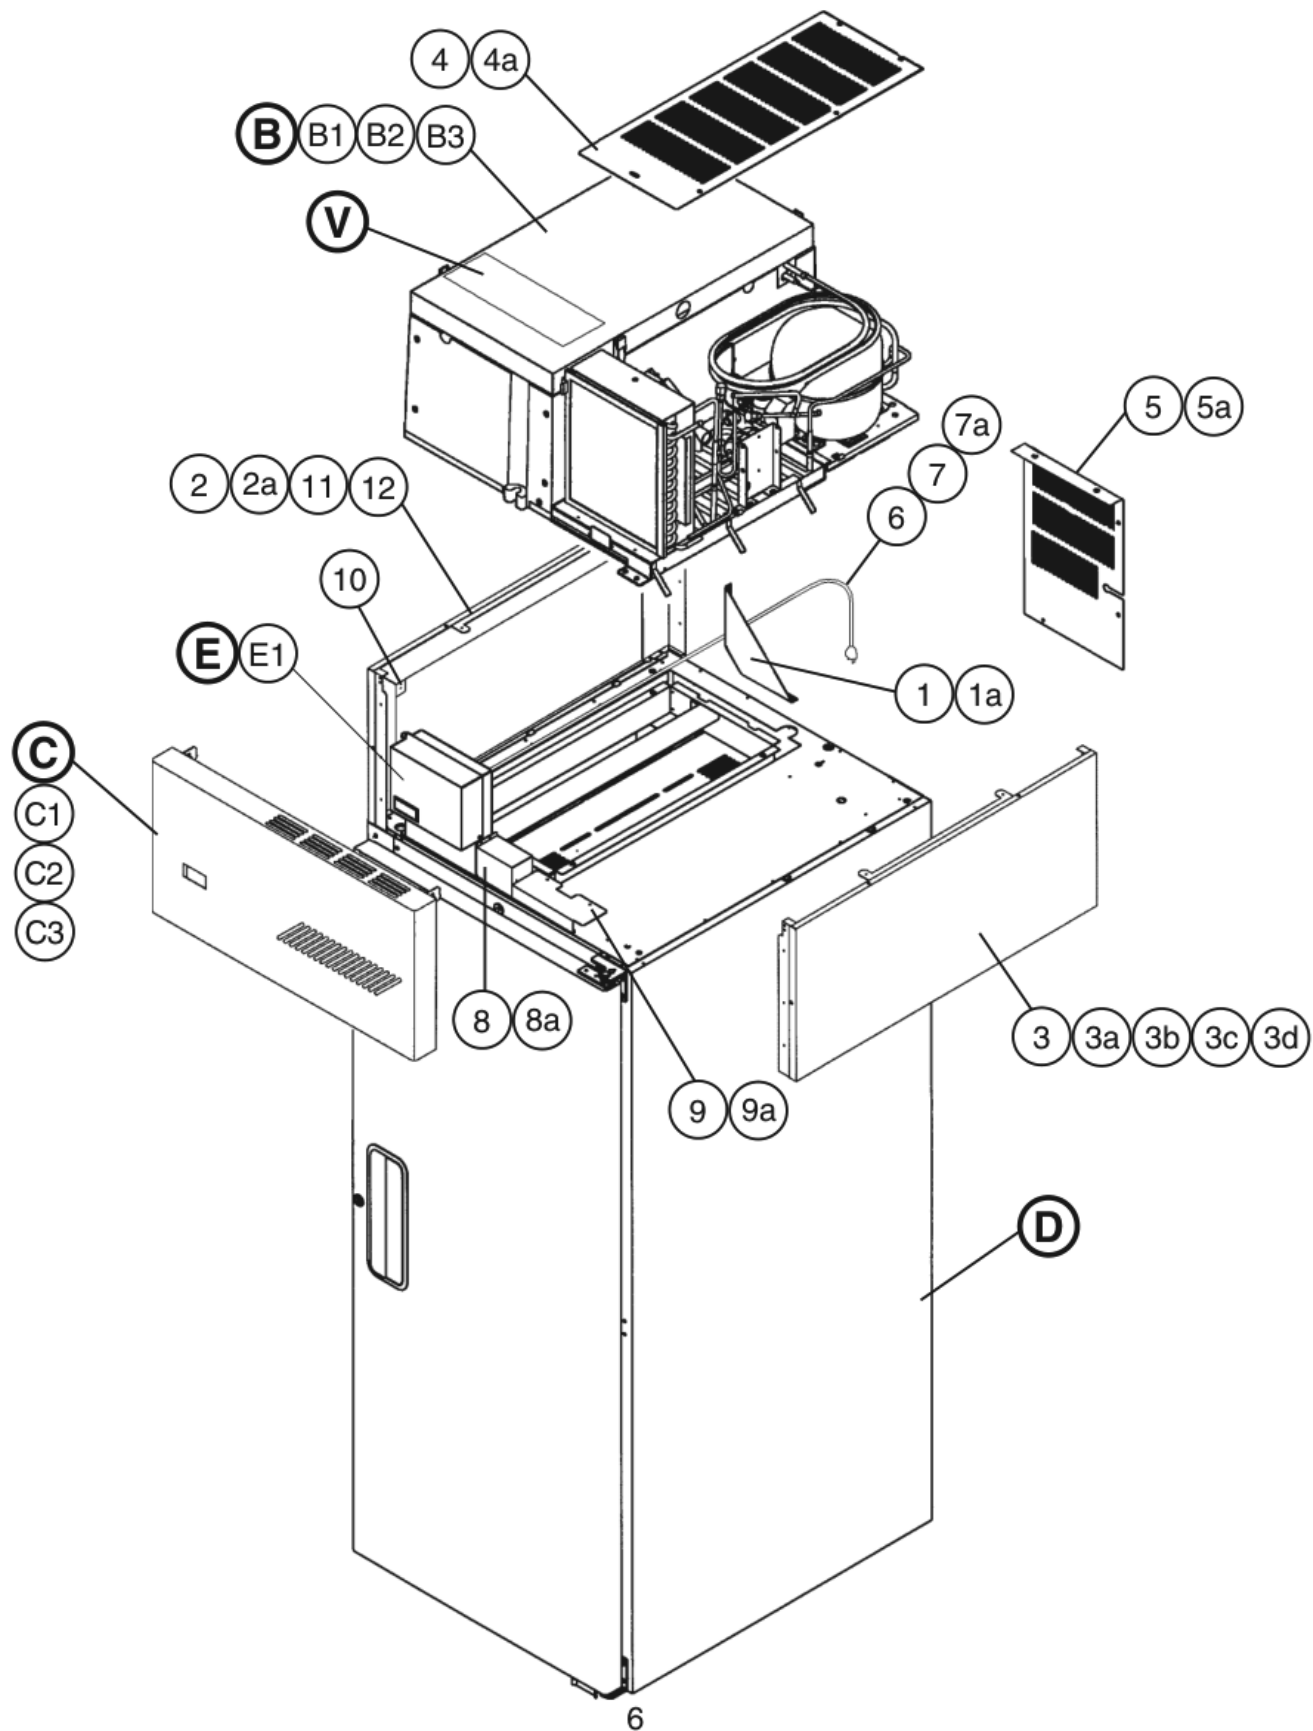


Title: **A. Reach-In** Model: **RH1-AAC(-HD)**

Index No.	Description	Material or Model Number	Part Number	Required Number							
				K-0 K-1	L-0	L-5 to N-5	N-6 to Q-5				
B	Refrigeration System	Refrigerator	1A0502A01	1	1	1	1				
B1	Bolt Assembly	8x45	437889-01	5	5	5	5				
B2	Truss Head Screw	5x25, SS	7C32-0525	2	2	2	2				
B3	Washer	5	7W22-0500	2	2	2	2				
C	Panel – Front Hinged Assembly	-	3A1670A01	1	1	1	1				
C1	Truss Head Screw	4x8, SS	7C32-0408	2	-						
	Clevis Pin	-	8907-0102		2	2	2				
C2	Cotter Pin	-	8907-0103		2	2	2				
C3	Flat Washer	-	4A0655-03		2	2	2				
D	Body – Final	RH1-AAC	1A0299A04	1	1	1	1				
		RH1-AAC-HD	1A0360A02	1	1	1	1				
E	Control Box Assembly	-	2A1842A01	1	1	1	1				
E1	T2 Screw	4x8, SS	7P32-0408	3	3	3	3				
V	Label Location	RH1-AAC	2A1042A07	1	1	1	1				
		RH1-AAC-HD	2A1042A06	1	1	1	1				
1	Gusset – Frame	GS	3A1520-01	1	1	1	-				
			4A2845-01				1				
1a	T2 Screw	4x8, SS	7P32-0408	4	4	4	4				
2	Frame-side Top	GS	2A1803-01	2	2	2	2				
2a	Truss Head Screw	5x10	7C32-0510	8	8	8	8				
3	Panel – Side, Top	AL	2A1800-21	2	2	2	2				
3a	Truss Head Screw	5x10	7C32-0510	6	2	2	2				
3b	Taper Collar	SS	4H0171-01	2	2	2	2				
3c	Countersunk Screw	5x20, SS	7C42-0520	2	2	2	2				
3d	T2 Screw	4x8, SS	7P32-0408		4	4	4				
4	UL – Cover Assy Top	-	2A1305G02	1	1	1	-				
		GS	2A2757G02				1				
4a	T2 Screw	4x8, SS	7P32-0408	5	5	5	5				
5	Cover – UL, Rear	GS	2A0956-01	1	1	1	-				
			2A2752-01				1				
5a	T2 Screw	4x8, SS	7P32-0408	4	4	4	4				
6	Power Cord	-	4A0520-01	1	1	1	1				
7	Wire Clamp	-	4A0809-02	1	1	1	1				
7a	T2 Screw	4x8, SS	7P32-0408	1	1	1	1				
8	Cover – Connector Wire	GS	3A1678-01	1	1	1	1				
8a	T2 Screw	4x8, SS	7P32-0408	2	2	2	2				
9	Cover – Wire	GS	3A1679-01	1	1	1	1				
9a	T2 Screw	4x8, SS	7P32-0408	3	3	3	3				
10	Bracket – Hinge	GS	4A2306-01	2	2	2	2				
11	Insert – Threaded	M5	4A0407-01		4	4	4				
12	Bracket – Control Box	GS	4A2467-01			1	1				

A. Reach-In **RH2-AAC(-HD)**


K-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

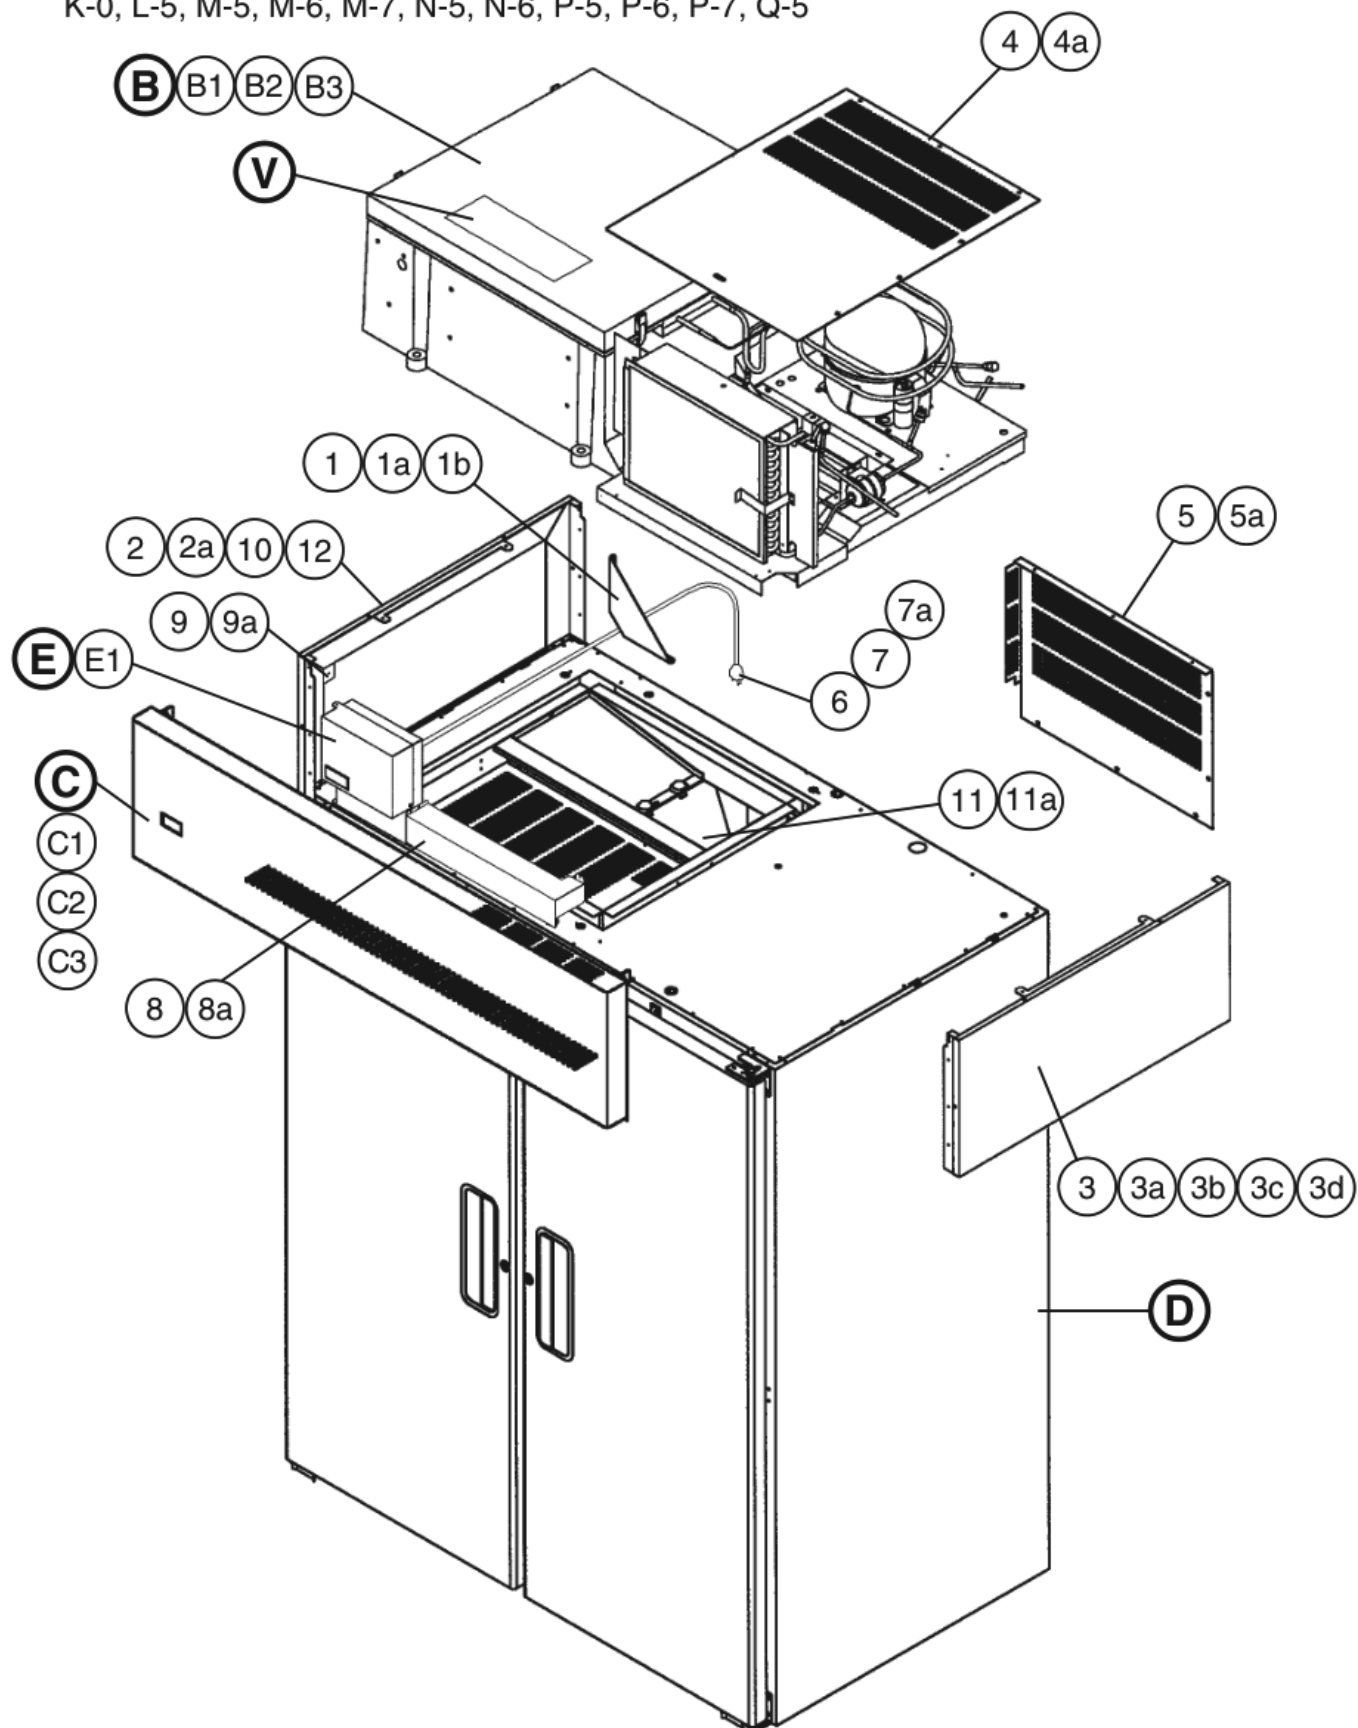

Title: A. Reach-In Model: RH2-AAC(-HD)											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				K-0	L-5 to N-5	N-6 to Q-5					
B	Refrigeration System	Refrigerator	1A0513A01	1	1	1					
B1	Bolt Assembly	8x45	437889-01	6	6	6					
B2	Hex Bolt	8x70	7B01-0870	2	2	2					
B3	Washer	8	7W22-0800	2	2	2					
C	Panel – Front Hinged Assembly	-	3A1670A02	1	1	1					
C1	Truss Head Screw	4x8, SS	7C32-0408	2	-						
	Clevis Pin	-	8907-0102		2	2					
C2	Cotter Pin	-	8907-0103		2	2					
C3	Flat Washer	-	4A0655-03		2	2					
D	Body – Final	RH2-AAC	2A1215A04	1	1	1					
		RH2-AAC-HD	1A0370A02	1	1	1					
E	Control Box Assembly	-	2A1842A02	1	1	1					
E1	T2 Screw	4x8, SS	7P32-0408	4	4	4					
V	Label Location	RH2-AAC	3A0603G07	1	1	1					
		RH2-AAC-HD	3A0603G06	1	1	1					
1	Gusset – Frame	GS	3A1520-01	1	1	-					
			4A2845-01			1					
1a	T2 Screw	4x8, SS	7P32-0408	2	2	4					
1b	Truss Head Screw	5x10	7C32-0510	2	2	-					
2	Frame – Side Top	GS	2A1803-01	2	2	2					
2a	Truss Head Screw	5x10	7C32-0510	8	8	8					
3	Panel – Side, Top	AL	2A1800-21	2	2	2					
3a	Truss Head Screw	5x10	7C32-0510	6	2	2					
3b	Taper Collar	SS	4H0171-01	2	2	2					
3c	Countersunk Screw	5x20, SS	7C42-0520	2	2	2					
3d	T2 Screw	4x8, SS	7P32-0408	4	4	4					
4	Top UL Cover	GS	2A1118-03	1	1	1					
4a	T2 Screw	4x8, SS	7P32-0408	5	5	5					
5	Rear UL Cover	GS	2A1117-01	1	1	1					
5a	T2 Screw	4x8, SS	7P32-0408	5	5	5					
6	Power Cord	-	4A0520-01	1	1	1					
7	Wire Clamp	-	4A0809-03	1	1	-					
			4A0809-02			1					
7a	Truss Head Screw	5x8	7C32-0508	1	1	-					
	T2 Screw	4x8, SS	7P32-0408			1					
8	Cover – Wire	GS	2A1861-01	1	1	1					
8a	T2 Screw	4x8, SS	7P32-0408	3	3	3					
9	Sleeve-hinge	-	4A2208-01	2	-						
	Bracket – Hinge	-	4A2306-01		2	2					
9a	Truss Head Screw	4x8, SS	7C32-0408	2	-						
10	Insert – Threaded	M5	4A0407-01	4	4	4					
11	Distributor – Air Top	-	1A0152-05	1	1	1					
11a	T2 Screw	4x8, SS	7P32-0408	7	7	7					
12	Bracket – Control Box	GS	4A2467-01		1	1					

A. Reach-In **RH3-AAC(-HD)**

K-0, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, Q-5

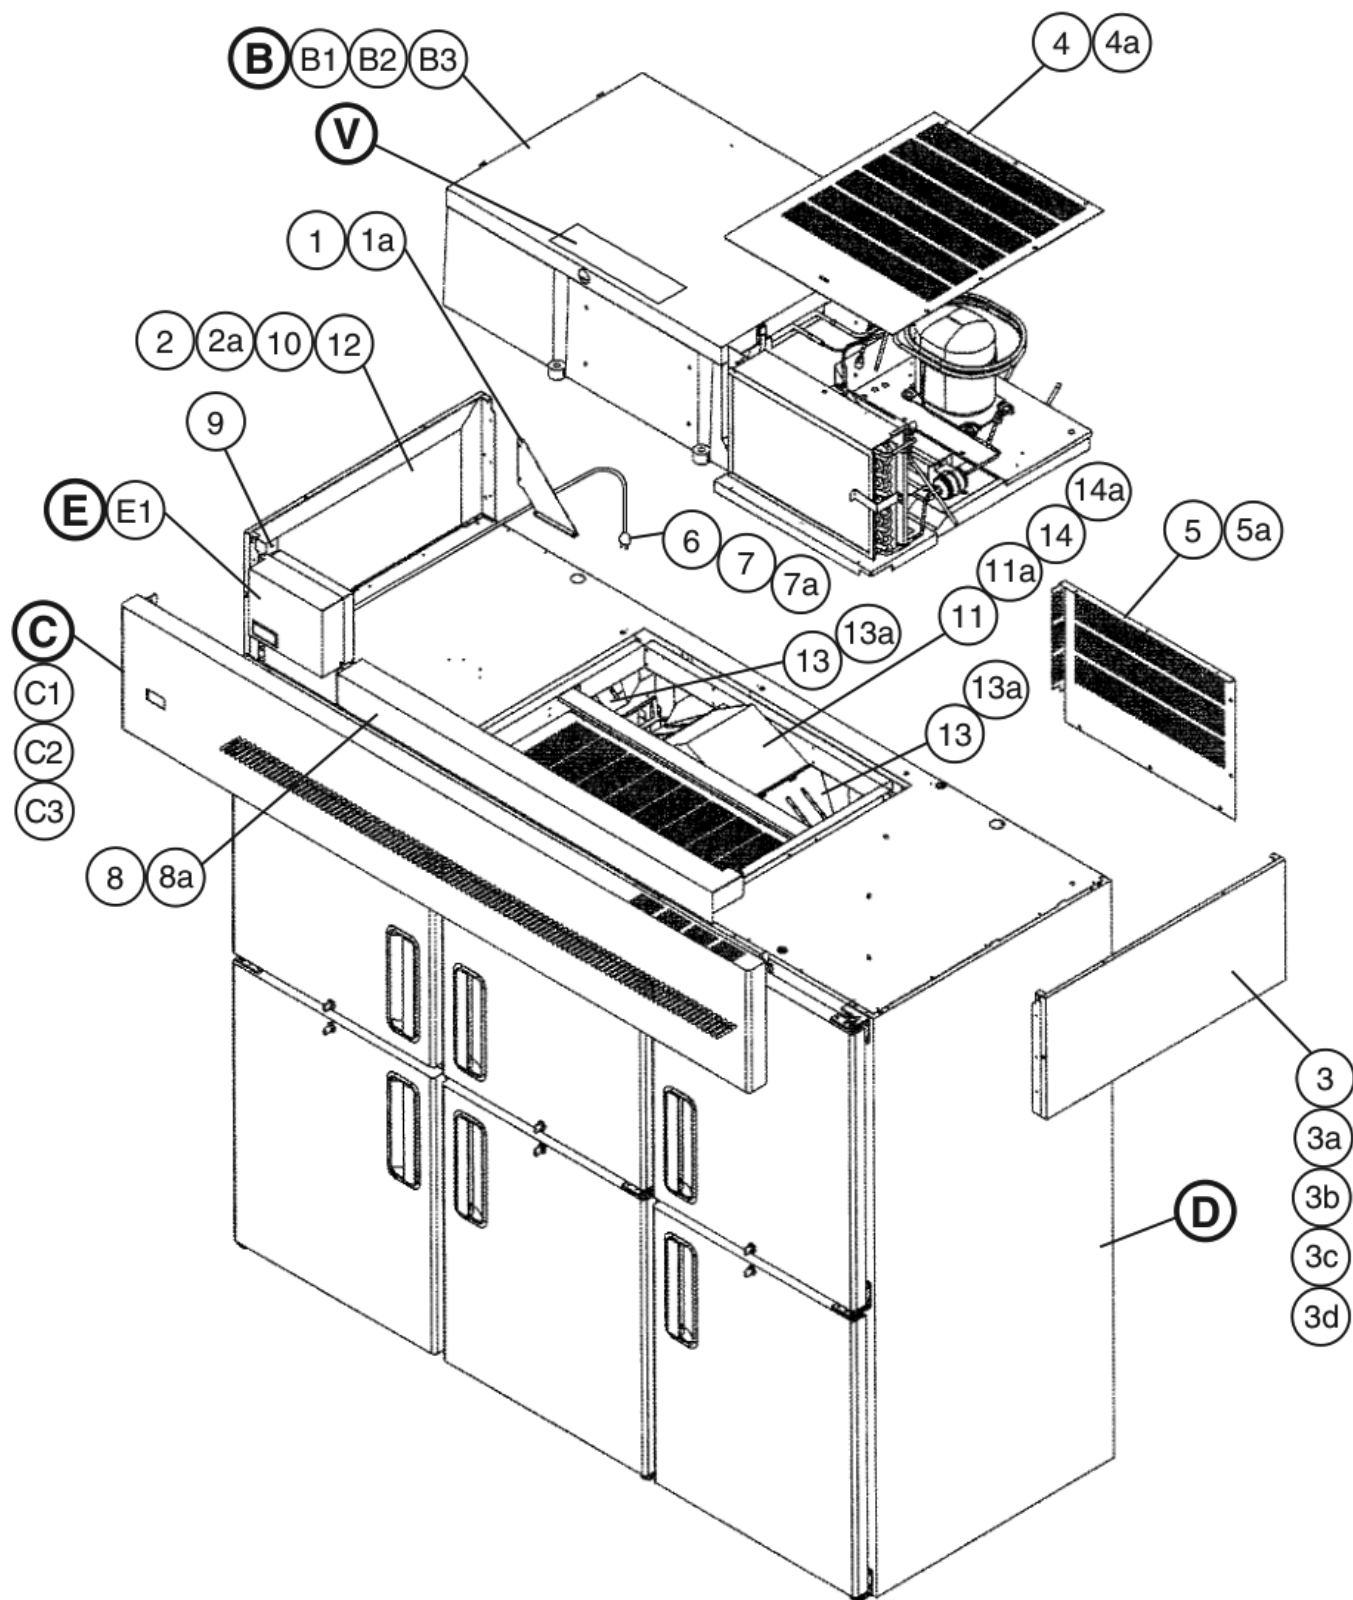

Title: **A. Reach-In** Model: **RH3-AAC(-HD)**

Index No.	Description	Material or Model Number	Part Number	Required Number							
				K-0 L-0	L-5 M-5	M-6 to N-5	N-6 to Q-5				
B	Refrigeration System	Refrigerator	1A0519A01	1	1	1	1				
B1	Bolt Assembly	8x45	437889-01	6	6	6	6				
B2	Hex Bolt	8x70	7B01-0870	2	2	2	2				
B3	Washer	8	7W21-0800	2	2	2	2				
C	Panel – Front Hinged Assembly	-	3A1670A03	1	1	1	1				
C1	Clevis Pin	-	8907-0102	2	2	2	2				
C2	Cotter Pin	-	8907-0103	2	2	2	2				
C3	Flat Washer	-	4A0655-03	2	2	2	2				
D	Body – Final	RH3-AAC	2A1133A04	1	1	1	1				
		RH3-AAC-HD	2A1400A02	1	1	1	1				
E	Control Box Assembly	-	2A1842A04	1	1	1	1				
E1	T2 Screw	4x8, SS	7P32-0408	4	4	4	4				
V	Label Location	RH3-AAC	3A1059G07	1	1	1	1				
		RH3-AAC-HD	3A1059G06	1	1	1	1				
1	Gusset – Frame	GS	3A1520-01	1	1	1	-				
			4A2845-01				1				
1a	T2 Screw	4x8, SS	7P32-0408	4	4	4	4				
2	Frame – Side Top	GS	2A1803-01	2	2	2	2				
2a	Truss Head Screw	5x10, SS	7C32-0510	8	8	8	8				
3	Panel – Side, Top	AL	2A1800-21	2	2	2	2				
3a	Truss Head Screw	5x10, SS	7C32-0510	2	2	2	2				
3b	Taper Collar	SS	4H0171-01	2	2	2	2				
3c	Countersunk Screw	5x20, SS	7C42-0520	2	2	2	2				
3d	T2 Screw	4x8, SS	7P32-0408	4	4	4	4				
4	Top UL Cover	GS	2A1118-03	1	1	-					
	UL Cover – Assembly Top	-	2A2376G01			1	1				
4a	T2 Screw	4x8, SS	7P32-0408	7	7	7	7				
5	Rear UL Cover	GS	2A1117-01	1	1	1	1				
5a	T2 Screw	4x8, SS	7P32-0408	7	7	7	7				
6	Power Cord	-	4A0520-01	1	1	1	1				
7	Wire Clamp	-	4A0809-02	1	1	1	1				
7a	T2 Screw	4x8, SS	7P32-0408	1	1	1	1				
8	Cover-wire	GS	2A1910-01	1	1	1	1				
8a	T2 Screw	4x8, SS	7P32-0408	3	3	3	3				
9	Bracket – Hinge	-	4A2306-01	2	2	2	2				
10	Insert – Threaded	M5	4A0407-01	4	4	4	4				
11	Diverter – Air	-	2A1855-01	1	1	1	1				
11a	T2 Screw	4x8, SS	7P32-0408	2	2	2	2				
12	Bracket – Control Box	GS	4A2467-01		1	1	1				
13	Distributor – Air Top	-	1A0152-05	2	2	2	2				
13a	T2 Screw	4x8, SS	7P32-0408	14	14	14	14				
14	Taper Collar		4H0171-01	2	2	2	2				
14a	Countersunk Screw	5x20, SS	7C42-0520	2	2	2	2				

RH1-AAC(-HD)


This exploded view diagram illustrates the assembly of a microwave oven. The main components are labeled with numbers and letters:

- 1, 1a, 1b, 1c**: Top outer casing.
- 2, 3, 4, 5, 6, 6a, 19, 20, 21, 22**: Turntable assembly components.
- 7**: Turntable support structure.
- 8**: Door panel.
- 9**: Door hinge/locking mechanism.
- 10, 11, 11a**: Door latch components (shown in an inset).
- 12**: Latch pin.
- 13**: Control panel bracket.
- 14, 17, 17a**: Control panel components.
- 15**: Control panel mounting screw.
- 16**: Control panel base.
- 18, 18a**: Magnetron assembly components.
- 23**: Magnetron shield.
- F, F1**: Front panel components.
- G**: Magnetron assembly.
- H, H1**: Door hinge/locking mechanism.

Title: B. Refrigeration System Model: RH1-AAC(-HD)												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0 K-1	L-0	L-5 to N-5	N-6 P-5	P-6 to Q-5				
F	Fan – Evap Assembly	-	2A0980A01	1	1	1	1	1				
F1	Truss Head Screw	4x12, SS	7C32-0412	4	4	4	4	4				
G	Evaporator Assembly	-	2A1808A01	1	1	1	1	1				
H	Condenser Assembly		3A1087A02	1	1	1	-					
			3A2609A02				1	1				
H1	T2 Screw	4x8, SS	7P32-0408	2	2	2	2	2				
1	Cover – Evap Case (1 Sec)		2A0428G01	1	1	1	-					
			2A2726G01				1	1				
1a	Draw Latch	97-50-224-11	4A1710-01	4	4	4	4	4				
1b	Truss Head Screw	4x16, SS	7C32-0416	4	4	4	4	4				
1c	T2 Screw	4x8, SS	7P32-0408	8	8	8	8	8				
2	Compressor	105G5724 NF7FX	4A2133-01	1	1	1	1	1				
3	Rubber Grommet		4A1452-01	4	-							
	Grommet		434403-01		4	4	4	4				
4	Sleeve		4A1451-01	4	-							
	Spacer		434404-01		4	4	4	4				
5	Washer		4A1450-01	4	-							
	Flat Washer		7W21-0800		4	4	4	4				
6	Bolt		4A1459-01	4	-							
			7B01-0845		4	4	4	4				
6a	Split Lock Washer	-	7L21-0800		4	4	-					
7	Pipe – Evap Drain	PVC	4A0831-01	1	1	1	1	1				
8	Filter – Cond	-	3A0277-01	1	1	1	1	1				
9	Drier	SPORLAN CW-052-S	4A0924-01	1	1	1	1	1				
10	Thermistor – Cabinet	Thermistor is included w/ controller. (Assembly E) Thermistor is not replaceable as a standalone part.		-	-	-	-	-				
11	Thermistor Bracket (A)	ABS	433964-01	1	1	1	1	1				
11a	Truss Head Screw	4x16, SS	7C32-0416	2	2	2	2	2				
12	Thermistor Bracket (B)	ABS	433920-01	1	1	1	1	1				
13	Fitting – Drain Overflow	-	4A2182-01	1	1	1	1	1				
14	Gasket – Cond. Coil		4A0455-03	1	1	1	1	1				
15	Rubber Gasket		413854-03	1	1	1	1	1				
16	Pan – Evap. Drain		2A0616-02	1	1	1	-					
			2A2760-01				1	1				
17	Strap – Condensate Coil	(3A0381A03)	3A0232-03	1	1	1	1	1				
17a	Truss Head Screw	5x12, SS	7C32-0512	2	2	2	1	1				
18	Drier Bracket	-	4A0806-01	1	1	1	1	1				
18a	T2 Screw	4x8, SS	7P32-0408	2	2	2	2	2				
19	Start Capacitor		4A2134-01	1	1	1	1	1				
20	Start Relay		4A2135-01	1	1	1	1	1				
21	Cover – Compressor		4A2141-01	1	1	1	1	1				
22	Cord Relief		4A2152-01	1	1	1	1	1				
23	Pressure Switch		4A2516-01	1	1	1	1	1				

B. Refrigeration System RH2-AAC(-HD)


K-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

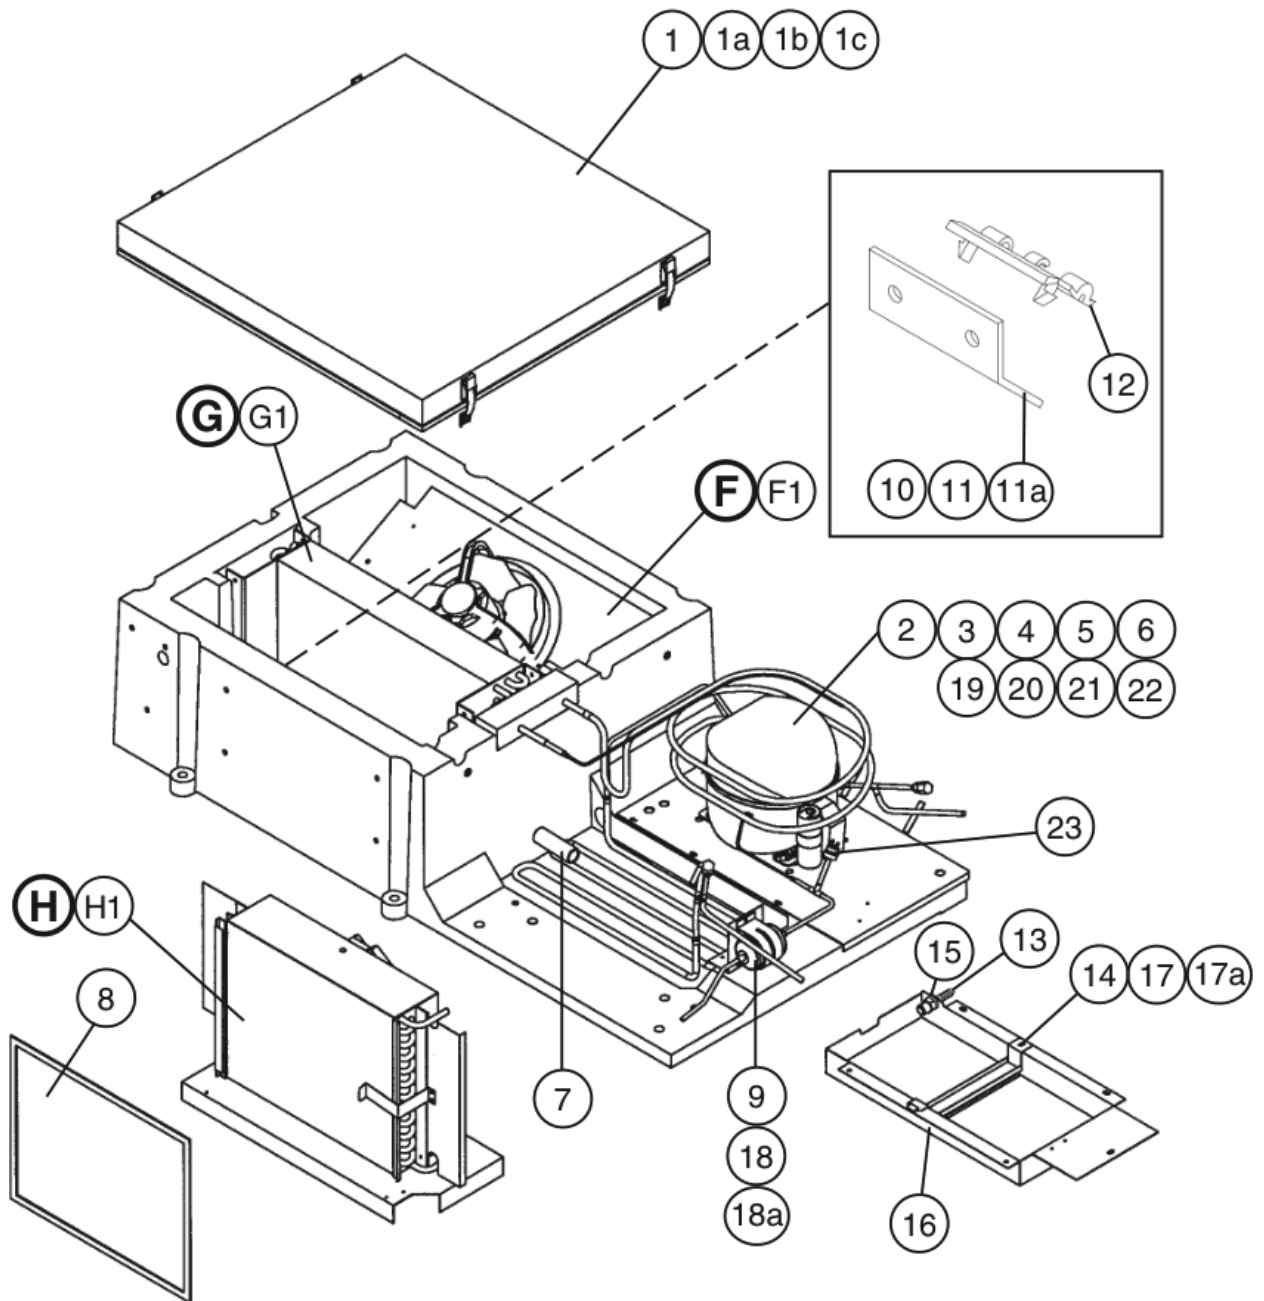

Title: B. Refrigeration System Model: RH2-AAC(-HD)											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				K-0	L-5 to P-5	P-6 to Q-5					
F	Evaporator Shroud Assembly	-	3A0263G01	1	1	1					
F1	Truss Head Screw	4x16	7C32-0416	2	2	2					
G	Evaporator Assembly	-	2A1297A03	1	1	1					
G1	T2 Screw	4x8, SS	7P32-0408	2	2	2					
H	Condenser Assembly	-	3A1138A01	1	1	1					
H1	T2 Screw	4x8, SS	7P32-0408	4	4	4					
1	Cover – Evap Case	-	2A0245G01	1	1	1					
1a	Draw Latch	97-50-224-11	4A1710-01	4	4	4					
1b	Truss Head Screw	4x16, SS	7C32-0416	4	4	4					
1c	T2 Screw	4x8, SS	7P32-0408	8	8	8					
2	Compressor	105G5945 NF11FX	4A2131-01	1	1	1					
3	Rubber Grommet	-	4A1452-01	4	-						
			434403-01		4	4					
4	Sleeve	-	4A1451-01	4	-						
			434404-01		4	4					
5	Washer	-	4A1450-01	4	-						
			7W21-0800		4	4					
6	Bolt	-	4A1459-01	4	-						
			7B01-0845		4	4					
7	Pipe – Evap Drain	PVC	3A0143-01	1	1	1					
8	Filter – Condenser	-	3A0277-02	1	1	1					
9	Drier	SPORLAN CW-052-S	4A0924-01	1	1	1					
10	Thermistor – Cabinet	Thermistor is included w/ controller. (Assembly E) Thermistor is not replaceable as a standalone part.		-	-	-					
11	Thermistor Bracket (A)	ABS	433964-01	1	1	1					
11a	Truss Head Screw	4x16, SS	7C32-0416	2	2	2					
12	Thermistor Bracket (B)	ABS	433920-01	1	1	1					
13	Fitting – Drain Overflow		4A2182-01	1	1	1					
14	Gasket – Cond. Coil		4A0455-01	1	1	1					
15	Rubber Gasket		413854-03	1	1	1					
16	Pan – Evaporator Drain		2A0200-02	1	1	1					
17	Strap – Condensate Coil		3A0413-03	1	1	1					
17a	Truss Head Screw	5x10, SS	7C32-0510	1	1	1					
18	Drier Bracket	-	4A0806-01	1	1	1					
18a	T2 Screw	-	7P32-0408	2	2	2					
19	Start Capacitor		4A2134-02	1	1	1					
20	Start Relay		4A2135-02	1	1	1					
21	Cover – Compressor		4A2141-01	1	1	1					
22	Cord Relief		4A2152-01	1	1	1					
23	Pressure Switch		4A2516-01	1	1	1					

B. Refrigeration System RH3-AAC(-HD)

K-0, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, Q-5


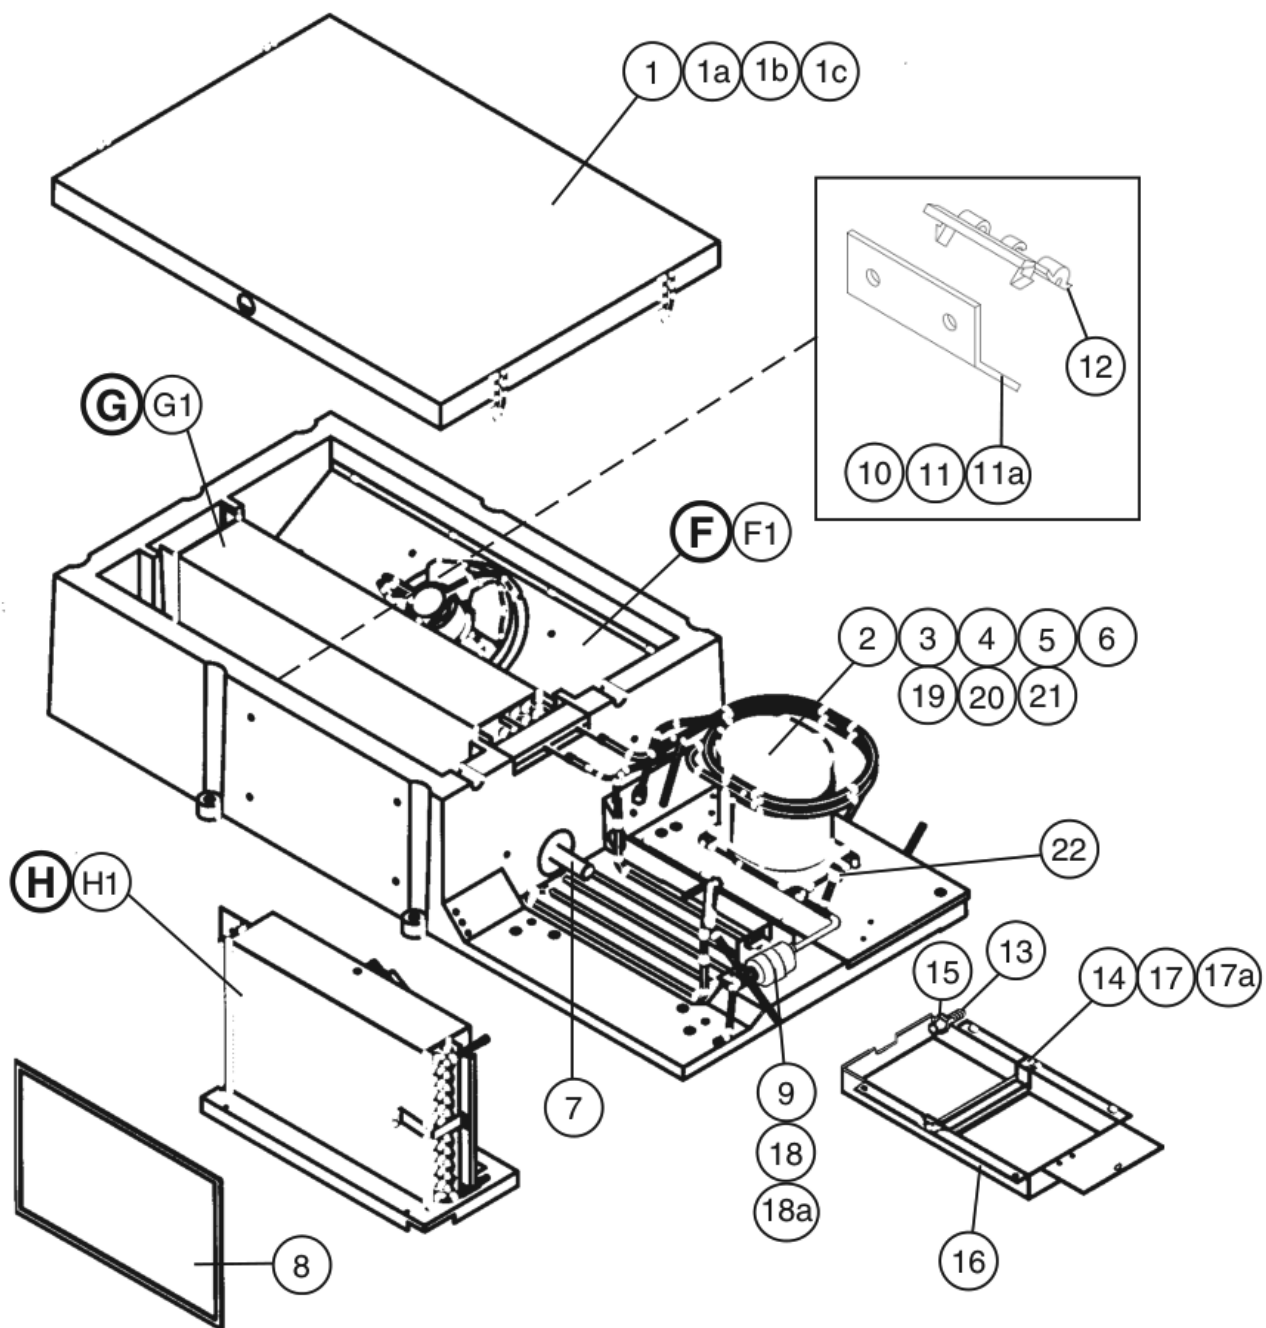


Title: B. Refrigeration System Model: RH3-AAC(-HD)												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0 to P-5	Q-5							
F	Evap Shroud Assm	-	3A1009G01	1	1							
F1	Truss Head Screw	4x16, SS	7C32-0416	2	2							
G	Evaporator Assembly	-	2A1160A02	1	1							
G1	T2 Screw	4x8, SS	7P32-0408	2	2							
H	Condenser Assembly	-	3A1010A02	1	1							
H1	T2 Screw	4x8, SS	7P32-0408	4	4							
1	Cover – Evap Case	-	2A1086G01	1	1							
1a	Draw Latch	97-50-224-11	4A1710-01	4	4							
1b	Truss Head Screw	4x16, SS	7C32-0416	4	4							
1c	T2 Screw	4x8, SS	7P32-0408	8	8							
2	Compressor	-	3A1730-01	1	1							
3	Grommet	-	434403-01	4	4							
4	Spacer	-	434404-01	4	4							
5	Flat Washer	-	7W21-0800	4	4							
6	Hex Bolt	-	7B01-0845	4	4							
7	Pipe – Evap Drain	PVC	3A0143-01	1	1							
8	Filter – Condenser	-	3A0277-03	1	1							
9	Drier	SPORLAN CW-052-S	4A0924-01	1	1							
10	Thermistor – Cabinet	Thermistor is included w/ controller. (Assembly E) Thermistor is not replaceable as a standalone part.		-	-							
11	Thermistor Bracket (A)	ABS	433964-01	1	1							
11a	Truss Head Screw	4x16, SS	7C32-0416	2	2							
12	Thermistor Bracket (B)	ABS	433920-01	1	1							
13	Fitting – Drain Overflow		4A2182-01	1	1							
14	Gasket – Cond. Coil		4A0455-01	1	1							
15	Rubber Gasket		413854-03	1	1							
16	Pan – Evaporator Drain		2A0200-02	1	1							
17	Strap – Condensate Coil		3A0413-03	1	1							
17a	Truss Head Screw	5x10, SS	7C32-0510	1	1							
18	Drier Bracket	-	4A0806-01	1	1							
18a	T2 Screw	4x8, SS	7P32-0408	2	2							
19	Protector	Supplied w/ compressor	4A1875-01	1	1							
20	Protector Holder	26126	Supplied w/ compressor	1	1							
21	Protector Cover Group	AKP1000		1	1							
22	Pressure Switch		4A2516-01	1	1							

C. Panel-Front Hinged Assembly

RH1-AAC(-HD), RH2-AAC(-HD), RH3-AAC(-HD)

K-0, K-1, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

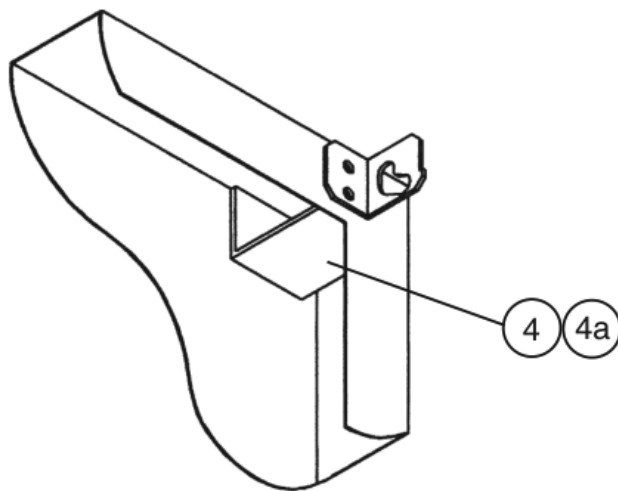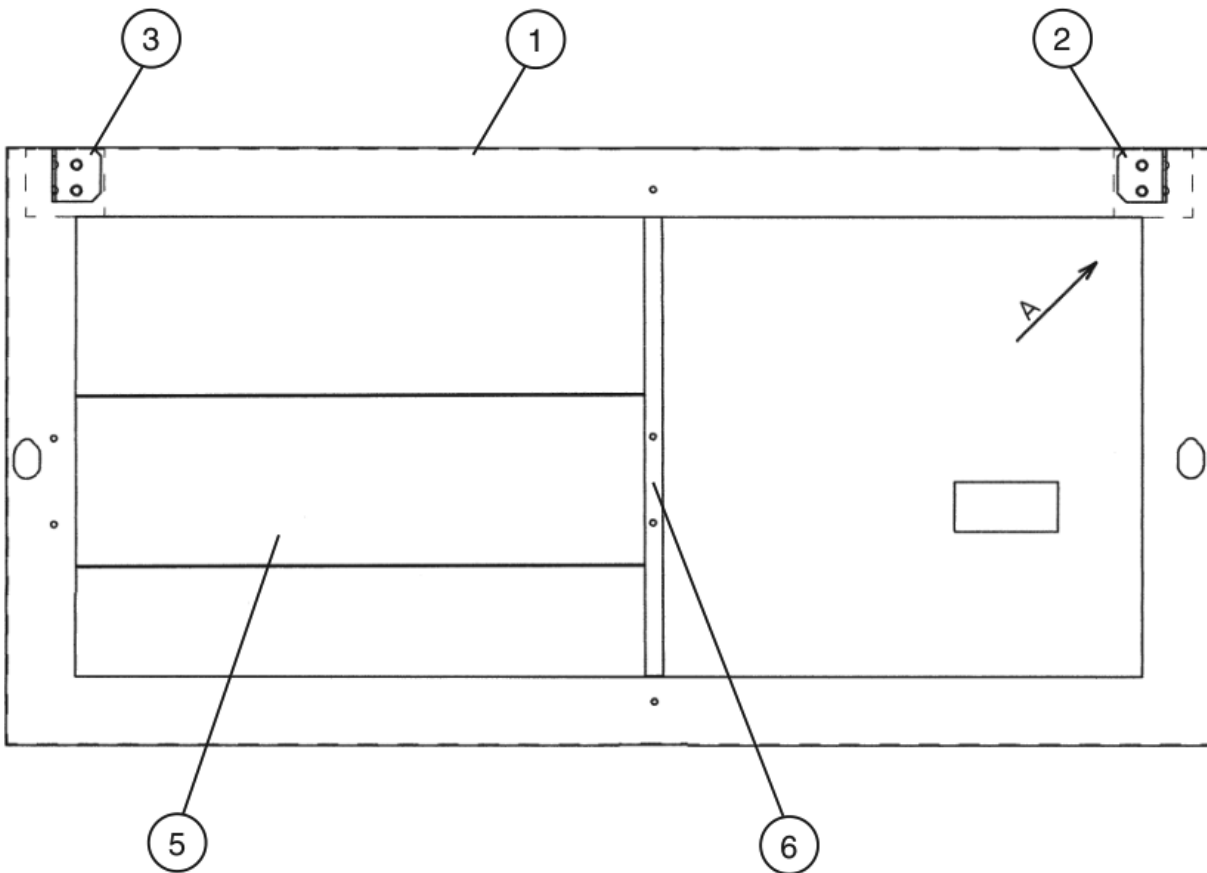


VIEW "A"

Title: C. Panel-Front Hinged Assembly Model: RH1-AAC(-HD), RH2-AAC(-HD), RH3-AAC(-HD)												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0 K-1	L-0 to Q-5							
1	Panel – Front Hinged	RH1-AAC(-HD) SS	2A1799-01	1	1							
		RH2-AAC(-HD) SS	2A1799-02	1	1							
		RH3-AAC(-HD) SS	2A1799-03	1	1							
2	Hinge – Front Panel(L)	GS	4A2153-01	1	1							
3	Hinge – Front Panel(R)	GS	4A2154-01	1	1							
4	Channel – Hinge	GS	4A2170-01	2	2							
4a	Truss Head Screw	5x8, SS	7C32-0508	4	4							
5	Blind	RH1-AAC(-HD)	3A1763-01		1							
		RH2-AAC(-HD)	3A1763-02		1							
		RH3-AAC(-HD)	3A1763-03	1	1							
6	Support – Blind	RH1-AAC(-HD) RH2-AAC(-HD)	4A2267-01		1							
		RH3-AAC(-HD)		1	1							

RH1-AAC


K-0, K-1, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

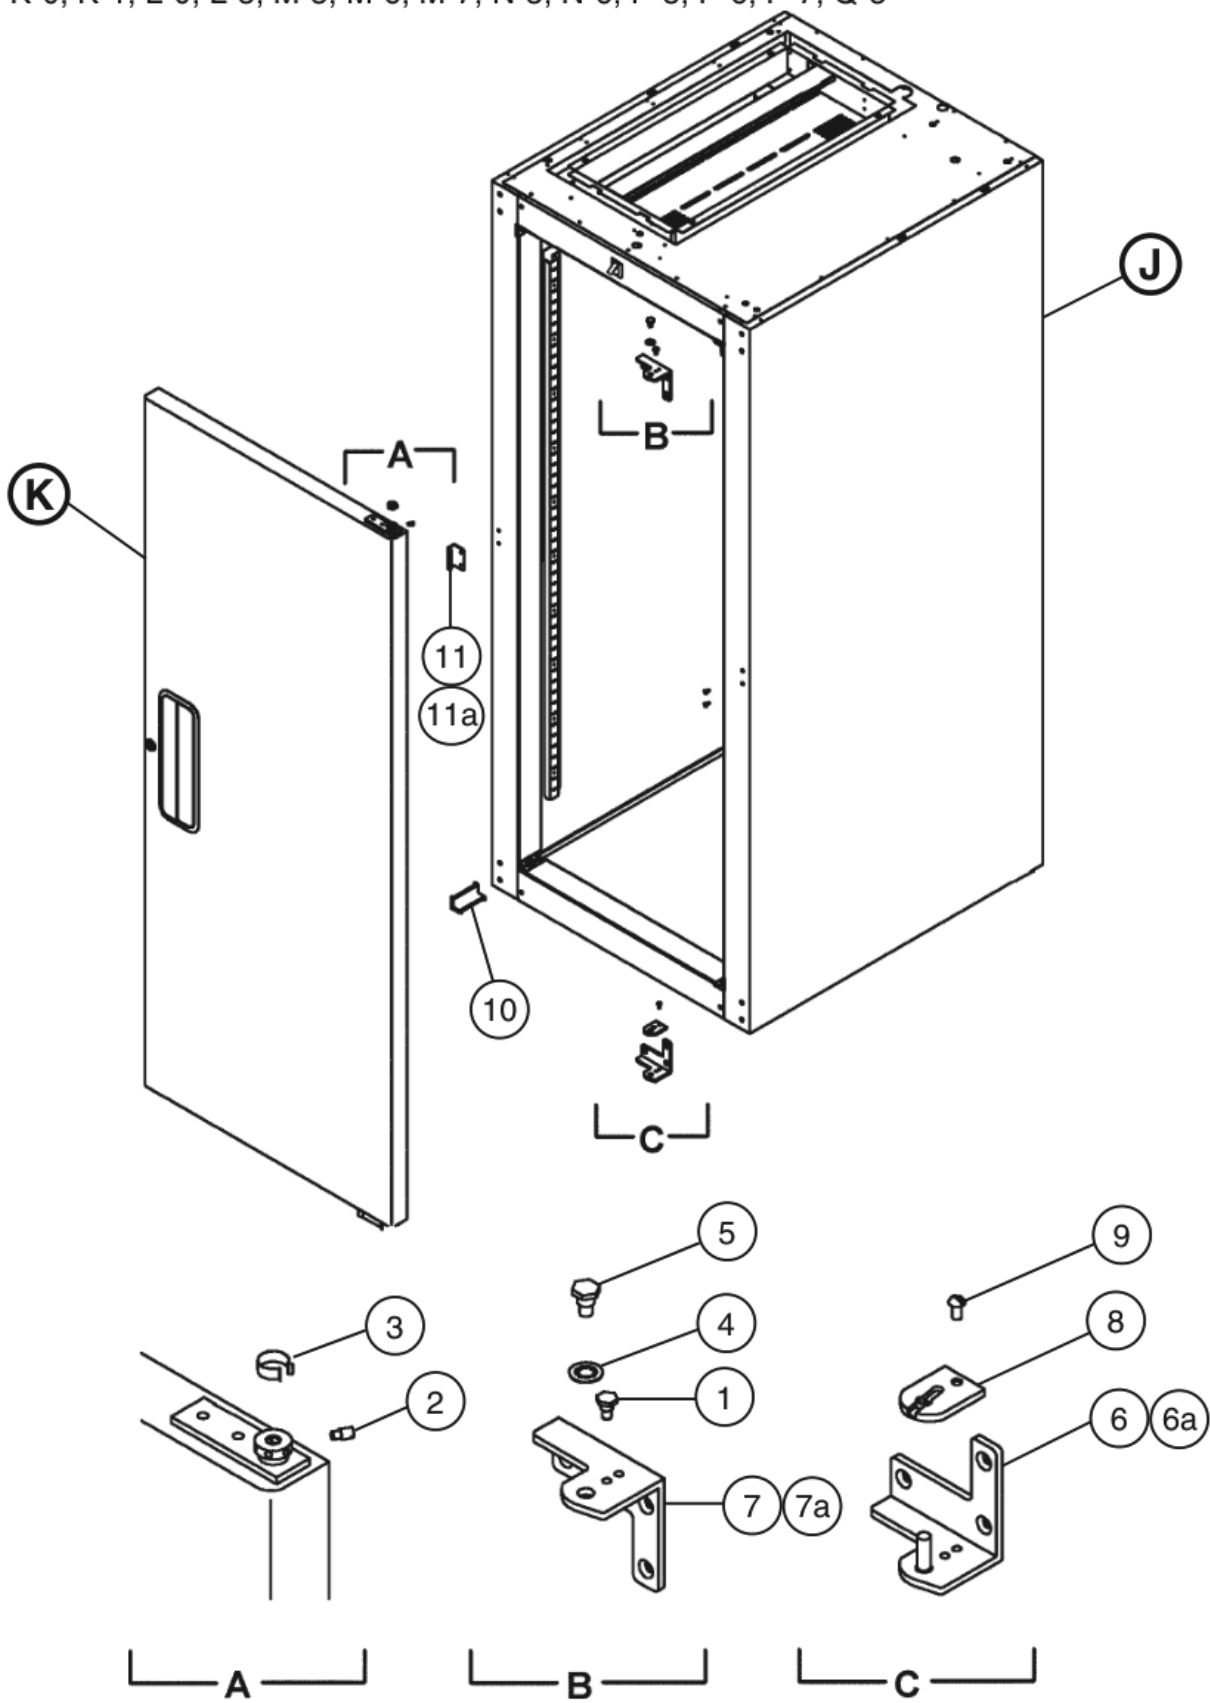

Title: D. Body-Final Model: RH1-AAC												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0	K-1 to Q-5							
J	Body – Prefinal	-	1A0298A03	1	1							
K	Door – Right	-	1A0318A03	1	1							
1	Hinge – Stop Pin	PS	4A2180-01	1	1							
2	Hinge – Tension Screw	PS	4A0446-01	1	1							
3	Hinge – Bushing Cover	SS	4A0445-01	1	1							
4	Hinge – Lock Washer	PS	4A0553-01	1	1							
5	Hinge – Pivot Pin (Top)	PS	4A2179-01	1	1							
6	Bracket – Door Hinge (LR)	PS	3A1626-01	1	1							
6a	Countersunk Screw	5x20, SS	7C42-0520	3	3							
7	Bracket – Door Hinge (UR)	PS	3A1580-01	1	1							
7a	Countersunk Screw	5x20, SS	7C42-0520	3	3							
8	Hinge – Stop Plate (R)	PS	4A0441-01	1	1							
9	Screw – Stop Plate	PS	4A0483-01	1	1							
10	Cover – Corner	ABS	3A0221-01	4	-							
		-	3A1751-01		4							
11	Plate – Strike (Side)	SS	4A0470-01	1	1							
11a	T2 Screw	4x8, SS	7P32-0408	2	2							

D. Body-Final **RH1-AAC-HD**


K-0, K-1, L-0, L-5, M-5, N-6, P-5, P-6, Q-5

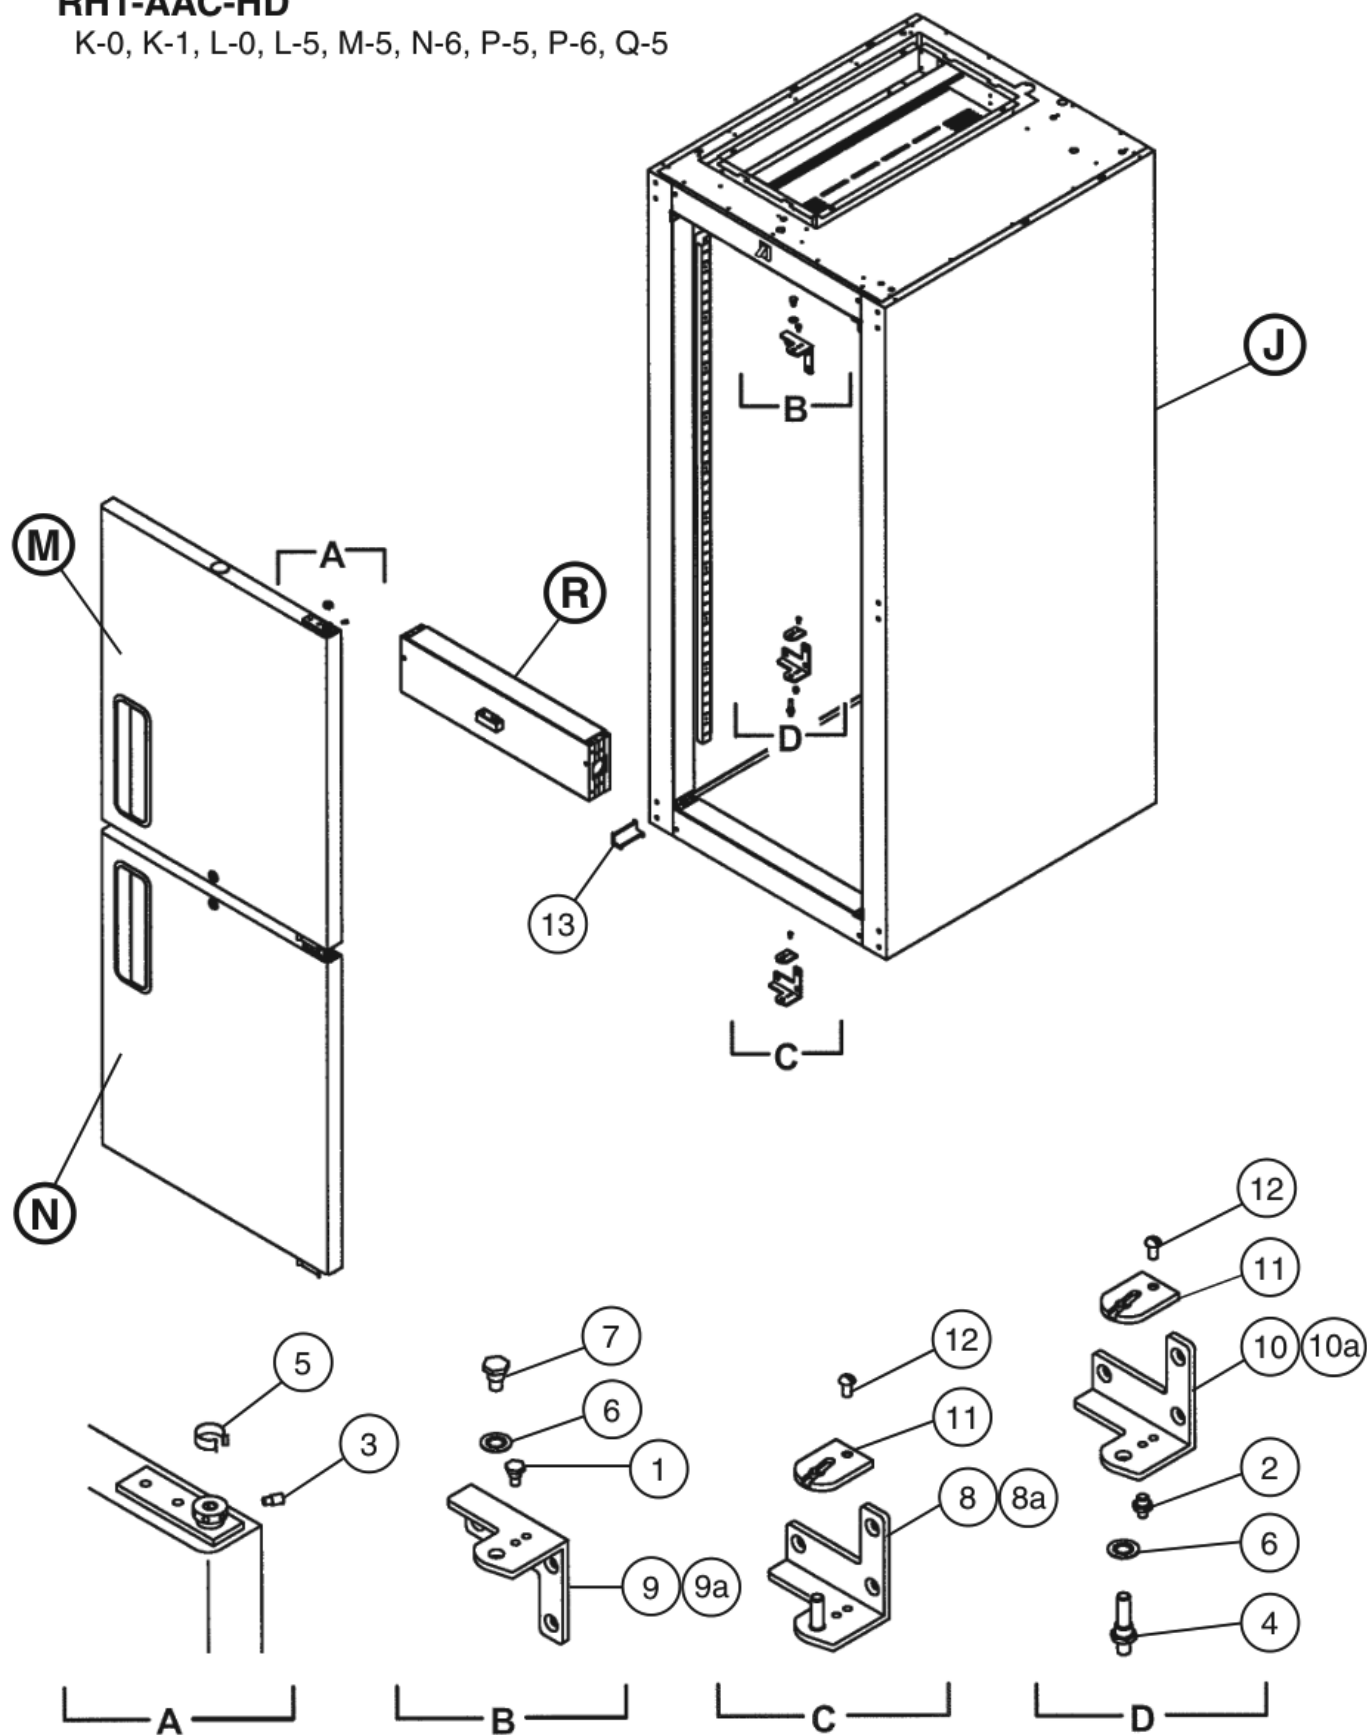

Title: D. Body-Final Model: RH1-AAC-HD												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0	K-1 to Q-5							
J	Body – Prefinal	-	1A0354A02	1	1							
M	Door – Half (UR)	-	1A0326A03	1	1							
N	Door – Half (LR)	-	1A0324A03	1	1							
R	Mullion – Horizontal	-	2A1323A02	1	1							
1	Hinge – Stop Pin	PS	4A2180-01	1	1							
2	Stop Pin	PS	4A1734-01	1	1							
3	Hinge – Tension Screw	SS	4A0446-01	2	2							
4	Pivot Pin	PS	4A1735-01	1	1							
5	Hinge – Bushing Cover	PS	4A0445-01	2	2							
6	Hinge – Lock Washer	PS	4A0553-01	2	2							
7	Hinge – Pivot Pin (Top)	PS	4A2179-01	1	1							
8	Bracket – Door Hinge (LR)	PS	3A1626-01	1	1							
8a	Countersunk Screw	5x20, SS	7C42-0520	3	3							
9	Bracket – Door Hinge (UR)	PS	3A1580-01	1	1							
9a	Countersunk Screw	5x20, SS	7C42-0520	3	3							
10	Bracket – Door Hinge (UL)	PS	3A1581-01	1	1							
10a	Countersunk Screw	5x20, SS	7C42-0520	3	3							
11	Hinge – Stop Plate (R)	PS	4A0441-01	2	2							
12	Screw – Stop Plate	PS	4A0483-01	2	2							
13	Cover – Corner	ABS	3A0221-01	4	-							
		-	3A1751-01		4							

D. Body-Final RH2-AAC

K-0, L-5, M-5, M-6, M-7, N-6, P-5, P-6, P-7, Q-5

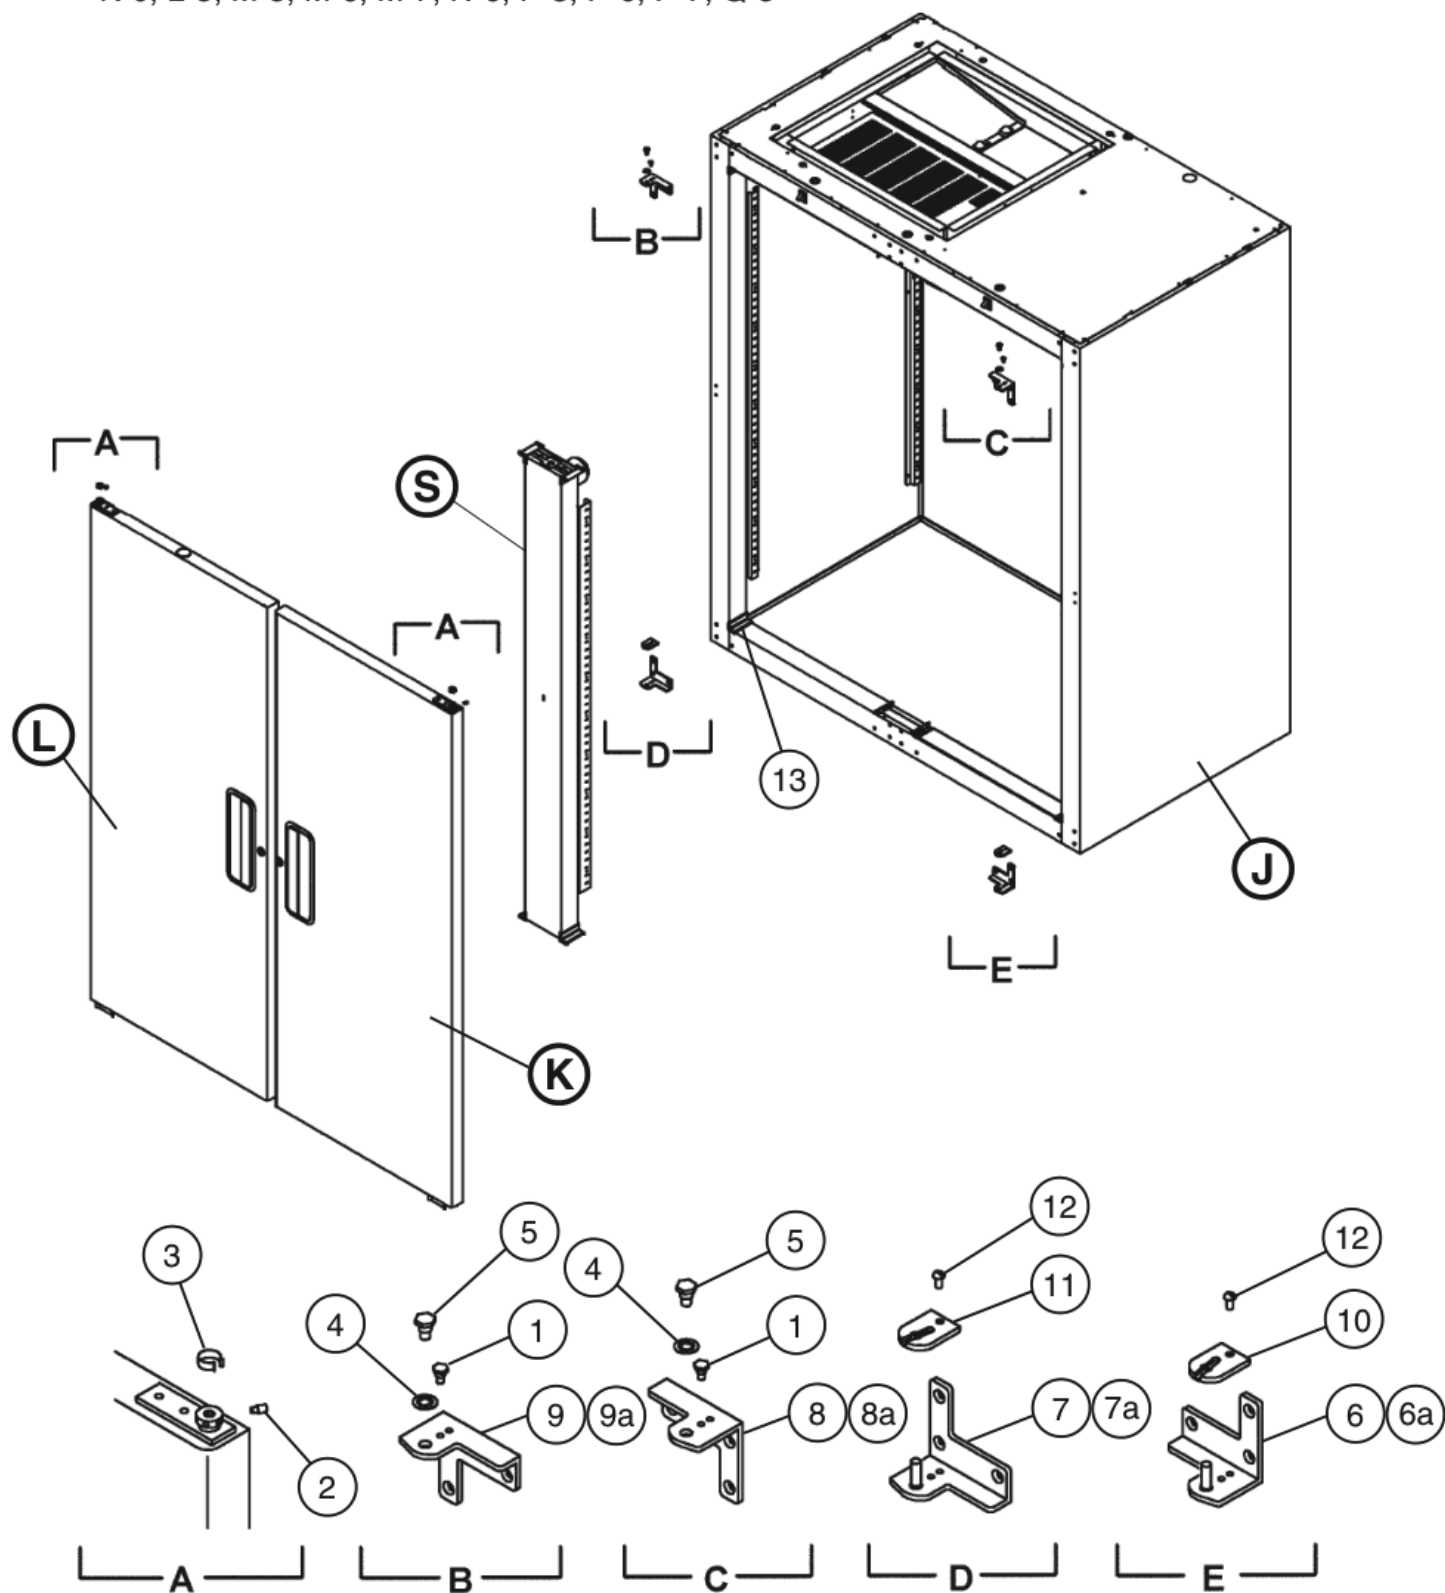


Title: **D. Body-Final** Model: **RH2-AAC**

Index No.	Description	Material or Model Number	Part Number	Required Number							
				K-0	L-5 to Q-5						
J	Body – Prefinal	-	2A1207A04	1	1						
K	Door – Right	-	1A0318A03	1	1						
L	Door – Left	-	1A0318A04	1	1						
S	Mullion – Vertical	-	2A1289A03	1	1						
1	Hinge – Stop Pin	PS	4A2180-01	2	2						
2	Hinge – Tension Screw	PS	4A0446-01	2	2						
3	Hinge – Bushing Cover	SS	4A0445-01	2	2						
4	Hinge – Lock Washer	PS	4A0553-01	2	2						
5	Hinge – Pivot Pin(Top)	PS	4A2179-01	2	2						
6	Bracket – Door Hinge(LR)	PS	3A1626-01	1	1						
6a	Countersunk Screw	5x20, SS	7C42-0520	3	3						
7	Bracket – Door Hinge(LL)	PS	3A1627-01	1	1						
7a	Countersunk Screw	5x20, SS	7C42-0520	3	3						
8	Bracket – Door Hinge(UR)	PS	3A1580-01	1	1						
8a	Countersunk Screw	5x20, SS	7C42-0520	3	3						
9	Bracket – Door Hinge(UL)	PS	3A1581-01	1	1						
9a	Countersunk Screw	5x20, SS	7C42-0520	3	3						
10	Hinge – Stop Plate(R)	PS	4A0441-01	1	1						
11	Hinge – Stop Plate(L)	PS	4A0441-02	1	1						
12	Screw – Stop Plate	PS	4A0483-01	2	2						
13	Cover – Corner	ABS	3A0221-01	8	-						
		-	3A1751-01		8						

D. Body-Final

RH2-AAC-HD


K-0, L-5, N-5, N-6, P-5, P-6, Q-5

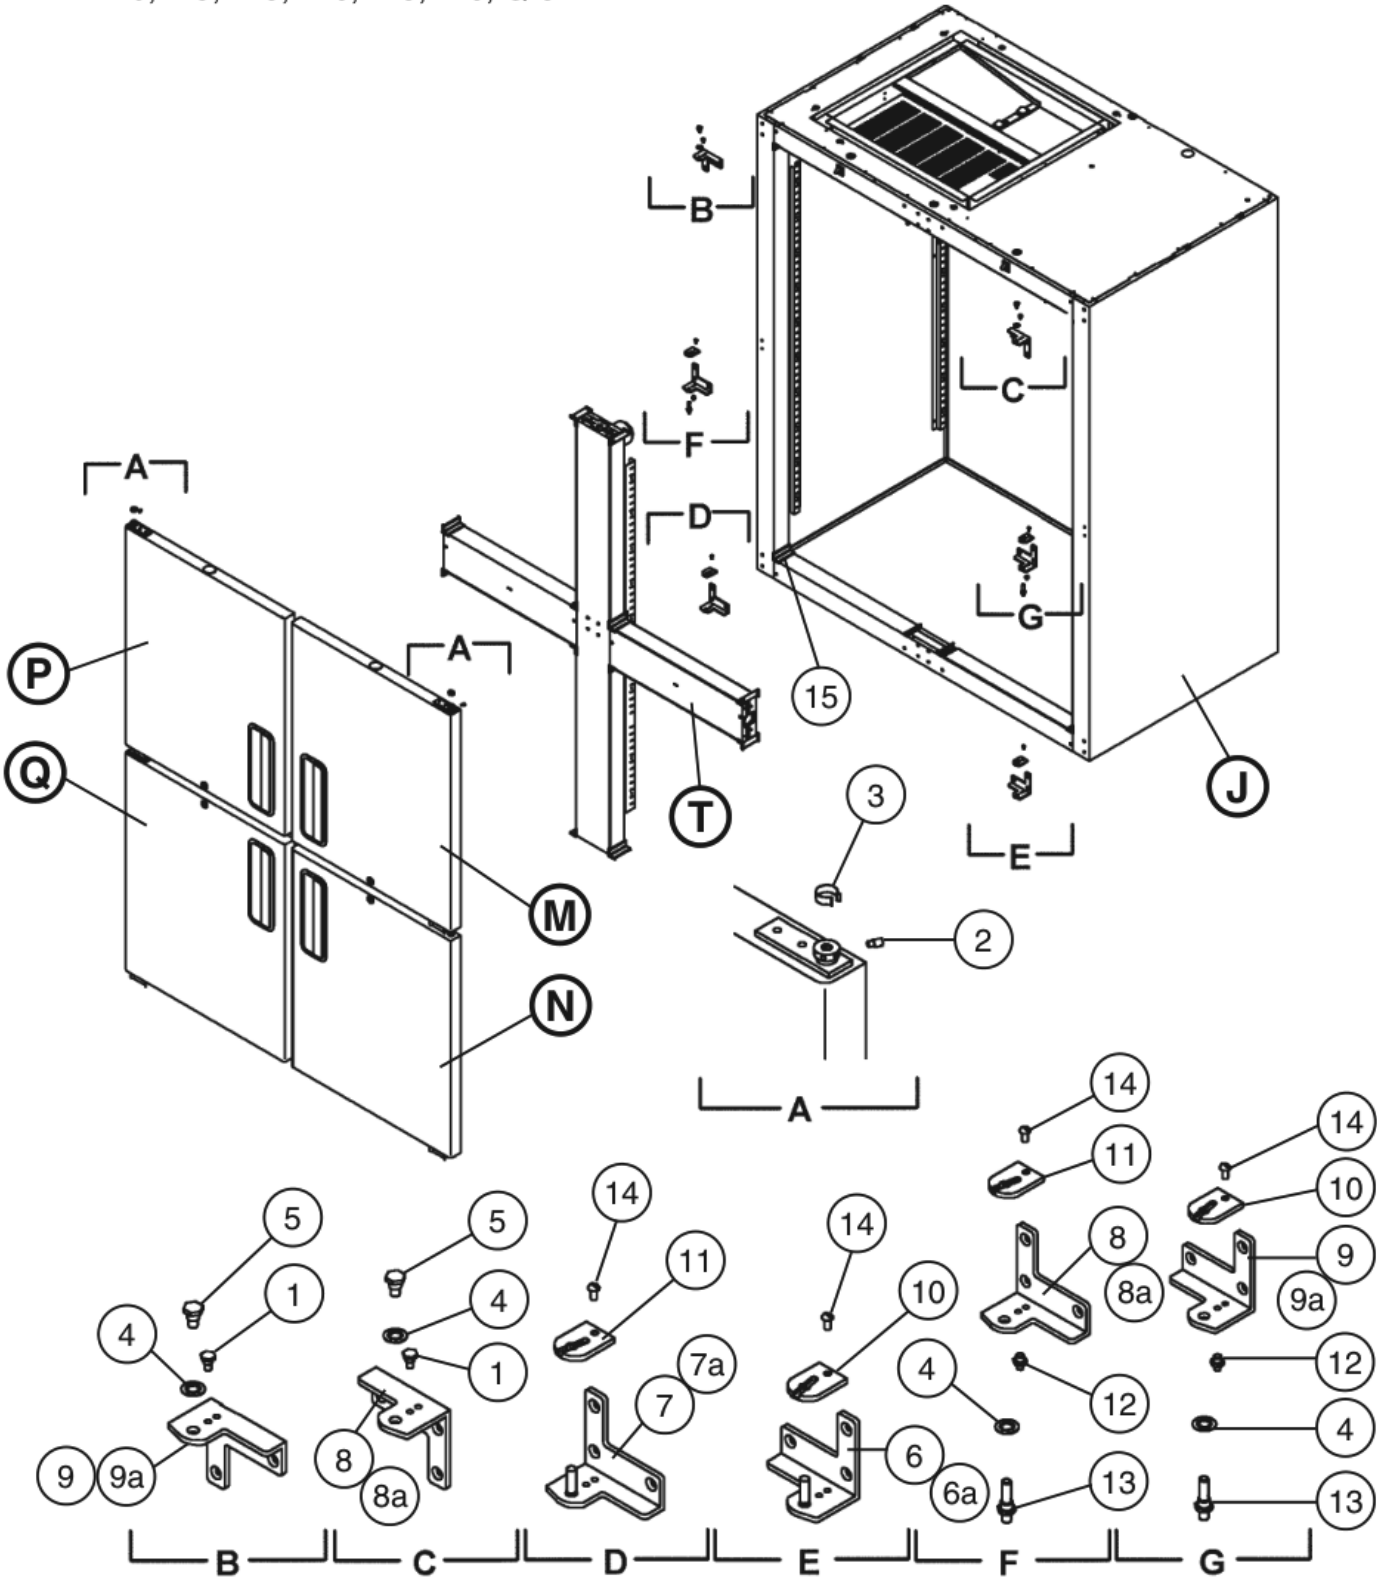

Title: D. Body-Final Model: RH2-AAC-HD												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0	L-5 to Q-5							
J	Body – Prefinal	-	2A1347A02	1	1							
M	Door – Half (UR)	-	1A0326A03	1	1							
N	Door – Half (LR)	-	1A0324A03	1	1							
P	Door – Half (UL)	-	1A0324A04	1	1							
Q	Door – Half (LL)	-	1A0326A04	1	1							
T	Mullion – Cross	-	2A1350A02	1	1							
1	Hinge – Stop Pin	PS	4A2180-01	2	2							
2	Hinge – Tension Screw	PS	4A0446-01	4	4							
3	Hinge – Bushing Cover	SS	4A0445-01	4	4							
4	Hinge – Lock Washer	PS	4A0553-01	4	4							
5	Hinge – Pivot Pin (Top)	PS	4A2179-01	2	2							
6	Bracket – Door Hinge (LR)	PS	3A1626-01	1	1							
6a	Countersunk Screw	5x20, SS	7C42-0520	3	3							
7	Bracket – Door Hinge (LL)	PS	3A1627-01	1	1							
7a	Countersunk Screw	5x20, SS	7C42-0520	3	3							
8	Bracket – Door Hinge (UR)	PS	3A1580-01	2	2							
8a	Countersunk Screw	5x20, SS	7C42-0520	6	6							
9	Bracket – Door Hinge (UL)	PS	3A1581-01	2	2							
9a	Countersunk Screw	5x20, SS	7C42-0520	6	6							
10	Hinge – Stop Plate (R)	PS	4A0441-01	2	2							
11	Hinge – Stop Plate (L)	PS	4A0441-02	2	2							
12	Stop Pin	PS	4A1734-01	2	2							
13	Pivot Pin	PS	4A1735-01	2	2							
14	Screw – Stop Plate	PS	4A0483-01	4	4							
15	Cover – Corner	ABS	3A0221-01	16	-							
		-	3A1751-01		16							


D. Body-Final RH3-AAC

K-0, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, Q-5

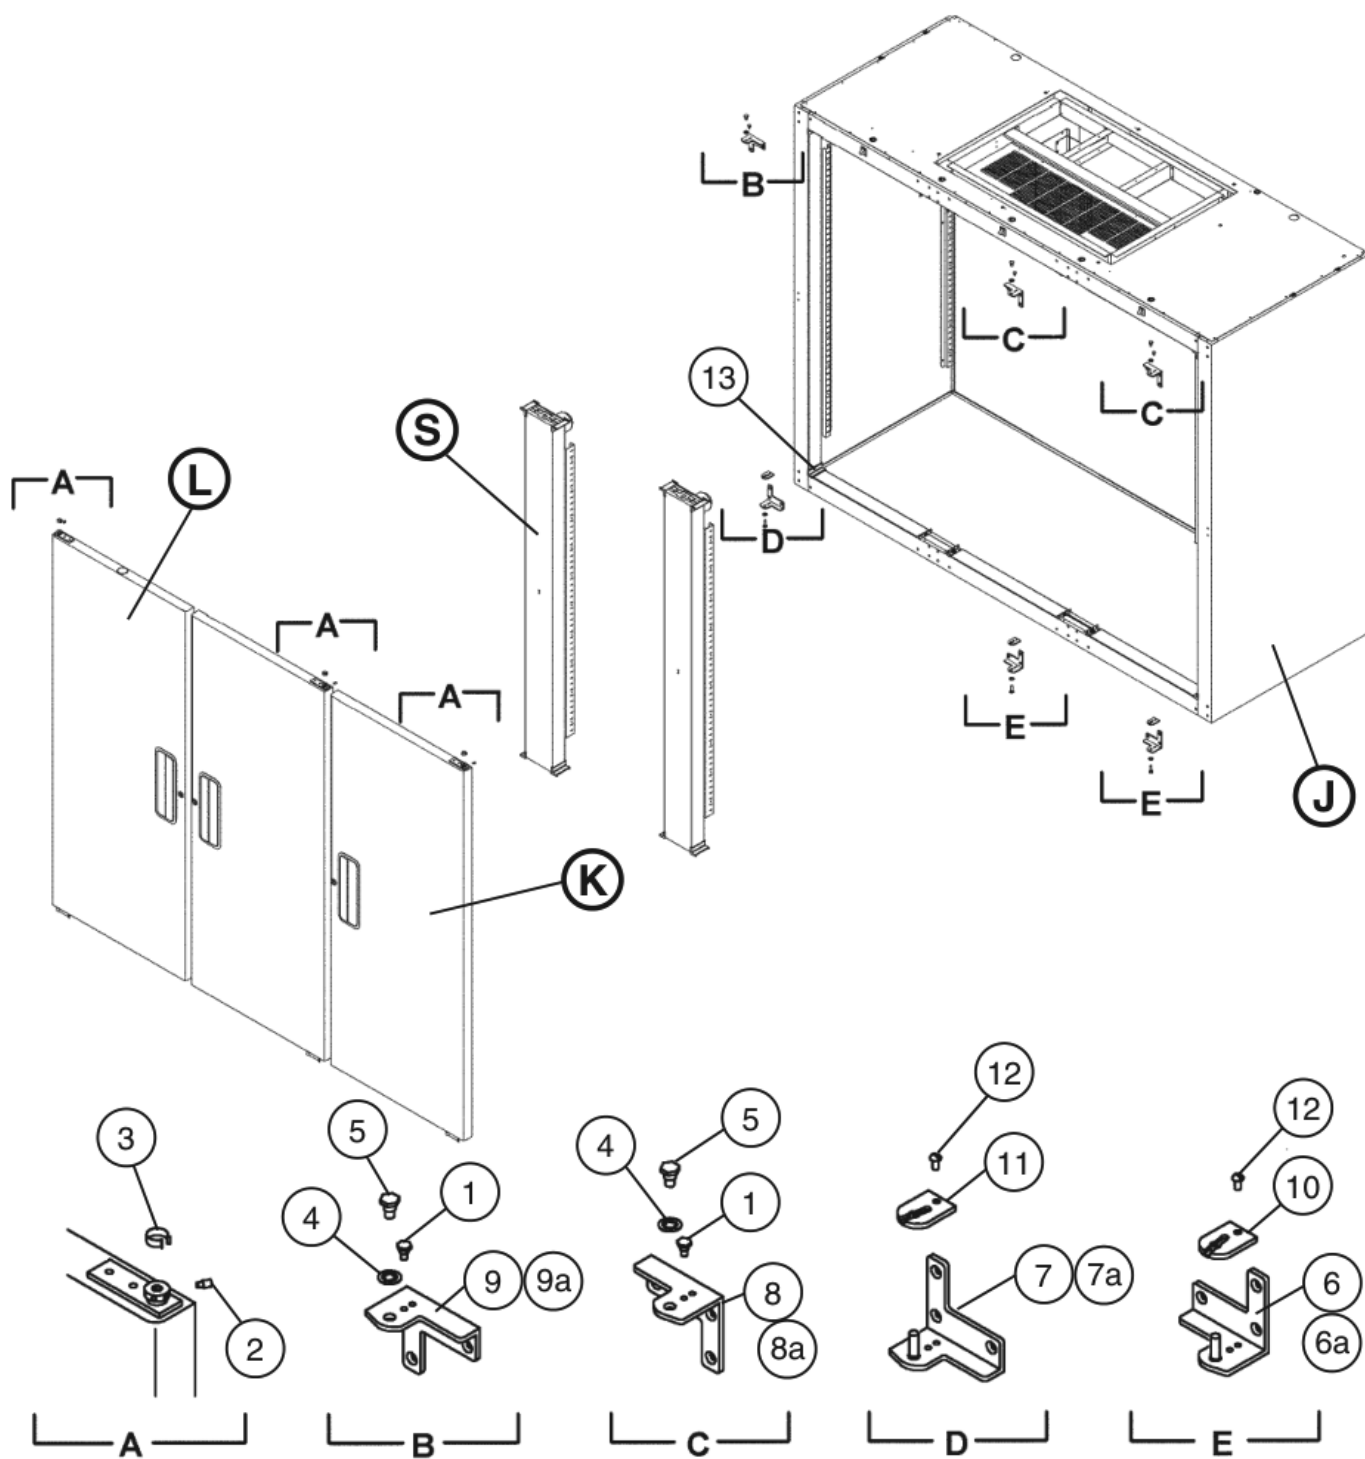

Title: D. Body-Final Model: RH3-AAC												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0 to Q-5								
J	Body – Prefinal	-	2A1132A04	1								
K	Door – Right	-	1A0318A03	2								
L	Door – Left	-	1A0318A04	1								
S	Mullion – Vertical	-	2A1289A03	2								
1	Hinge – Stop Pin	PS	4A2180-01	3								
2	Hinge – Tension Screw	PS	4A0446-01	3								
3	Hinge – Bushing Cover	SS	4A0445-01	3								
4	Hinge – Lock Washer	PS	4A0553-01	3								
5	Hinge – Pivot Pin (Top)	PS	4A2179-01	3								
6	Bracket – Door Hinge (LR)	PS	3A1626-01	2								
6a	Countersunk Screw	5x20, SS	7C42-0520	6								
7	Bracket – Door Hinge (LL)	PS	3A1627-01	1								
7a	Countersunk Screw	5x20, SS	7C42-0520	3								
8	Bracket – Door Hinge (UR)	PS	3A1580-01	2								
8a	Countersunk Screw	5x20, SS	7C42-0520	6								
9	Bracket – Door Hinge (UL)	PS	3A1581-01	1								
9a	Countersunk Screw	5x20, SS	7C42-0520	3								
10	Hinge – Stop Plate (R)	PS	4A0441-01	2								
11	Hinge – Stop Plate (L)	PS	4A0441-02	1								
12	Screw – Stop Plate	PS	4A0483-01	3								
13	Cover – Corner	ABS	3A1751-01	12								

D. Body-Final
RH3-AAC-HD
 K-0, N-6, Q-5

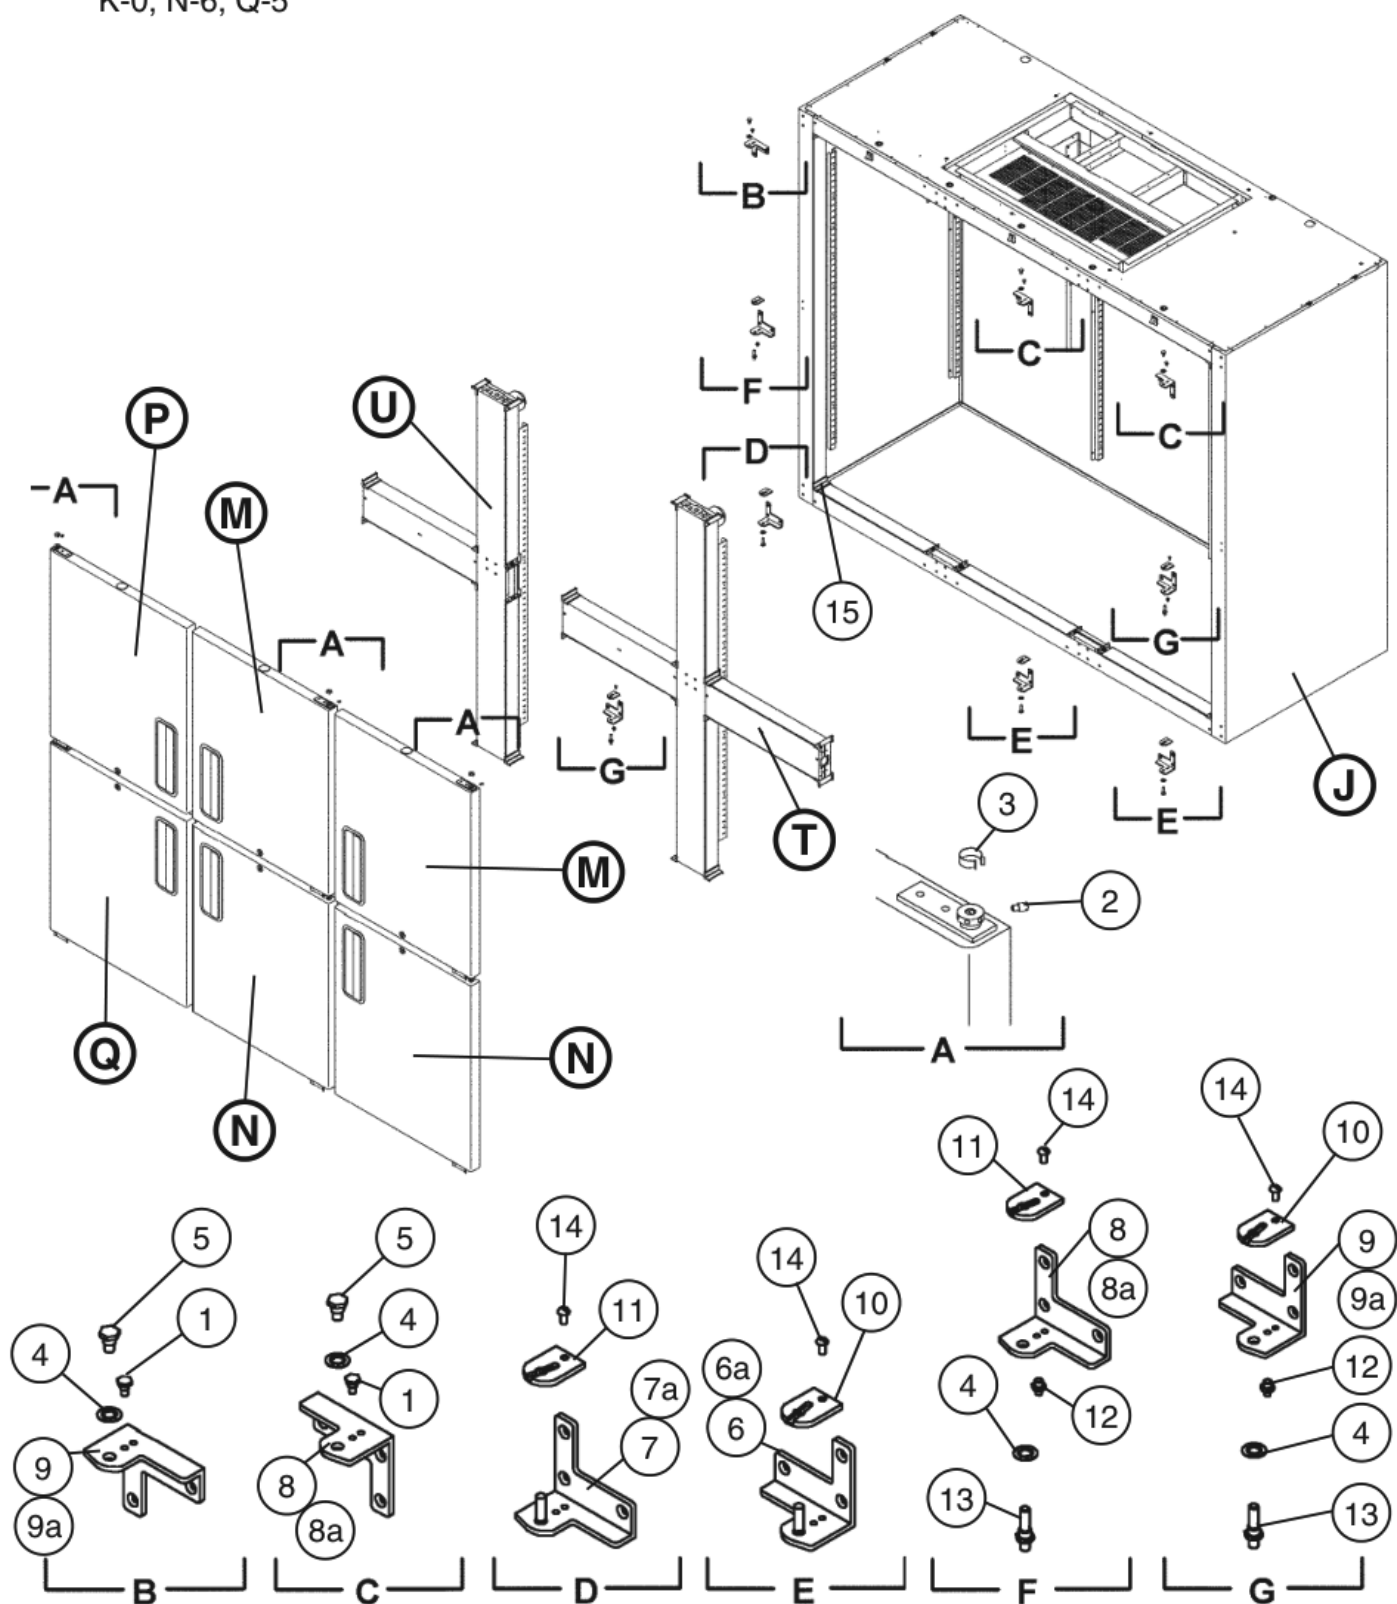


Title: D. Body-Final Model: RH3-AAC-HD												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0 to Q-5								
J	Body – Prefinal	-	2A1399A02	1								
M	Door – Half (UR)	-	1A0326A03	2								
N	Door – Half (LR)	-	1A0324A03	2								
P	Door – Half (UL)	-	1A0324A04	1								
Q	Door – Half (LL)	-	1A0326A04	1								
T	Mullion – Cross	-	2A1350A02	1								
U	Mullion – Tee (L)		2A1385A02	1								
1	Hinge – Stop Pin	PS	4A2180-01	3								
2	Hinge – Tension Screw	PS	4A0446-01	6								
3	Hinge – Bushing Cover	SS	4A0445-01	6								
4	Hinge – Lock Washer	PS	4A0553-01	6								
5	Hinge – Pivot Pin (Top)	PS	4A2179-01	3								
6	Bracket – Door Hinge (LR)	PS	3A1626-01	2								
6a	Countersunk Screw	5x20, SS	7C42-0520	6								
7	Bracket – Door Hinge (LL)	PS	3A1627-01	1								
7a	Countersunk Screw	5x20, SS	7C42-0520	3								
8	Bracket – Door Hinge (UR)	PS	3A1580-01	3								
8a	Countersunk Screw	5x20, SS	7C42-0520	9								
9	Bracket – Door Hinge (UL)	PS	3A1581-01	3								
9a	Countersunk Screw	5x20, SS	7C42-0520	9								
10	Hinge – Stop Plate (R)	PS	4A0441-01	4								
11	Hinge – Stop Plate (L)	PS	4A0441-02	2								
12	Stop Pin	PS	4A1734-01	3								
13	Pivot Pin	PS	4A1735-01	3								
14	Screw – Stop Plate	PS	4A0483-01	6								
15	Cover – Corner	ABS	3A1751-01	24								

E. Control Box Assembly

RH1-AAC(-HD), RH2-AAC(-HD), RH3-AAC(-HD)


K-0, K-1, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

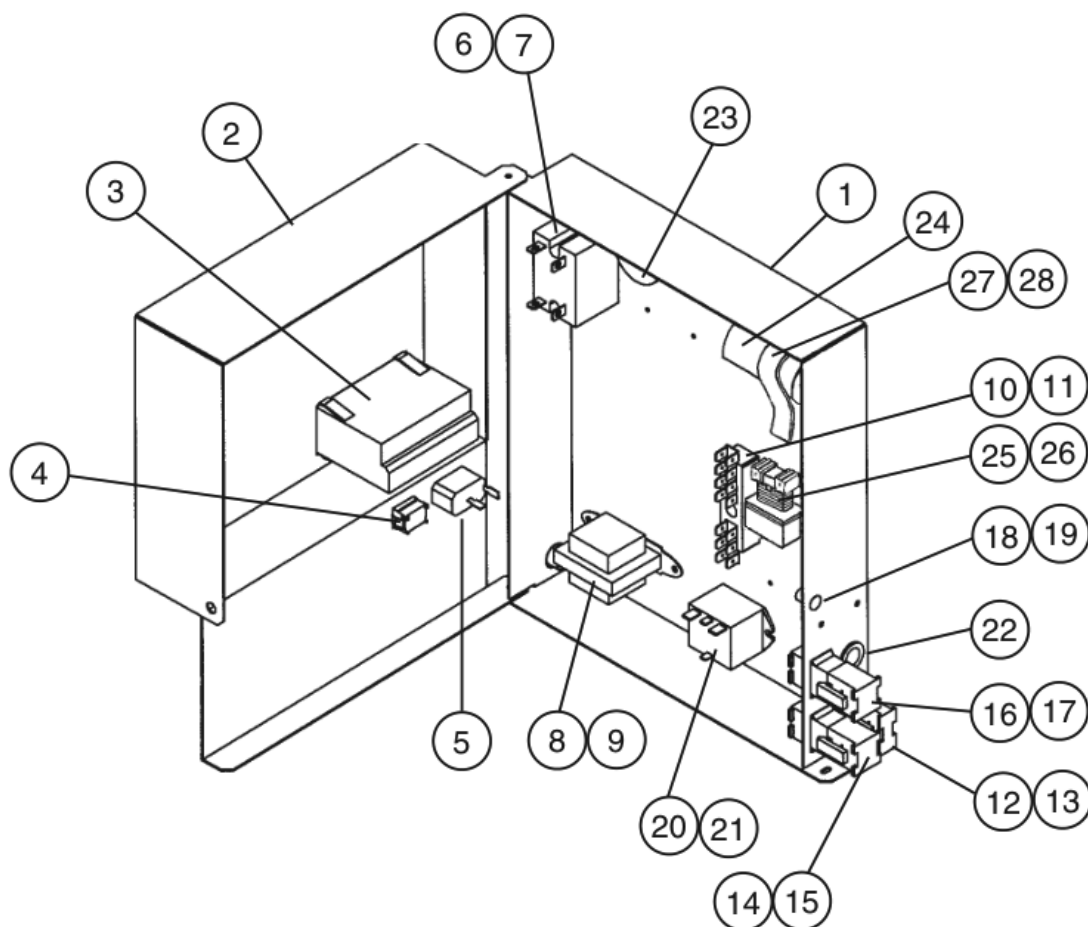

Title: E. Control Box Assembly Model: RH1-AAC(-HD), RH2-AAC(-HD), RH3-AAC(-HD)											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				K-0 K-1	L-0 L-5	M-5 to N-5	N-6 to P-5	P-6 to Q-5			
1	Base – Control Box	GS	2A1887-01	1	1	1	1	1			
2	Cover – Control Box	GS	2A1833-01	1	1	1	1	1			
3	Board – Control Display Controller	Use latest for all aux. codes	4A2203-01	1	1	1	1	-			
			3A3372-01					1			
4	Switch – Rocker	1801.110	4A0418-01	1	1	1	1	1			
5	Switch – Toggle	780K21	4A0424-01	1	1	1	1	1			
6	Relay – Compressor	HE1aN- AC120V	4A1307-01	1	1	1	1	1			
7	Tapping Screw	3x8	431415-01	1	1	1	1	1			
8	Transformer	BE110805GAA	4A2202-01	1	1	1	1	1			
9	Tapping Screw	3x8	431415-01	2	2	2	2	2			


Title: E. Control Box Assembly Model: RH1-AAC(-HD), RH2-AAC(-HD), RH3-AAC(-HD)												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0 K-1	L-0 L-5	M-5 to N-5	N-6 to P-5	P-6 to Q-5				
10	Terminal Block	RH1-AAC(-HD) RH2-AAC(-HD) ESB1-6-8	4A1540-01	1	1	-						
		RH1-AAC(-HD) RH2-AAC(-HD) ESB2-323-424	4A2619-01			1	1	1				
		RH3-AAC(-HD) ESB1-6-8	4A1540-01	1	1	1	-					
		RH3-AAC(-HD) ESB2-323-424	4A2619-01				1	1				
11	Tapping Screw	3x8	431415-01	1	1	1	1	1				
12	Plug Housing	3/12/35	4A0425-01	1	1	1	1	1				
13	Receptacle Housing	03-12-1036	4A0426-01	1	1	1	1	1				
14	Plug Housing(6 Pin)	3191-06P	412832-03	1	1	1	1	1				
15	Receptacle Housing(6 Pin)	3191-06R1	412831-03	1	1	1	1	1				
16	Plug Housing(6 Pin)	3191-06P	412832-12	1	1	1	1	1				
17	Receptacle Housing(6 Pin)	3191-06R1	412831-12	1	1	1	1	1				
18	Insert – Threaded	M5	4A0407-01	1	1	1	1	1				
19	Truss Head Screw	5x10	7C32-0510	1	1	1	1	1				
20	Relay – Door Switch	JA1b-TM-AC12V	4A2268-01	1	1	1	1	1				
21	Tapping Screw	3x8	431415-01	2	2	2	2	2				
22	Bushing	SB-625-8	420470-01	1	1	1	1	1				
23	Bushing	RH1-AAC(-HD) Only SB-1500-21	420470-06	1	-							
24	Capacitor – Starting	RH3-AAC(-HD) Only	3A0076-14	1	1	1	1	1				
25	Relay – Start	RH3-AAC(-HD) Only	4A1709-02	1	1	1	1	1				
26	Truss Head Screw	RH3-AAC(-HD) Only 4x8, SS	7C32-0408	1	1	1	1	1				
27	Strap	RH3-AAC(-HD) Only GS	434580-05	1	1	-						
			434580-03			1	1	1				
28	Tapping Screw	RH3-AAC(-HD) Only 3x8	431415-01	1	1	1	1	1				

F. Fan-Evaporator Assembly
RH1-AAC(-HD)
 K-0, K-1, L-0, L-5

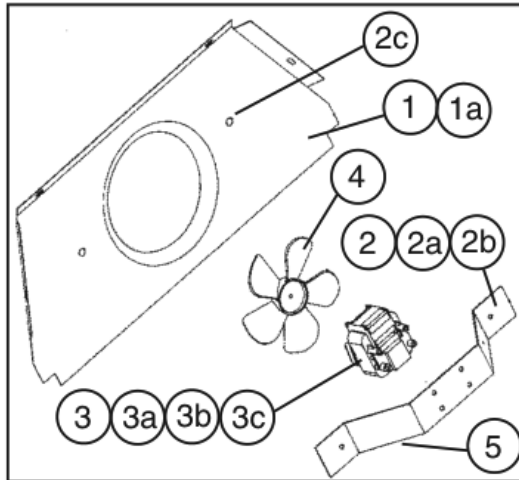


HS-3541

See next page for information about non-interchangeable part change.

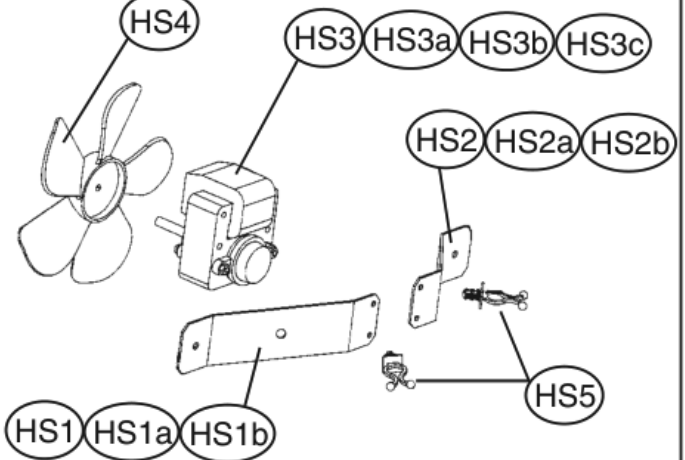

F. Fan-Evaporator Assembly
RH1-AAC(-HD)
 M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

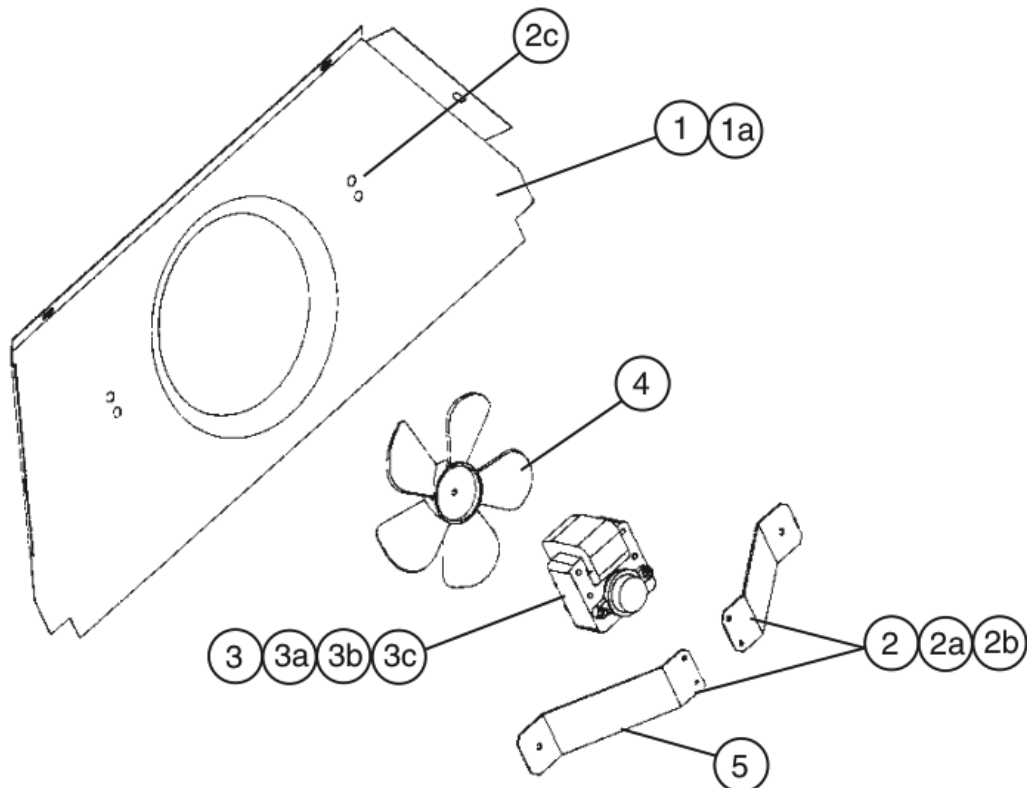

Title: **F. Fan-Evaporator Assembly** Model: **RH1-AAC(-HD)**

Index No.	Description	Material or Model Number	Part Number	Required Number							
				K-0 to L-5	M-5 to Q-5						
1	Shroud – Evaporator		2A0846-01	Note: Parts are not interchangeable. For serial numbers M-5 B and earlier, see the information below. For serial numbers M-5 C and later, order the appropriate parts from this chart.	1						
1a	Truss Head Screw	4x16, SS	7C32-0416		4						
2	Bracket – Fan Motor		3A2501-01		2						
2a	Truss Head Screw	5x12, SS	7C32-0512		2						
2b	Lock Washer		4A0459-01		2						
2c	Threaded Insert	M5	4A0407-01		2						
3	Fan Motor – Evaporator	SHINKO	4A2563-01		1						
3a	Truss Head Screw	4x40, SS	7C32-0440		4						
3b	Split Lock Washer	4, SS	7L22-0400		4						
3c	Hex Nut	4, SS	7N12-0400		4						
4	Blade – Evaporator Fan		4A2378-01		1						
5	Wire Tie (Twist)		4A1223-01		1						

Note for Models Having Serial Number M5 B and Earlier

If your model falls into this time frame and you need to replace parts in the assembly, review the scenarios below and follow the appropriate solution.

- a. Unit's evaporator shroud has only two holes or has four holes but only the lower two holes are threaded.

Solution: Order HS-3541 that contains a motor (Shinko), brackets, blade, and all fasteners required for mounting to the shroud using the existing threaded holes.

- b. Unit's evaporator shroud has four threaded holes and a Jakel motor.

Solution: Order a new motor (Shinko), brackets, fan blade, and all fasteners listed in the parts list above. Attach the brackets to the upper two holes on the shroud.


HS-3541-Shinko Fan Motor Conversion

Index No.	Description	Material or Model Number	Part Number	Required Number							
				M5 B and earlier							
HS1	Bracket – Fan Motor (L)		3A2357-01	1							
HS1a	Truss Head Screw	5x12, SS	7C32-0512	1							
HS1b	Lock Washer		4A0459-01	1							
HS2	Bracket – Fan Motor (R)		3A2358-01	1							
HS2a	Truss Head Screw	5x12, SS	7C32-0512	1							
HS2b	Lock Washer		4A0459-01	1							
HS3	Fan Motor – Evaporator	Shinko	4A2563-01	1							
HS3a	Truss Head Screw	4x40, SS	7C32-0440	4							
HS3b	Split Lock Washer	M4, SS	7L22-0400	4							
HS3c	Hex Nut	M4, SS	7N12-0400	4							
HS4	Blade – Evaporator Fan		4A2378-01	4							
HS5	Wire Tie (Twist)		4A1223-01	2							

F. Evaporator-Shroud Assembly

RH2-AAC(-HD)

K-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

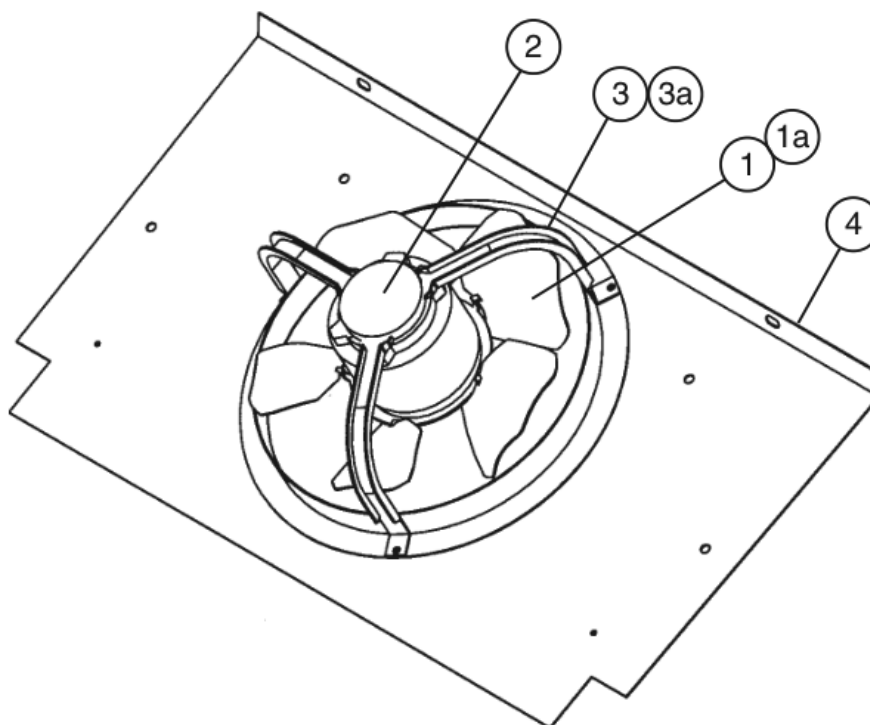


Title: F. Evaporator-Shroud Assembly Model: RH2-AAC(-HD)												
Index No.	Description	Material or Model Number	Part Number	K-0 to Q-5	Required Number							
1	Blade – Fan (Pusher)	Air Drive Inc. AD9CCW30UBA	3A0438-01	1								
1a	Hex Nut	-	4A1345-01	1								
2	Motor – Evap Fan	Morrill Motors PSC4BE9BEA1	4A0413-01	1								
3	Orifice – Evap Fan	SS	4A0412-01	1								
3a	T2 Screw	4x8, SS, SS	7P32-0408	3								
4	Shroud – Evap	SS	1A0100-01	1								

F. Evaporator-Shroud Assembly

RH3-AAC(-HD)

K-0, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, Q-5

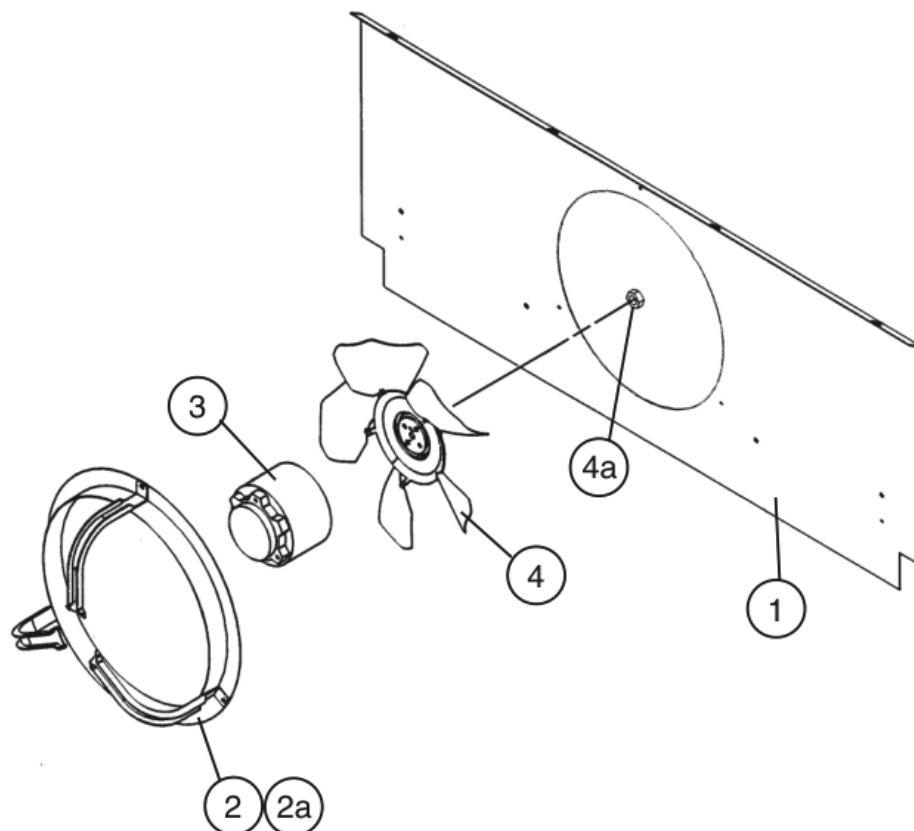


Title: F. Evaporator-Shroud Assembly Model: RH3-AAC(-HD)											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				K-0 to N-6							
1	Shroud – Evaporator	-	1A0248-01	1							
2	Orifice – Evaporator Fan	-	4A0412-01	1							
2a	T2 Screw	4x8, SS	7P32-0408	3							
3	Motor – Evaporator Fan		4A0413-01	1							
4	Blade – Fan (Pusher)	-	3A0438-01	1							
4a	Hex Nut	-	4A1345-01	1							

G. Evaporator Assembly

RH1-AAC(-HD)

K-0, K-1, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

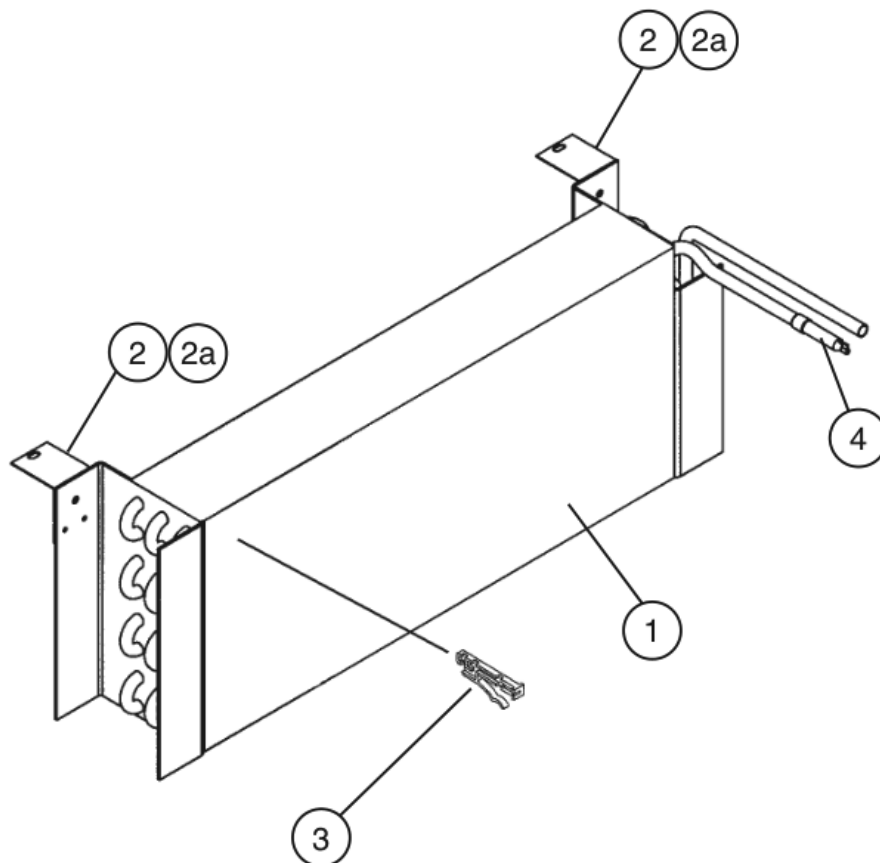


Title: G. Evaporator Assembly Model: RH1-AAC(-HD)											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				K-0 to P-7	Q-5						
1	Evaporator	Heatcraft 03EZ0603K-8x19	2A1262-01	1	1						
2	Bracket – Evaporator	SS	4A2542-01	2	2						
2a	T2 Screw	4x8, SS	7P32-0408	4	4						
3	Thermistor – Defrost	Thermistor is included w/ controller. (Assembly E) Thermistor is not replaceable as a standalone part.		-	-						
	Clip – Thermistor		4A3248G01	1	1						
4	Copper Tube	CU	4A0554-02	1	1						

G. Evaporator Assembly

RH2-AAC(-HD)


K-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

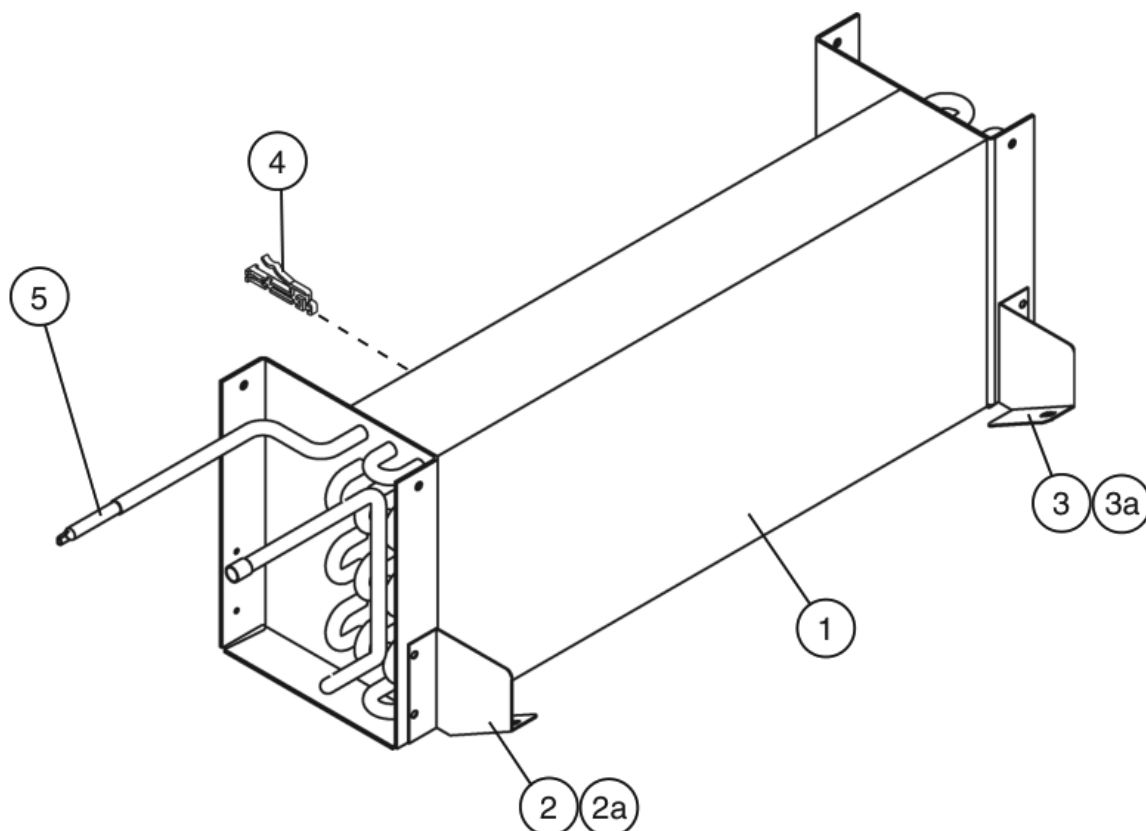

Title: G. Evaporator Assembly Model: RH2-AAC(-HD)											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				K-0 to P-7	Q-5						
1	Evaporator	Heatcraft 602899	2A1382-01	1	1						
2	Bracket – Evap Shroud (R)	SS	4A0545-01	1	1						
2a	T2 Screw	4x8, SS	7P32-0408	2	2						
3	Bracket – Evap Shroud (L)	SS	4A0548-01	1	1						
3a	T2 Screw	4x8, SS	7P32-0408	2	2						
4	Thermistor – Defrost	Thermistor is included w/ controller. (Assembly E) Thermistor is not replaceable as a standalone part.		-	-						
	Clip – Thermistor		4A3248G01	1	1						
5	Copper – Tube	CU	4A0554-04	1	1						

G. Evaporator Assembly RH3-AAC(-HD)

K-0, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, Q-5

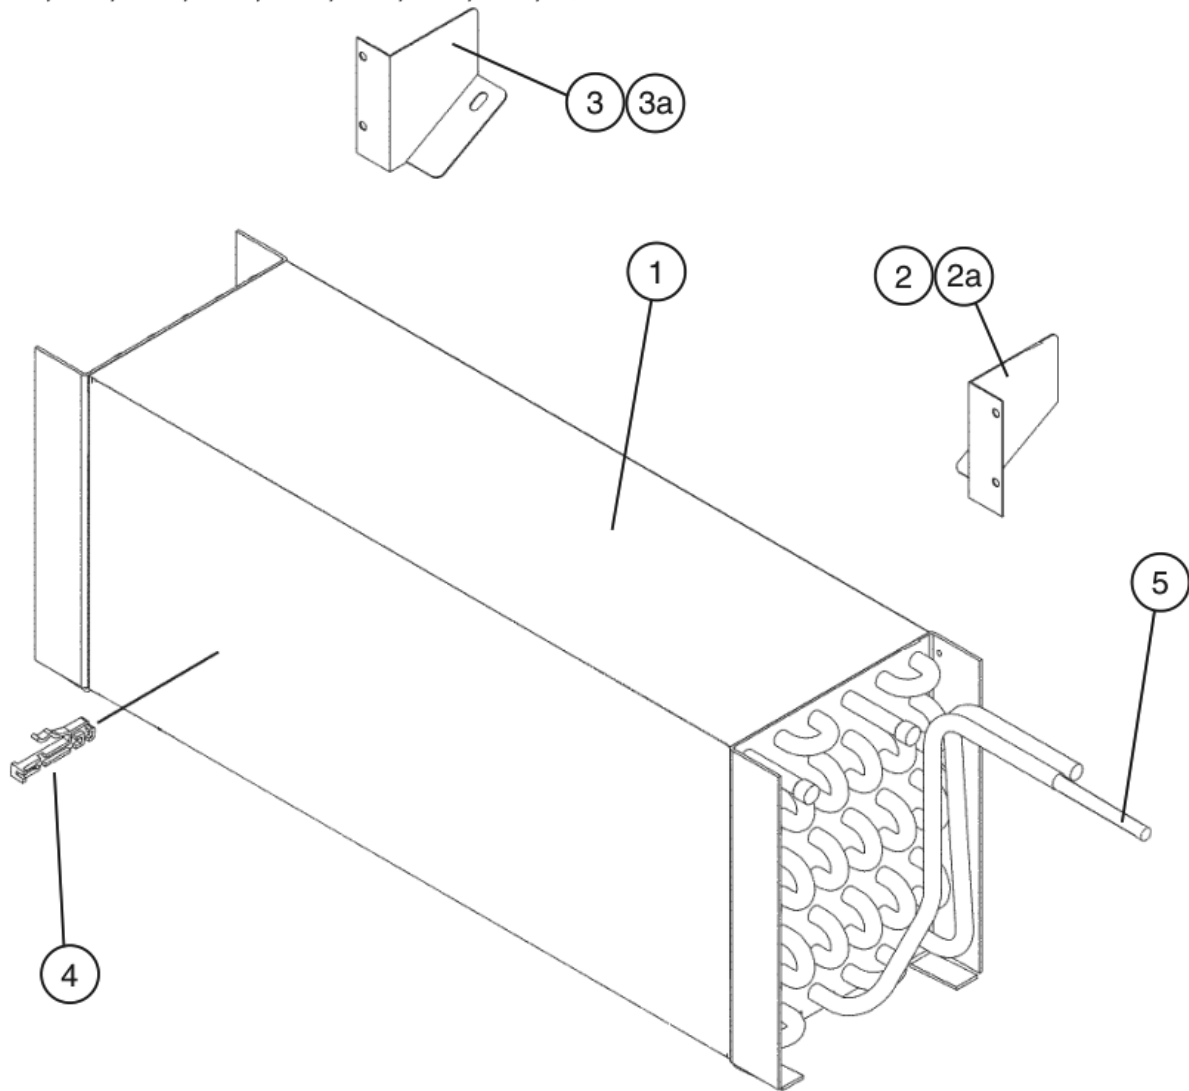


Title: G. Evaporator Assembly Model: RH3-AAC(-HD)											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				K-0 to P-5	Q-5						
1	Evaporator	-	2A1159-01	1	1						
2	Bracket – Evap Shroud (R)	SS	4A0545-01	1	1						
2a	T2 Screw	4x8, SS	7P32-0408	2	2						
3	Bracket – Evap Shroud (L)	SS	4A0548-01	1	1						
3a	T2 Screw	4x8, SS	7P32-0408	2	2						
4	Thermistor – Defrost	Thermistor is included w/ controller. (Assembly E) Thermistor is not replaceable as a standalone part.		-	-						
	Clip – Thermistor		4A3248G01	1	1						
5	Copper Tube	CU	4A0554-05	1	1						

H. Condenser Assembly

RH1-AAC(-HD)


K-0, K-1, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

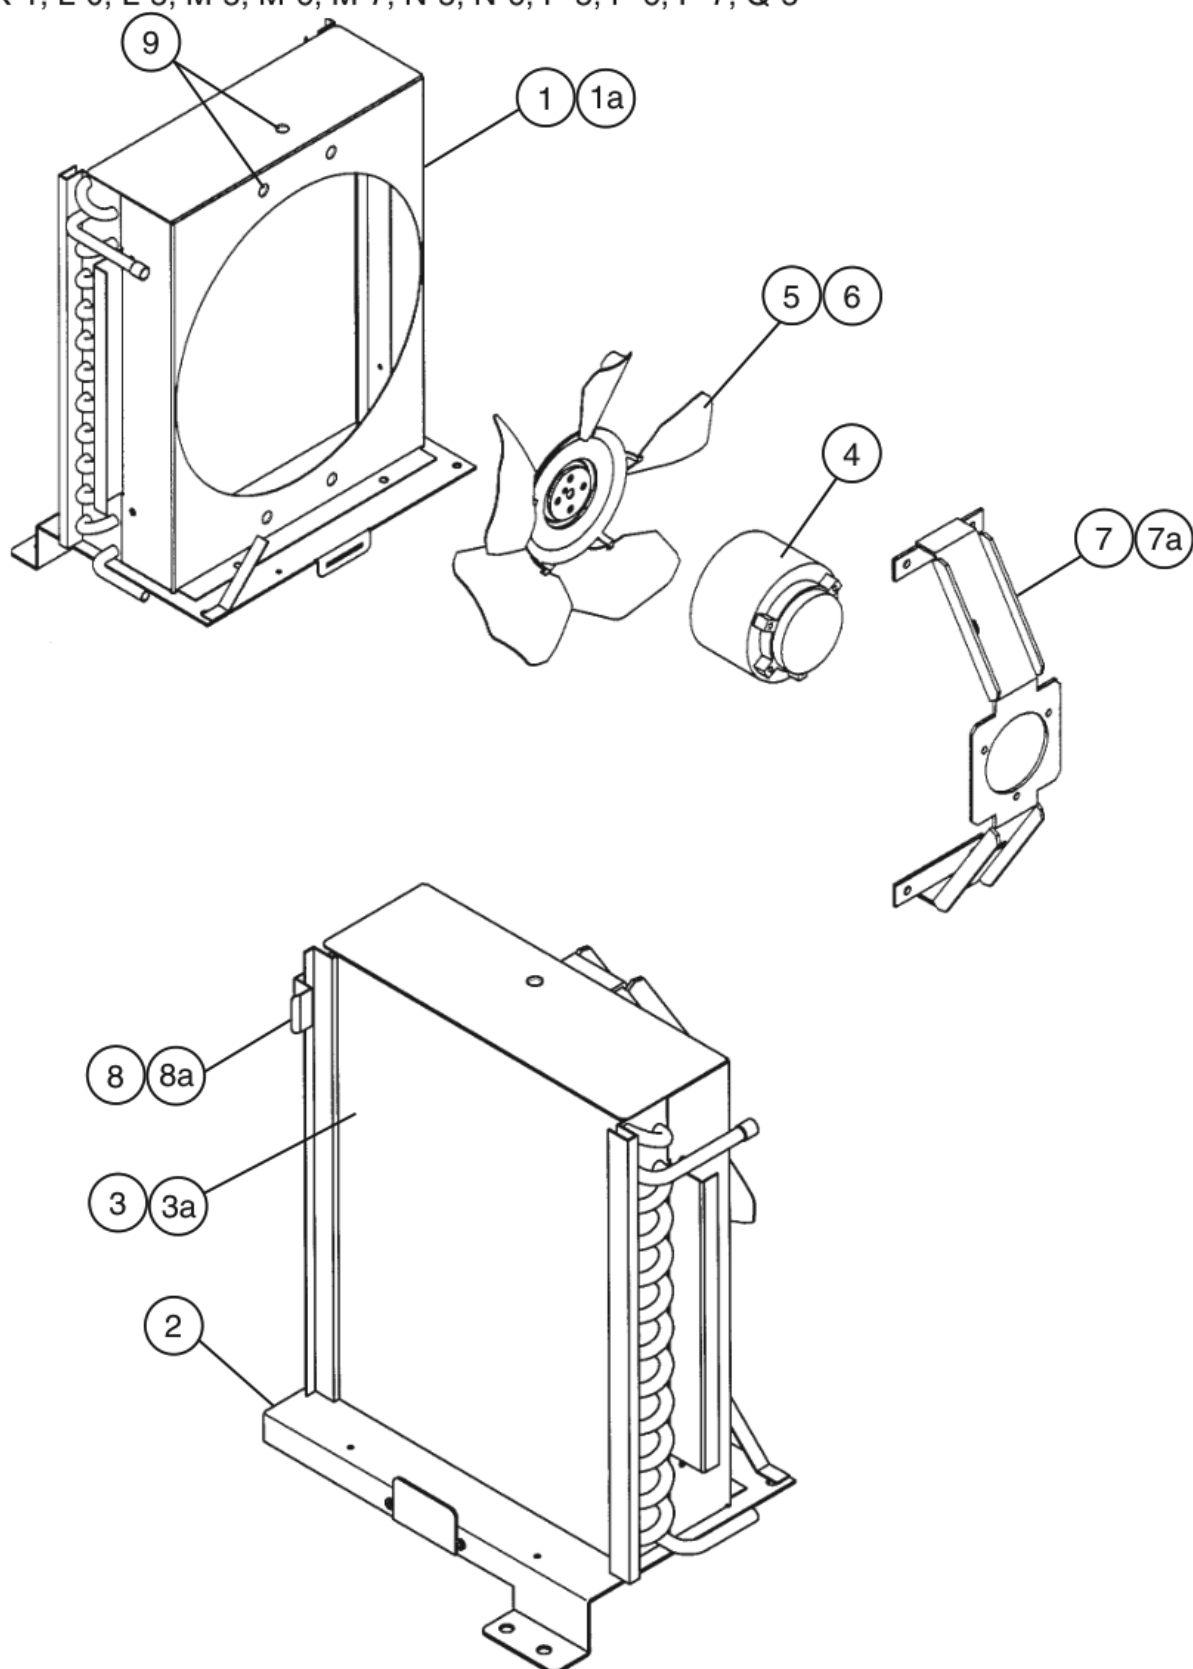

Title: H. Condenser Assembly Model: RH1-AAC(-HD)												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0 to N-5	N-6 to Q-5							
1	Shroud – Condenser	GS	2A1685-01	1	-							
			2A2722-01		1							
1a	T2 Screw	4x8, SS	7P32-0408	2	2							
2	Base – Condenser	GS	2A1027G01	1	-							
			2A2724G01		1							
3	Condenser	Heatcraft 2CZ1002N-12x9	2A0623-01	1	1							
3a	T2 Screw	4x8, SS	7P32-0408	4	4							
4	Motor-9W	-	4A0408-01	1	1							
5	Blade – Cond Fan	AIR DRIVE AD9CW30UBA	3A0436-01	1	1							
6	Hex Nut	PS	4A1345-01	1	1							
7	Bracket – Condenser Fan	GS	3A1564-01	1	1							
7a	Truss Head Screw	5x12	7C32-0512	4	4							
8	Retainer – Filter	GS	4A0790-01	1	1							
8a	T2 Screw	4x8, SS	7P32-0408	2	2							
9	Insert – Threaded	-	4A0407-01	5	5							

H. Condenser Assembly
RH2-AAC(-HD)

K-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

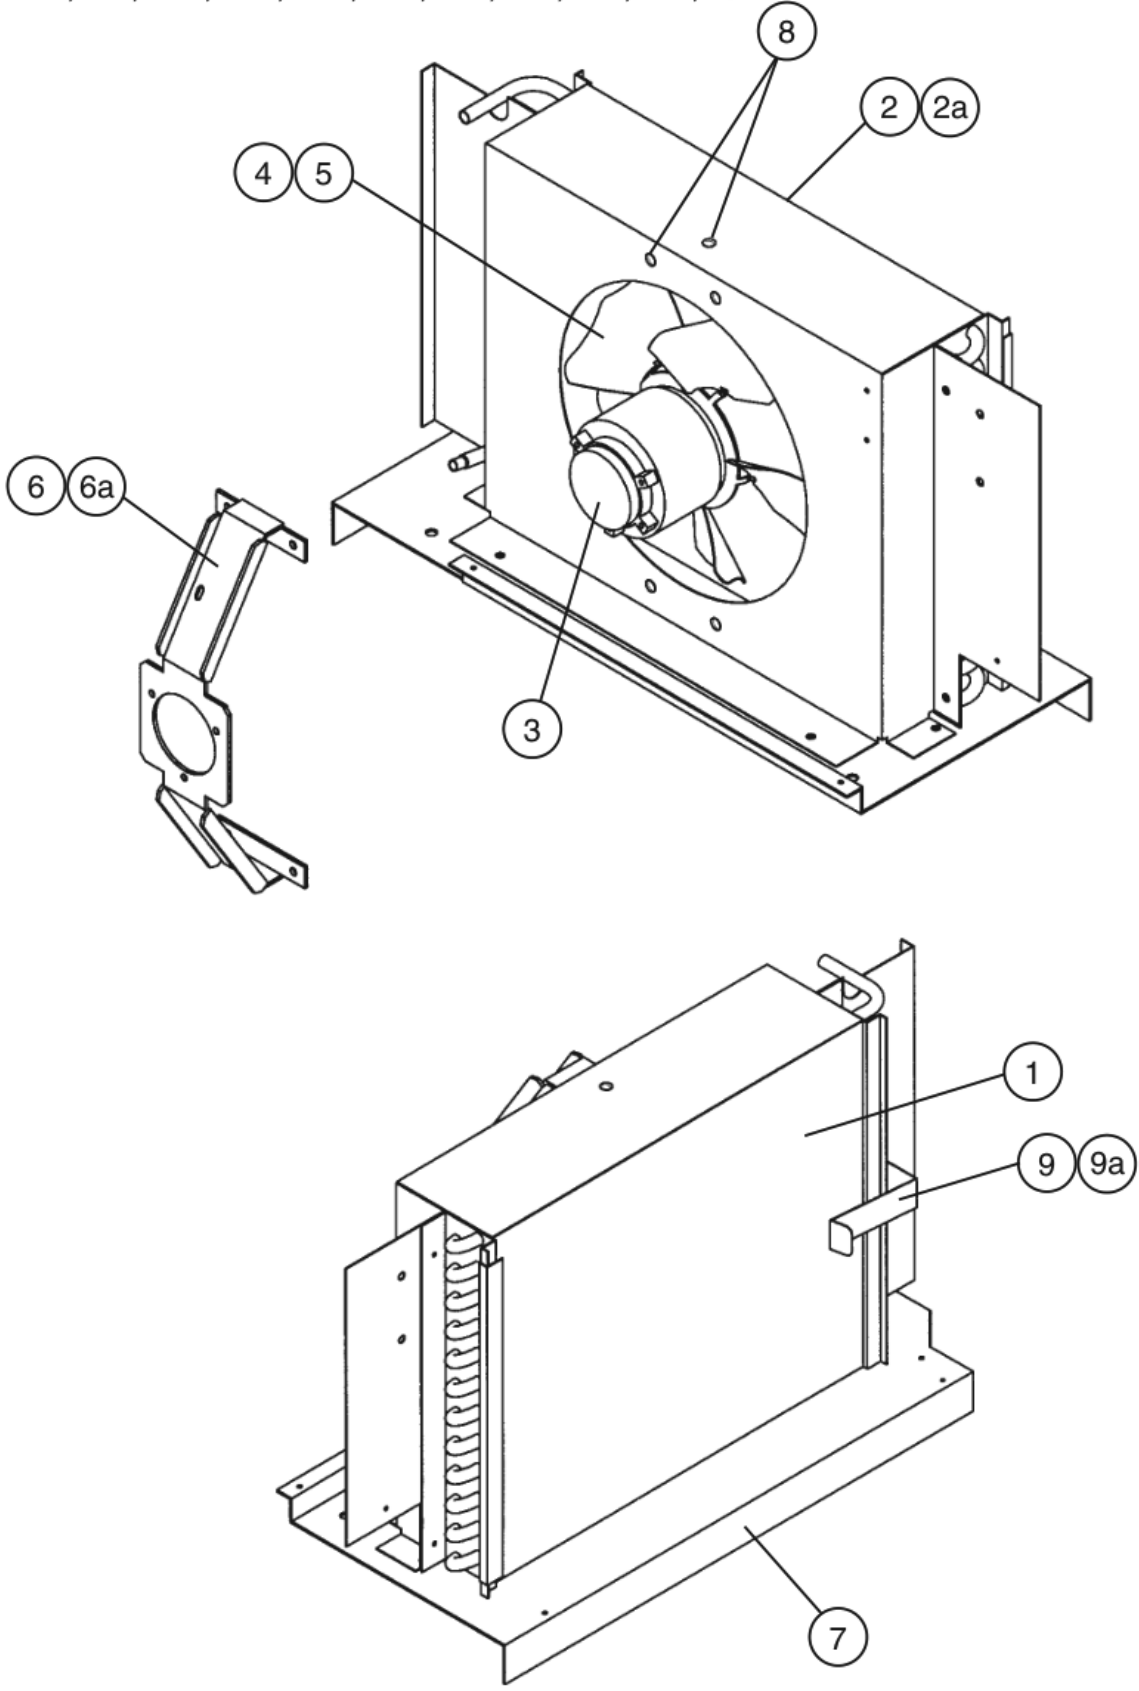


Title: H. Condenser Assembly Model: RH2-AAC(-HD)												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0 to Q-5								
1	Condenser	Heatcraft 3CZ1002C-12x15	2A0261-01	1								
2	Shroud – Condenser	GS	2A1686-01	1								
2a	T2 Screw	4x8, SS	7P32-0408	8								
3	Motor – Cond Fan	SPGE9HBE1	4A0408-01	1								
4	Blade – Fan Ref	Air Drive AD9CW30UBA38	3A0436-01	1								
5	Hex Nut	¼"-20 Zinc Plated	4A1345-01	1								
6	Bracket – Cond Fan	GS	3A1564-01	1								
6a	Truss Head Screw	5x12	7C32-0512	4								
7	Base – Condenser	GS	2A1217-01	1								
8	Insert – Threaded	-	4A0407-01	5								
9	Retainer – Filter	-	4A2138-01	1								
9a	T2 Screw	4x8, SS	7P32-0408	2								

H. Condenser Assembly

RH3-AAC(-HD)


K-0, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, Q-5

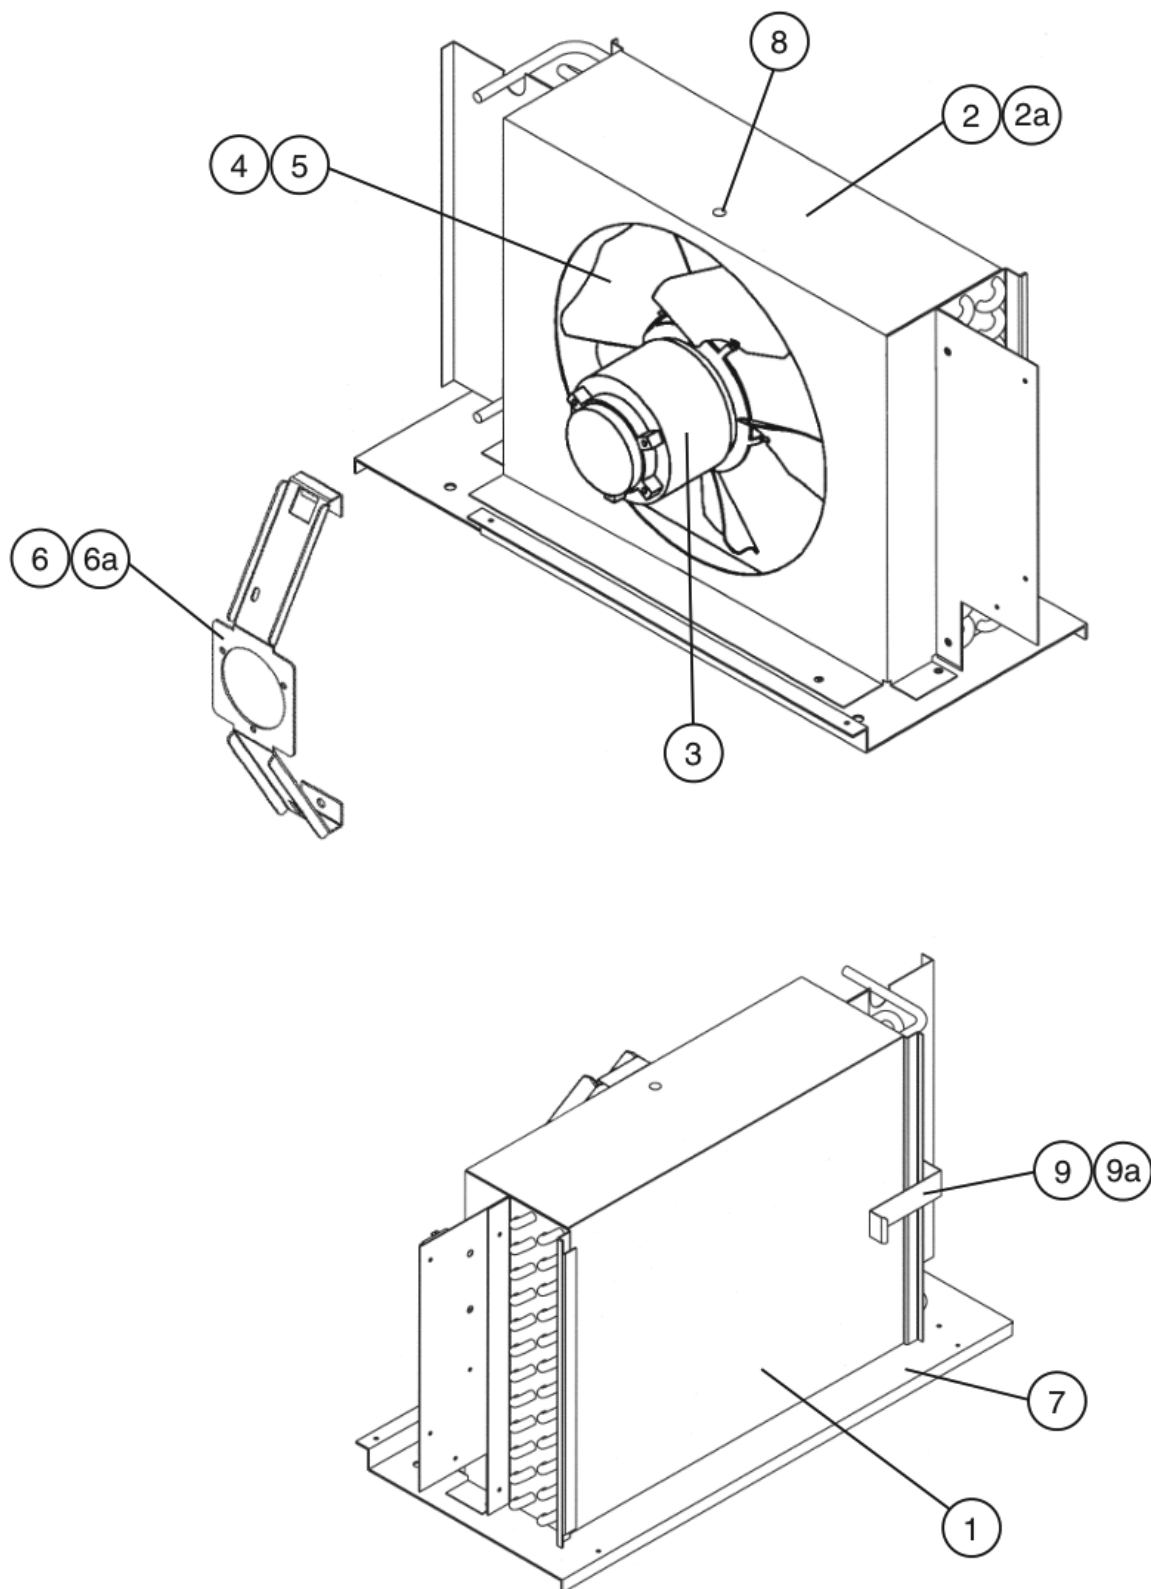

Title: H. Condenser Assembly Model: RH3-AAC(-HD)												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0 to Q-5								
1	Condenser	-	2A1166-01	1								
2	Shroud – Condenser	GS	2A1715-01	1								
2a	T2 Screw	4x6, SS	7P32-0406	8								
3	Motor – 16W	SPGE9HBE1	4A0815-01	1								
4	Blade – Fan (Puller)	-	3A0608-01	1								
5	Hex Nut	1/4"-20 ZINC PLATED	4A1345-01	1								
6	Bracket – Cond Fan	GS	3A1564-01	1								
6a	Truss Head Screw	5x12, SS	7C32-0512	4								
7	Base – Condenser	GS	2A1168-01	1								
8	Insert – Threaded	-	4A0407-01	5								
9	Retainer – Filter	-	4A2138-01	1								
9a	T2 Screw	4x8, SS	7P32-0408	2								

J. Body-Prefinal RH1-AAC(-HD)

K-0, K-1, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

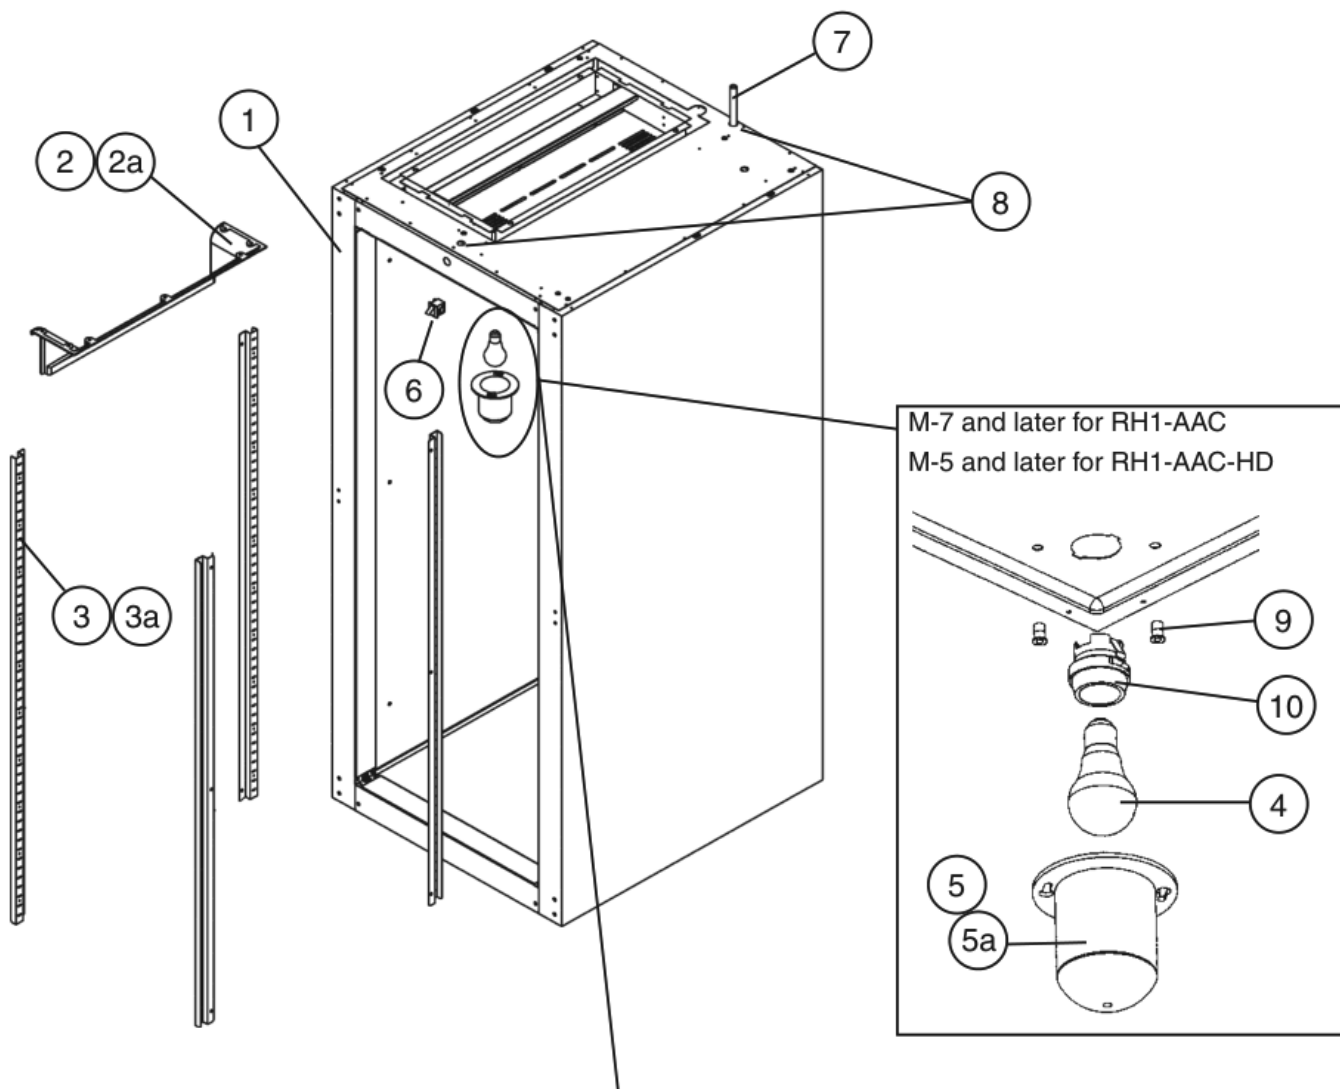


M-6 and earlier for RH1-AAC
L-5 and earlier for RH1-AAC-HD

The santoprene light socket was changed to a porcelain lampholder at M-7 for FH1-AAC and at M-5 for FH2-AAC-HD. This change is non-interchangeable. If the light socket is not operating on a unit with a santoprene light socket, Hoshizaki recommends replacement with HS-3554.

Note:

Parts 4, 5 and 5a are not included in HS-3554; they are shown for reference only.

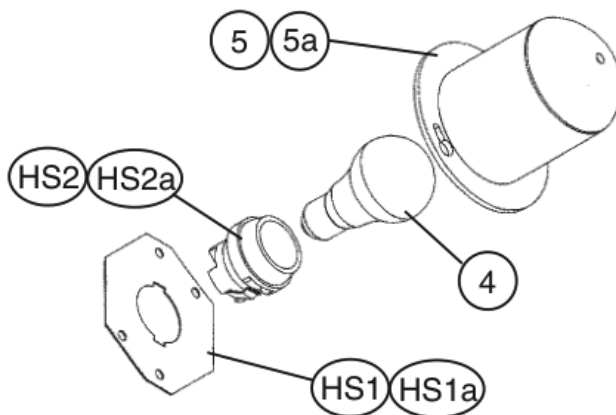


Title: J. Body-Prefinal Model: RH1-AAC(-HD)											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				K-0	K-1 to L-5	M-5 M-6	M-7 to N-7				
1	Cabinet Prefoam (1 Sec)	-	1A0173G03	1	1	1	1				
2	Distributor – Air Top Assm	ABS	2A0438G01	1	1	1	1				
2a	T2 Screw	4x8, SS, SS	7P32-0408	7	7	7	7				
3	Pilaster	AL	3A0145-21	4	4	4	4				
3a	Truss Head Screw	5x10, SS	7C32-0510	12	12	12	12				
4	Bulb – Light	GE, 40A15	4A0437-01	1	1	-					
			4A2420-01			1	1				
5	Shield – Light	STANDARD KEIL, 2778-1010-3000	4A0465-01	1	1	1	1				
5a	Cheese Head Screw	5x12, SS	7C52-0512	2	2	2	2				
5b	Washer	RH1-AAC 8, SS	7W22-0800	2	2	2	-				
		RH1-AAC-HD 8, SS		2	2	-					
6	Switch – Door	RH1-AAC NYLON	3A1386-01	1	-						
			3A1826-01		1	1	1				
		RH1-AAC-HD NYLON	3A1386-01	2	-						
			3A1826-01		2	2	2				
7	Vinyl Hose	L=1700	773013812	1	1	1	1				
8	Bushing	OCB-875	428394-04	2	2	2	2				
9	Threaded Insert (Wide)	RH1-AAC	4A0839-01				2				
		RH1-AAC-HD				2	2				
10	Lampholder	RH1-AAC	4A2862-01	Non-interchangeable part change. If light socket is not operating for these codes, Hoshizaki recommends replacement with HS-3554 (below).			1				
		RH1-AAC-HD					1	1			

HS-3554-Lampholder Conversion Kit											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				M-6 and earlier for RH1-AAC L-5 and earlier for RH1-AAC-HD							
HS1	Plate – Lampholder Mount	SS	4A2880-01	1							
HS1a	Cheese Head Screw	SS	7C52-0512	2							
HS2	Lampholder		4A2862-01	1							
HS2a	Terminal – Flag	DNFR18-250FIBK	8101-18FJ	2							

J. Body-Prefinal RH2-AAC(-HD)


K-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

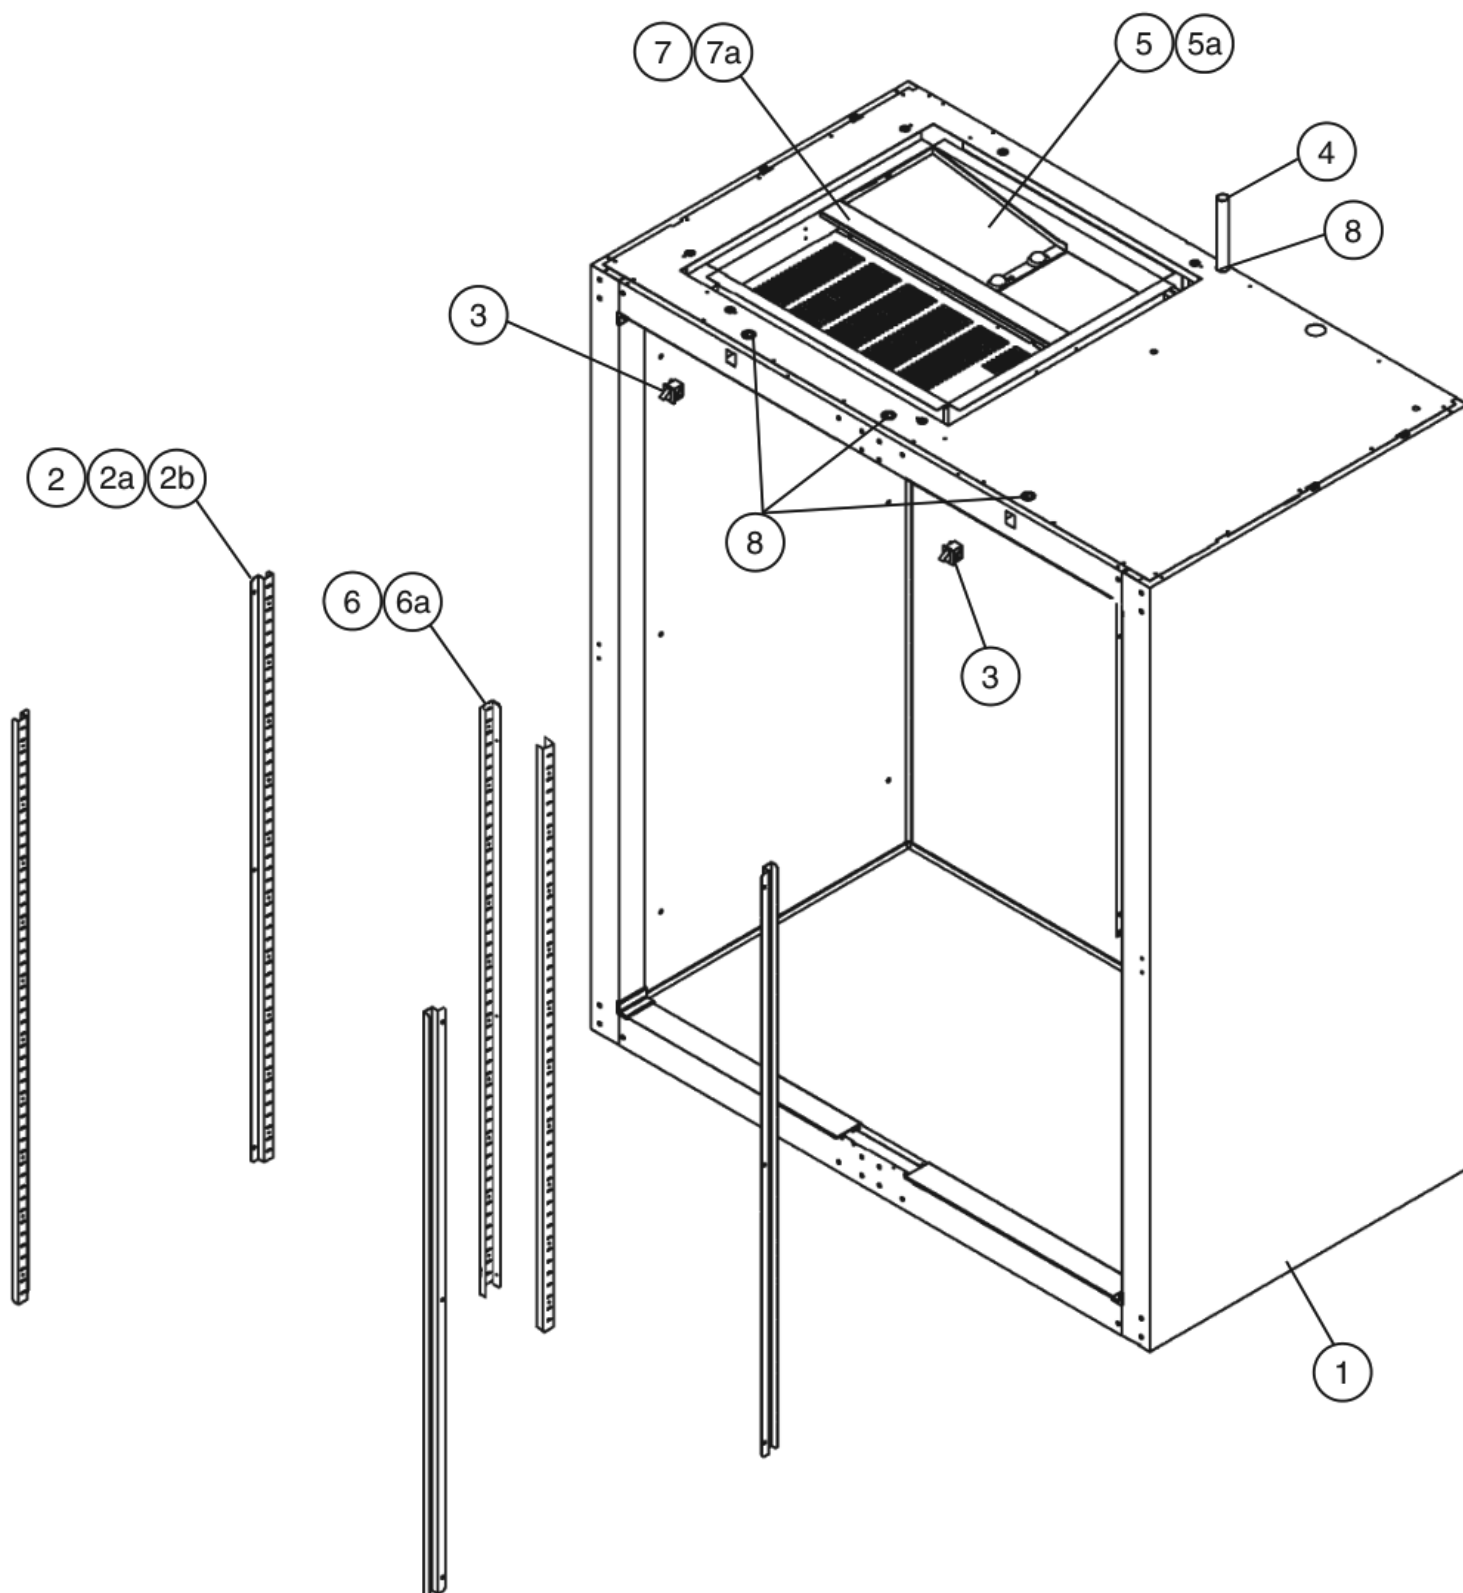

Title: J. Body-Prefinal Model: RH2-AAC(-HD)												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0	L-5 to P-6	P-7 Q-5						
1	Cabinet – Prefoam	RH2-AAC	2A0706G04	1	1	1						
		RH2-AAC-HD	2A1346G02	1	1	1						
2	Pilaster	AL	3A0145-21	4	4	4						
2a	Truss Head Screw	5x10, SS	7C32-0510	12	12	12						
2b	Threaded Insert	M5	4A0407-01	12	12	12						
3	Switch – Door	RH2-AAC NYLON	3A1386-01	2	-							
			3A1826-01		2	2						
		RH2-AAC-HD NYLON	3A1386-01	4	-							
			3A1826-01		4	4						
4	Vinyl Hose	L=1700	7730I3812	1	1	1						
5	Baffle – Air	-	2A0625-01	1	1	1						
5a	Truss Head Screw	5x10, SS	7C32-0510	2	2	2						
6	Pilaster – Mullion	AL	2A0205-21	2	2	-						
			2A3246-21			2						
6a	Truss Head Screw	5x10, SS	7C32-0510	6	6	6						
7	Divider – Air	-	2A0199-21	1	1	1						
7a	T2 Screw	4x8, SS	7P32-0408	4	4	4						
8	Bushing	OCB-875	428394-04	4	4	4						

J. Body-Prefinal
RH3-AAC(-HD)

K-0, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, Q-5

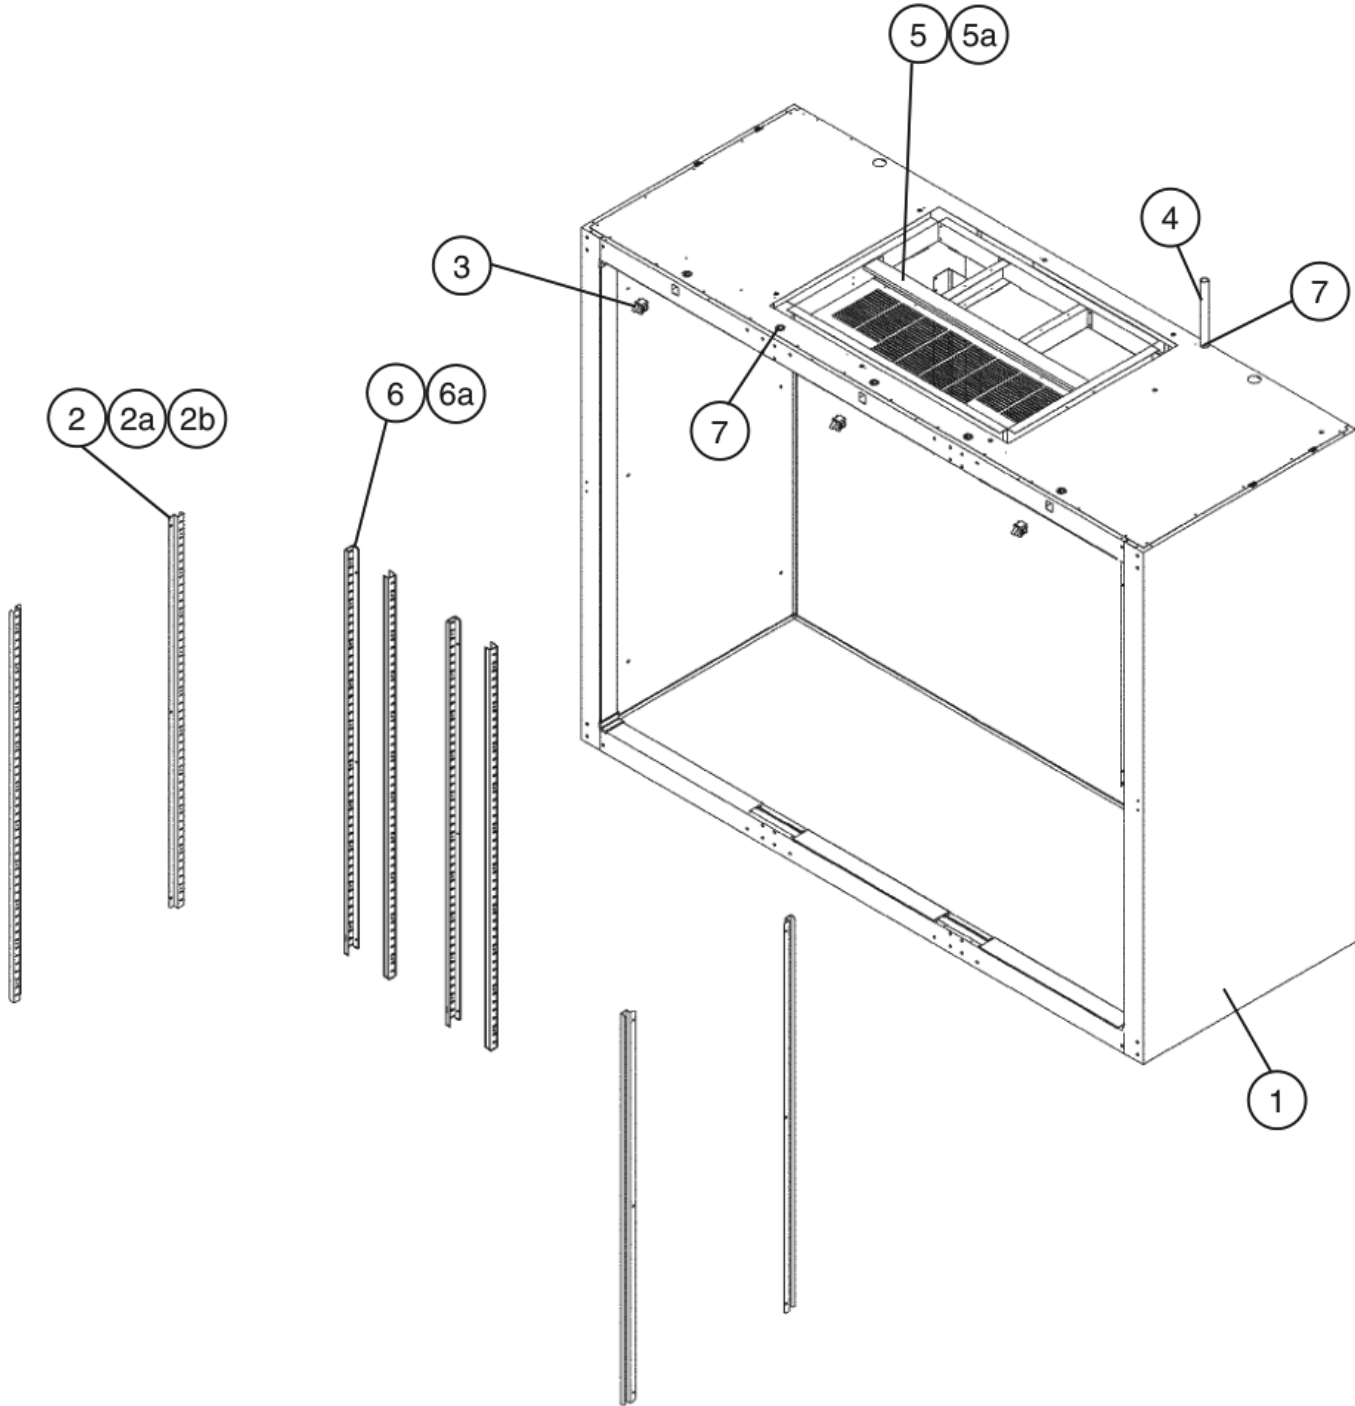


Title: J. Body-Prefinal Model: RH3-AAC(-HD)												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0 to P-5	Q-5							
1	Cabinet – Prefoam	RH3-AAC	2A1018G03	1	1							
		RH3-AAC-HD	2A1398G02	1	1							
2	Pilaster	AL	3A0145-21	4	4							
2a	Truss Head Screw	5×10, SS, SS	7C32-0510	12	12							
2b	Threaded Inserts	M5	4A0407-01	12	12							
3	Switch – Door	RH3-AAC NYLON	3A1826-01	3	3							
		RH3-AAC-HD NYLON		6	6							
4	Vinyl Hose	L=1700	7730I3812	1	1							
5	Divider – Air	-	2A1101-21	1	1							
5a	T2 Screw	4×8, SS, SS	7P32-0408	4	4							
6	Pilaster – Mullion	AL	2A0205-21	4	-							
			2A3246-21		4							
6a	Truss Head Screw	5×10, SS	7C32-0510	12	12							
7	Bushing	OCB-875	428394-04	6	6							

K. Door-Right

RH1-AAC, RH2-AAC, RH3-AAC

K-0, K-1, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

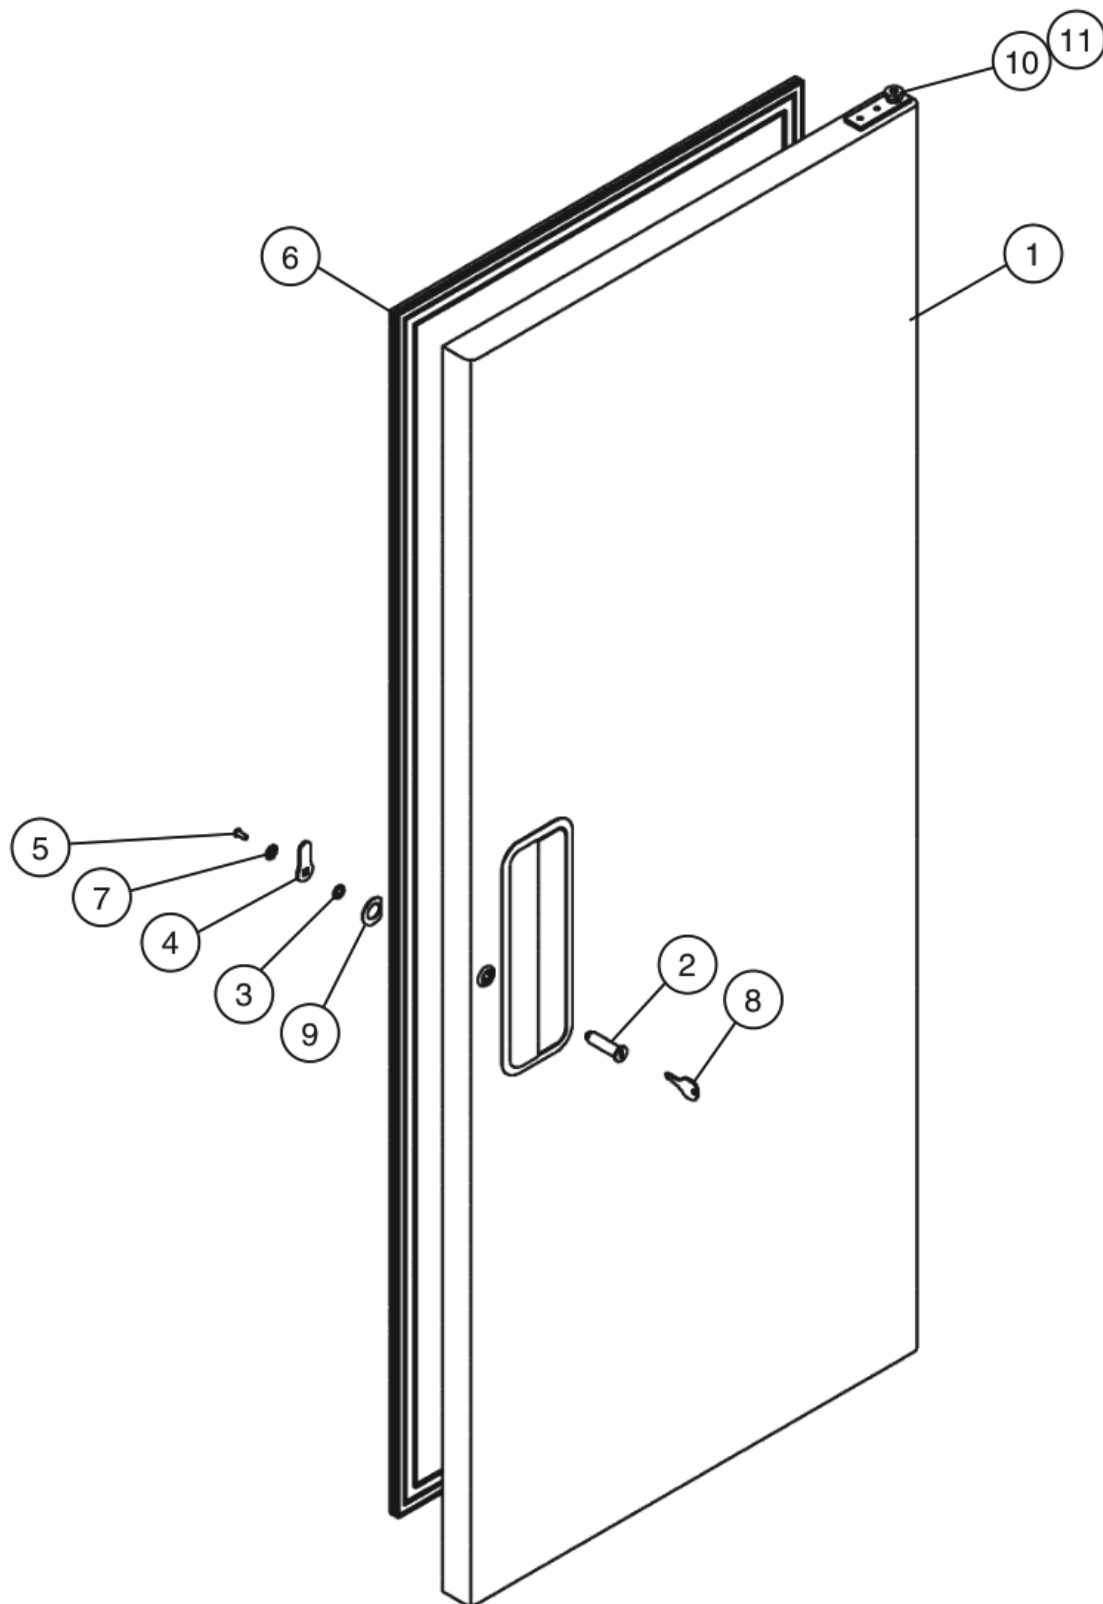


Title: K. Door-Right Model: RH1-AAC, RH2-AAC, RH3-AAC												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0	K-1 to Q-5							
1	Door – Prefoam (R)	-	1A0317G01	1	-							
			1A0317G03		1							
2	Lock – Tumbler	M4-5813-001	4A0462-01	1	1							
3	Lock – Stop Washer	M5-8060-103	4A0458-01	1	1							
4	Cam – Door Lock	P.S	4A0228-01	1	1							
5	Lock – Screw	SS	4A0461-01	1	1							
6	Gasket – Door	JARROW #P-2209 244A GRAY	3A0273-01	1	1							
7	Lock Washer	SS	4A0459-01	1	1							
8	Lock – Key	M5-0680-111	4A0460-01	1	1							
9	Washer – Door Lock	SS	4A0670-01	1	1							
10	Hinge – Spring	-	4A3312-01	1	1							
11	Hinge – Spring Cart		4A0438-01	1	1							

L. Door-Left

RH2-AAC, RH3-AAC

K-0, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

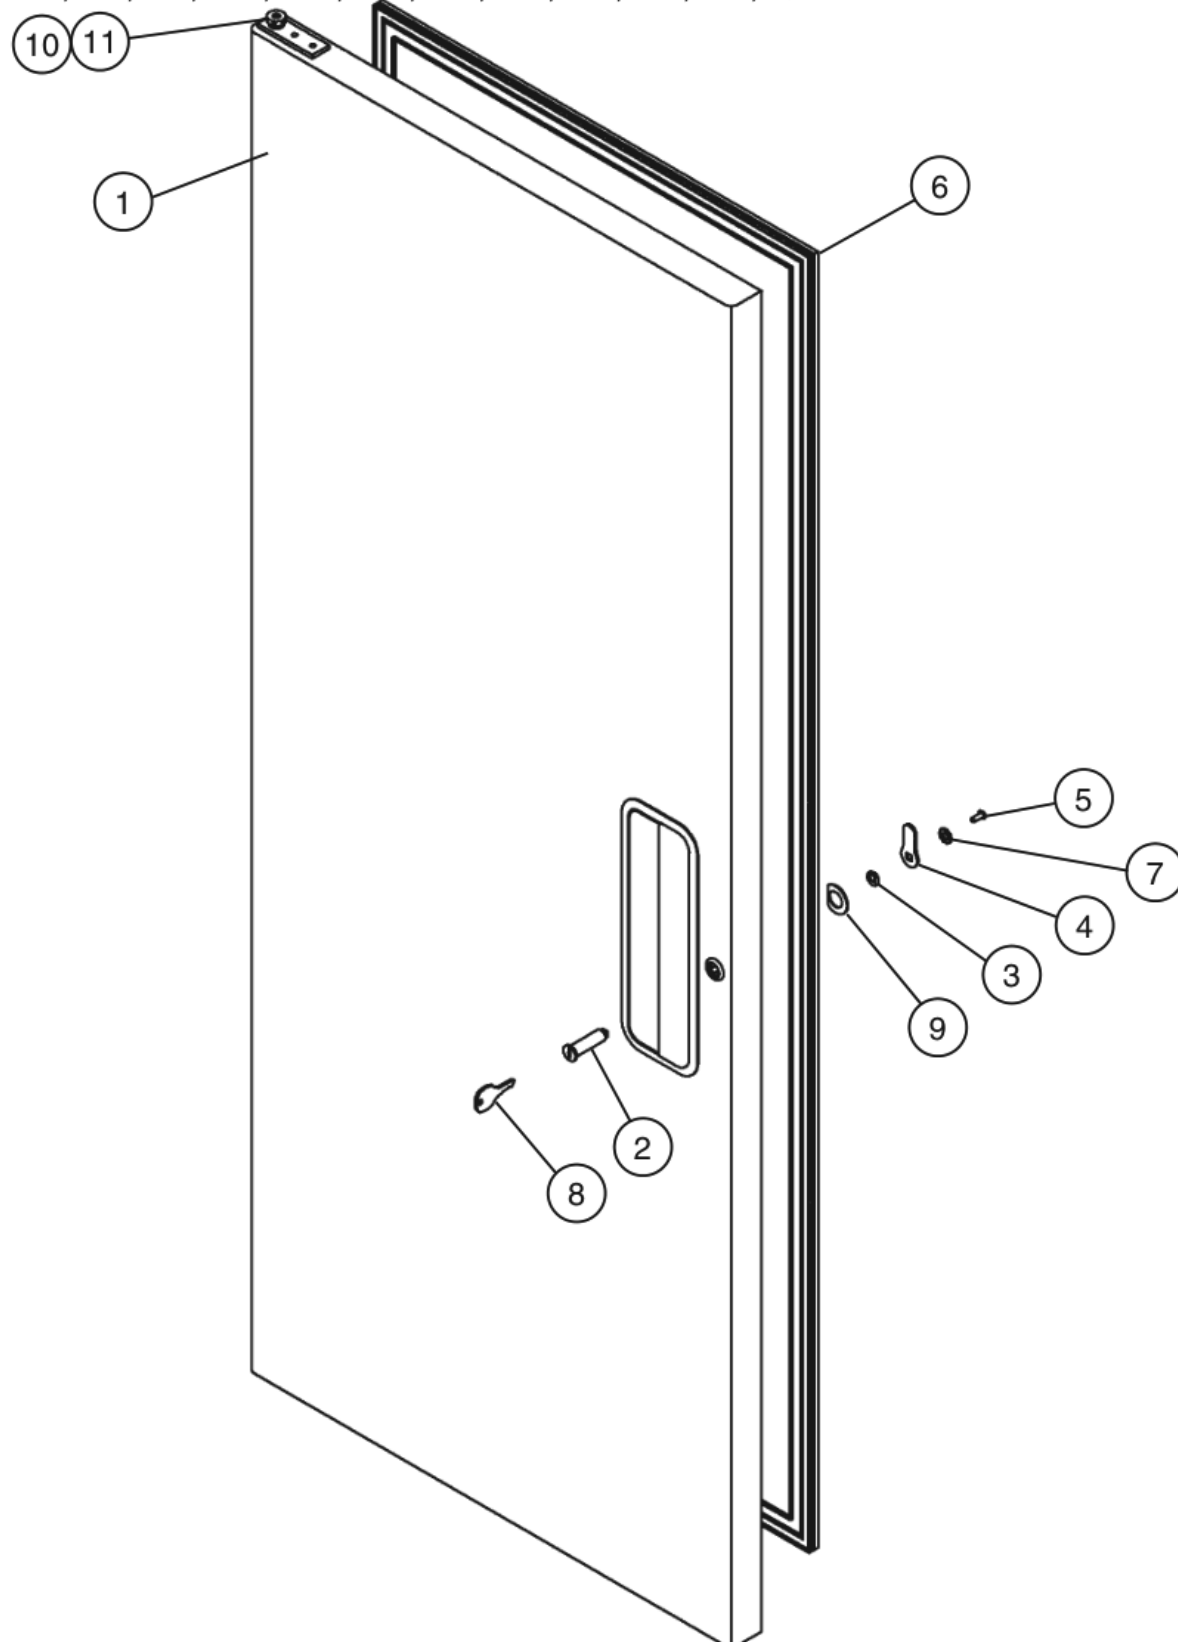


Title: **L. Door-Left** Model: **RH2-AAC, RH3-AAC**

Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0	L-0 to Q-5							
1	Door – Prefoam (L)	-	1A0317G02	1	-							
			1A0317G04		1							
2	Lock – Tumbler	M4-5813-001	4A0462-01	1	1							
3	Lock – Stop Washer	M5-8060-103	4A0458-01	1	1							
4	Cam – Door Lock	P.S	4A0228-01	1	1							
5	Lock – Screw	SS	4A0461-01	1	1							
6	Gasket – Door	JARROW #P-2209 244A GRAY	3A0273-01	1	1							
7	Lock Washer	SS	4A0459-01	1	1							
8	Lock – Key	M5-0680-111	4A0460-01	1	1							
9	Washer – Door Lock	SS	4A0670-01	1	1							
10	Hinge – Spring		4A3312-02	1	1							
11	Hinge – Spring Cart		4A0438-02	1	1							

M. Door-Half (UR)


RH1-AAC-HD, RH2-AAC-HD, RH3-AAC-HD

K-0, K-1, L-0, L-5, M-5, N-5, N-6, P-5, P-6, Q-5

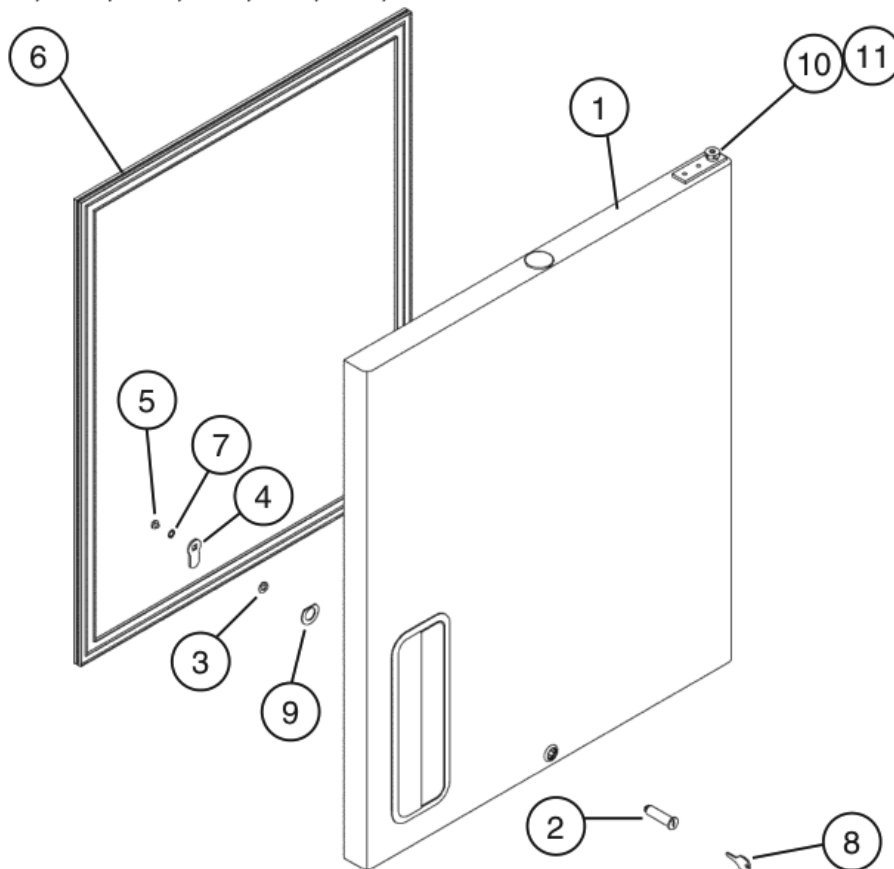


Title: M. Door-Half (UR) Model: RH1-AAC-HD, RH2-AAC-HD, RH3-AAC-HD										
Index No.	Description	Material or Model Number	Part Number	Required Number						
				K-0	K-1 to Q-5					
1	Door – Prefoam (UR)	-	1A0325G01	1	-					
			1A0325G03		1					
2	Lock – Tumbler	M4-5813-001	4A0462-01	1	1					
3	Lock – Stop Washer	M5-8060-103	4A0458-01	1	1					
4	Cam – Door Lock	P.S	4A0228-01	1	1					
5	Lock – Screw	SS	4A0461-01	1	1					
6	Gasket – Door (Half)	JARROW #P-2209 244A GRAY	3A0273-02	1	1					
7	Lock Washer	SS	4A0459-01	1	1					
8	Lock – Key	M5-0680-111	4A0460-01	1	1					
9	Washer – Door Lock	SS	4A0670-01	1	1					
10	Hinge – Spring		4A3312-01	1	1					
11	Hinge – Spring Cart		4A0438-01	1	1					

N. Door-Half (LR)
RH1-AAC-HD, RH2-AAC-HD, RH3-AAC-HD
 K-0, K-1, L-0, L-5, M-5, N-5, N-6, P-5, P-6, Q-5

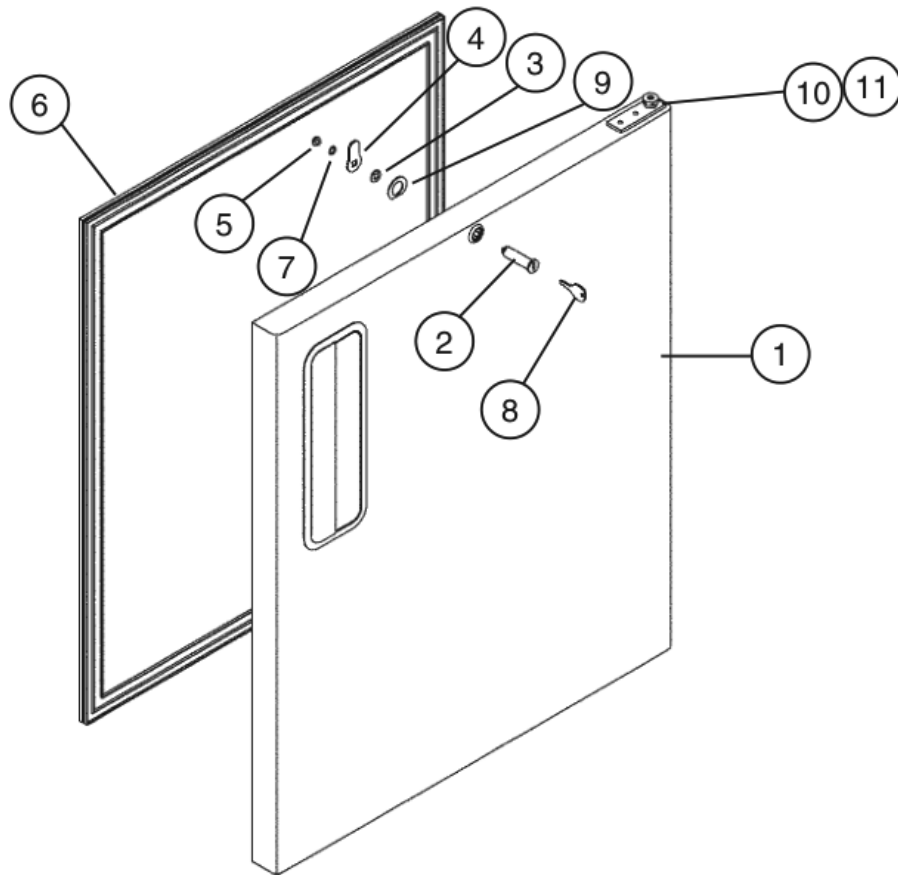


Title: N. Door-Half (LR) Model: RH1-AAC-HD, RH2-AAC-HD, RH3-AAC-HD											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				K-0 K-1	L-0	L-5 to N-5	N-6 to Q-5				
1	Door – Prefoam (LR)	-	1A0323G01	1	-						
			1A0323G03		1	1	1				
2	Lock – Tumbler	M4-5813-001	4A0462-01	1	1	1	1				
3	Lock – Stop Washer	M5-8060-103	4A0458-01	1	1	1	1				
4	Cam – Door Lock	P.S	4A0228-01	1	1	1	1				
5	Lock – Screw	SS	4A0461-01	1	1	1	1				
6	Gasket – Door (Half)	JARROW #P-2209 244A GRAY	3A0273-02								
7	Lock Washer	SS	4A0459-01	1	1	1	1				
8	Lock – Key	M5-0680-111	4A0460-01	1	1	1	1				
9	Washer – Door Lock	SS	4A0670-01	1	1	1	1				
10	Hinge – Spring		4A3312-01	1	1	1	1				
11	Hinge – Spring Cart		4A0438-01	1	1	1	1				

P. Door-Half (UL)
RH2-AAC-HD, RH3-AAC-HD
 K-0, L-5, N-5, N-6, P-5, P-6, Q-5

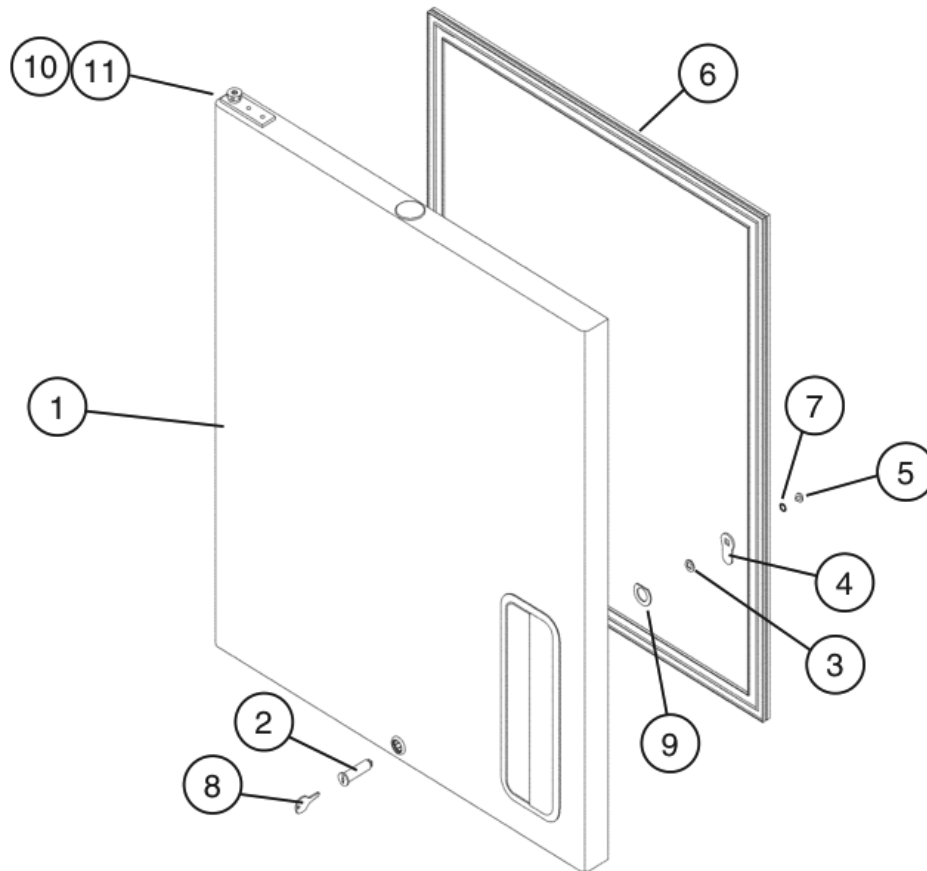

Title: P. Door-Half (UL) Model: RH2-AAC-HD, RH3-AAC-HD										
Index No.	Description	Material or Model Number	Part Number	Required Number						
				K-0	L-5 to Q-5					
1	Door – Prefoam (UL)	-	1A0323G02	1	-					
			1A0323G04		1					
2	Lock – Tumbler	M4-5813-001	4A0462-01	1	1					
3	Lock – Stop Washer	M5-8060-103	4A0458-01	1	1					
4	Cam – Door Lock	P.S	4A0228-01	1	1					
5	Lock – Screw	SS	4A0461-01	1	1					
6	Gasket – Door (Half)	JARROW #P-2209 244A GRAY	3A0273-02	1	1					
7	Lock Washer	SS	4A0459-01	1	1					
8	Lock – Key	M5-0680-111	4A0460-01	1	1					
9	Washer – Door Lock	SS	4A0670-01	1	1					
10	Hinge – Spring		4A3312-02	1	1					
11	Hinge – Spring Cart		4A0438-02	1	1					


Q. Door-Half (LL)
RH2-AAC-HD, RH3-AAC-HD
 K-0, L-5, N-5, N-6, P-5, P-6, Q-5

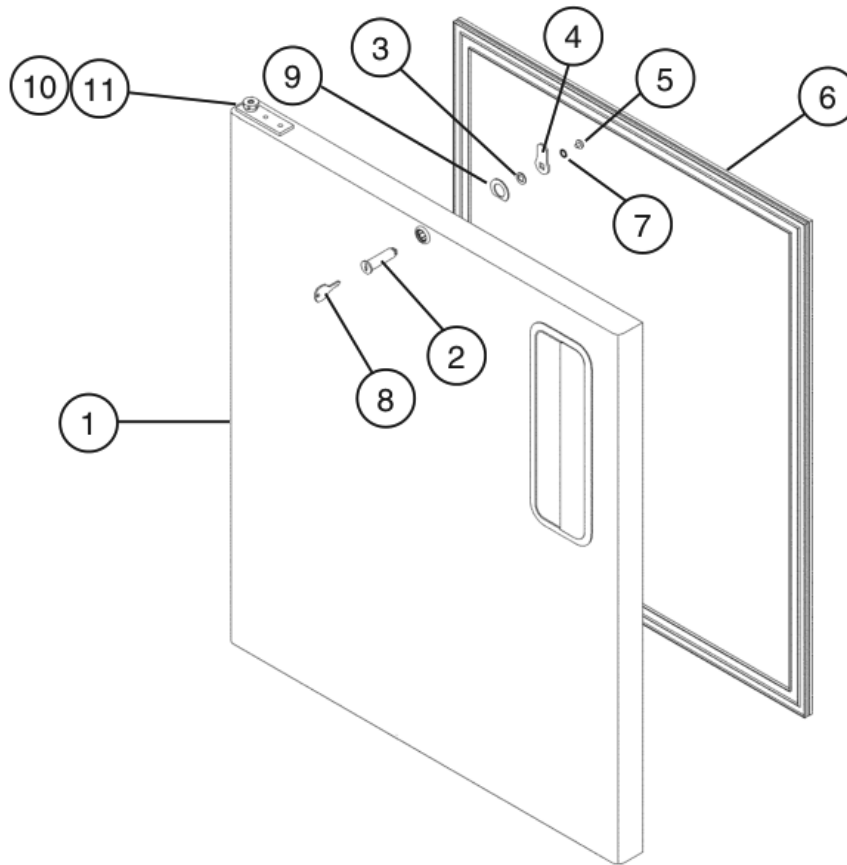

Title: Q. Door-Half (LL) Model: RH2-AAC-HD, RH3-AAC-HD										
Index No.	Description	Material or Model Number	Part Number	Required Number						
				K-0	L-5 to Q-5					
1	Door – Prefoam (LL)	-	1A0325G02	1	-					
			1A0325G04		1					
2	Lock – Tumbler	M4-5813-001	4A0462-01	1	1					
3	Lock – Stop Washer	M5-8060-103	4A0458-01	1	1					
4	Cam – Door Lock	P.S	4A0228-01	1	1					
5	Lock – Screw	SS	4A0461-01	1	1					
6	Gasket – Door (Half)	JARROW #P-2209 244A GRAY	3A0273-02	1	1					
7	Lock Washer	SS	4A0459-01	1	1					
8	Lock – Key	M5-0680-111	4A0460-01	1	1					
9	Washer – Door Lock	SS	4A0670-01	1	1					
10	Hinge – Spring	-	4A3312-02	1	1					
11	Hinge – Spring Cart		4A0438-02	1	1					

R. Mullion-Horizontal RH1-AAC-HD


K-0, K-1, L-0, L-5, M-5, N-6, P-5, P-6, Q-5

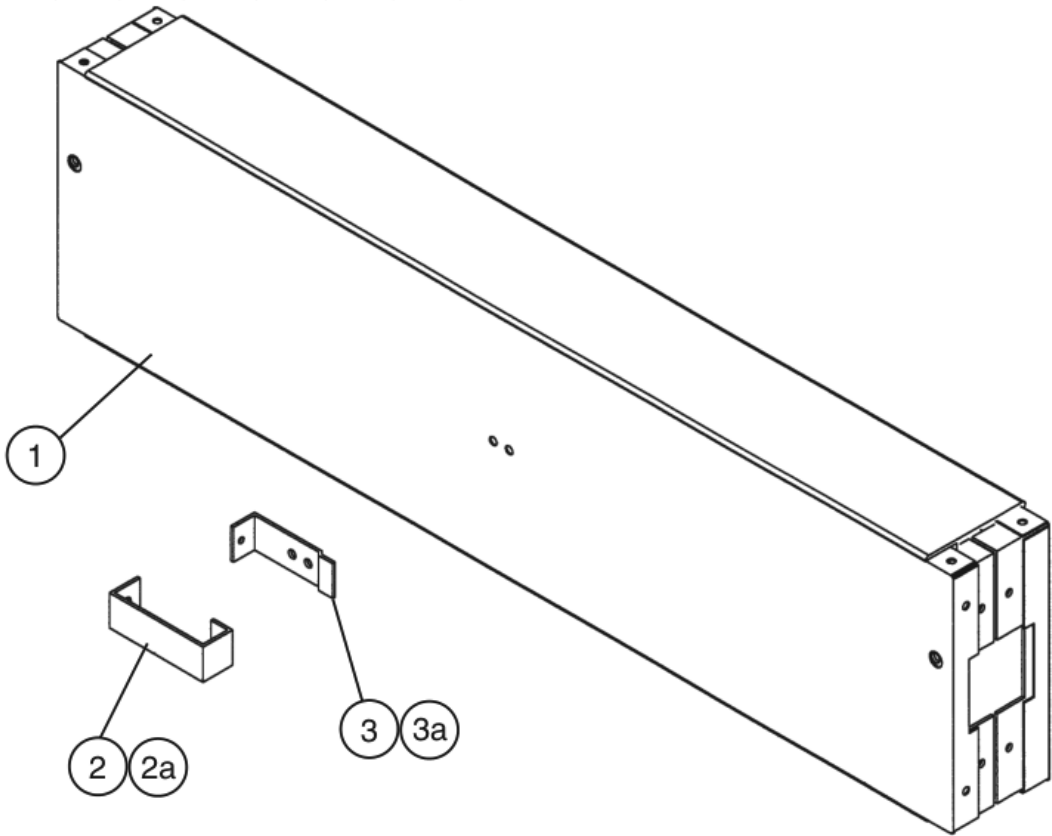

Title: R. Mullion-Horizontal Model: RH1-AAC-HD												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0 to Q-5								
1	Mullion – Prefoam (H)	-	2A1313G02	1								
2	Plate – Strike (Front)	SS	4A0355-01	1								
2a	Truss Head Screw	4x8, SS	7C32-0408	1								
3	Plate – Strike (Base)	SS	4A0354-01	1								
3a	T2 Screw	4x8, SS	7P32-0408	2								

S. Mullion-Vertical RH2-AAC, RH3-AAC

K-0, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

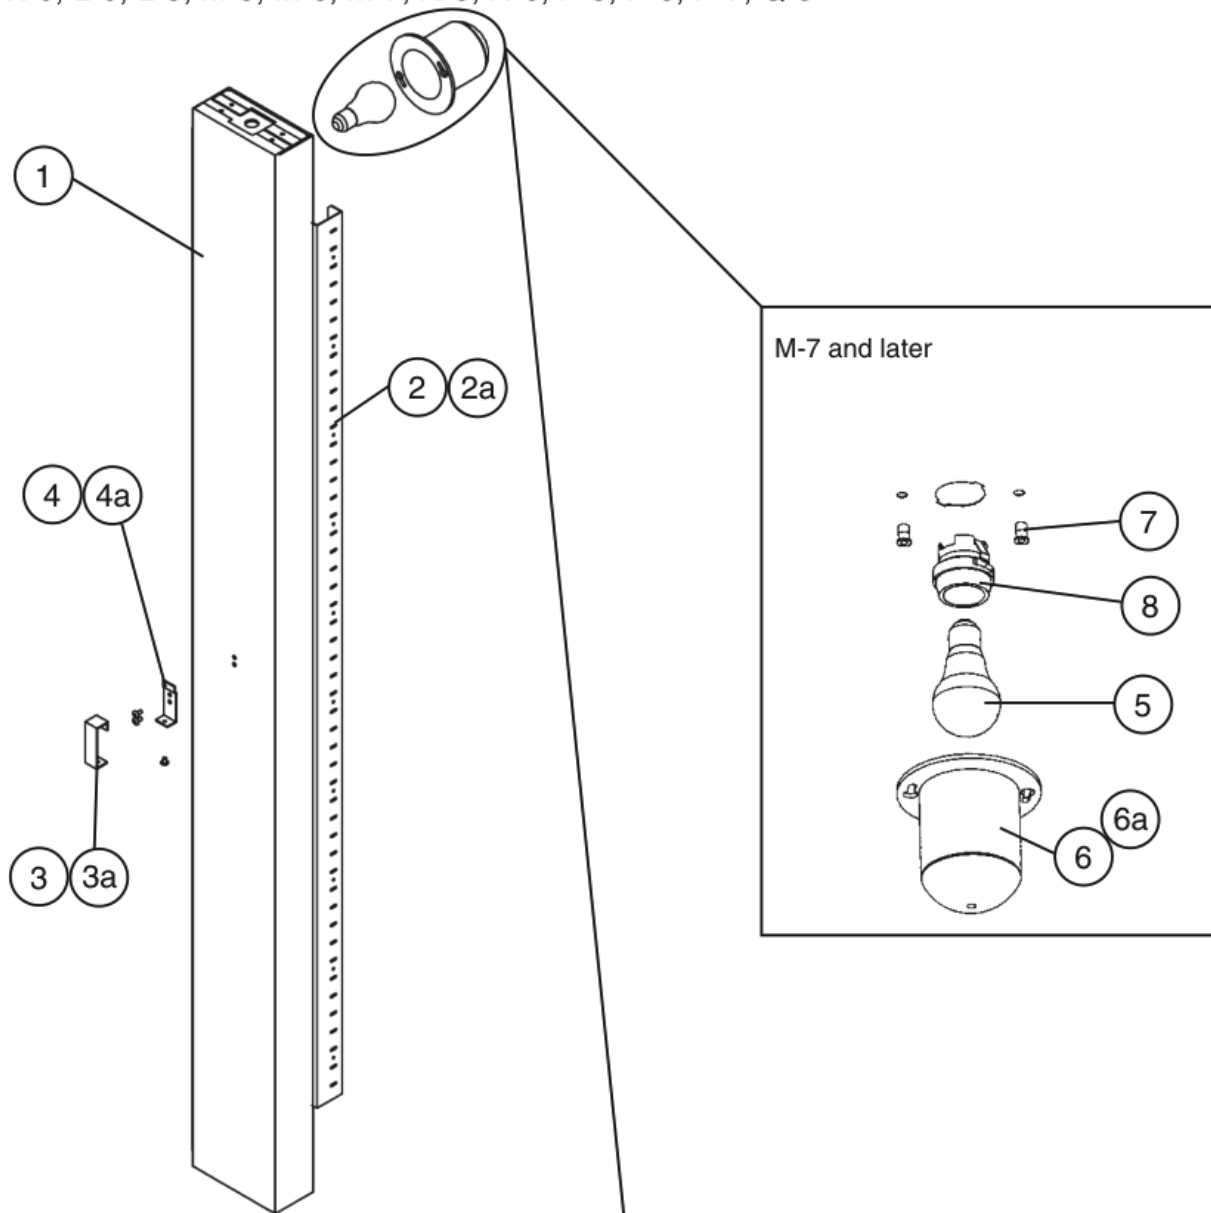


M-6 and earlier

The santoprene light socket was changed to a porcelain lampholder at M-7. This change is non-interchangeable. If the light socket is not operating on a unit with a santoprene light socket, Hoshizaki recommends replacement with HS-3554.

Note:

Parts 5, 6 and 6a are not included in HS-3554; they are shown for reference only.

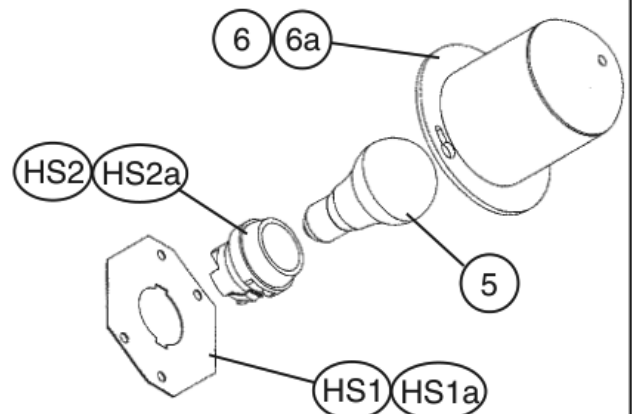


Title: S. Mullion-Vertical Model: RH2-AAC, RH3-AAC											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				K-0 to L-5	M-5 M-6	M-7 to P-6	P-7 Q-5				
1	Mullion – Prefoam	-	2A1288G03	1	1	1					
2	Pilaster – Mullion	AL	2A0205-21	2	2	2	-				
			2A3246-21				2				
2a	Truss Head Screw	5x10, SS	7C32-0510	6	6	6	6				
3	Plate – Strike (Front)	SS	4A0355-01	1	1	1	1				
3a	Truss Head Screw	4x8, SS	7C32-0408	1	1	1	1				
4	Plate – Strike (Base)	SS	4A0354-01	1	1	1	1				
4a	T2 Screw	4x8, SS	7P32-0408	2	2	2	2				
5	Bulb – Light	GE, 40A15	4A0437-01	1	-						
		-	4A2420-01		1	1	1				
6	Shield – Light	2778-1010-3000	4A0465-01	1	1	1	1				
6a	Cheese Head Screw	5x12, SS	7C52-0512	2	2	2	2				
6b	Washer	8, SS	7W22-0800	2	2	-					
7	Threaded Insert (Wide)		4A0839-01	Non-interchangeable part change. If light socket is not operating for these codes, Hoshizaki recommends replacement with HS-3554 (below).		2	2				
8	Lampholder	-	4A2862-01			1	1				

HS-3554-Lampholder Conversion Kit											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				M-6 and earlier							
HS1	Plate – Lampholder Mount	SS	4A2880-01	1							
HS1a	Cheese Head Screw	SS	7C52-0512	2							
HS2	Lampholder		4A2862-01	1							
HS2a	Terminal – Flag	DNFR18-250FIBK	8101-18FJ	2							

T. Mullion-Cross
RH2-AAC-HD, RH3-AAC-HD
 K-0, L-5, N-5, N-6, P-5, P-6, Q-5

T. Mullion-Cross
RH2-AAC-HD, RH3-AAC-HD
 K-0, L-5, N-5, N-6, P-5, P-6, Q-5

T. Mullion-Cross
RH2-AAC-HD, RH3-AAC-HD
 K-0, L-5, N-5, N-6, P-5, P-6, Q-5

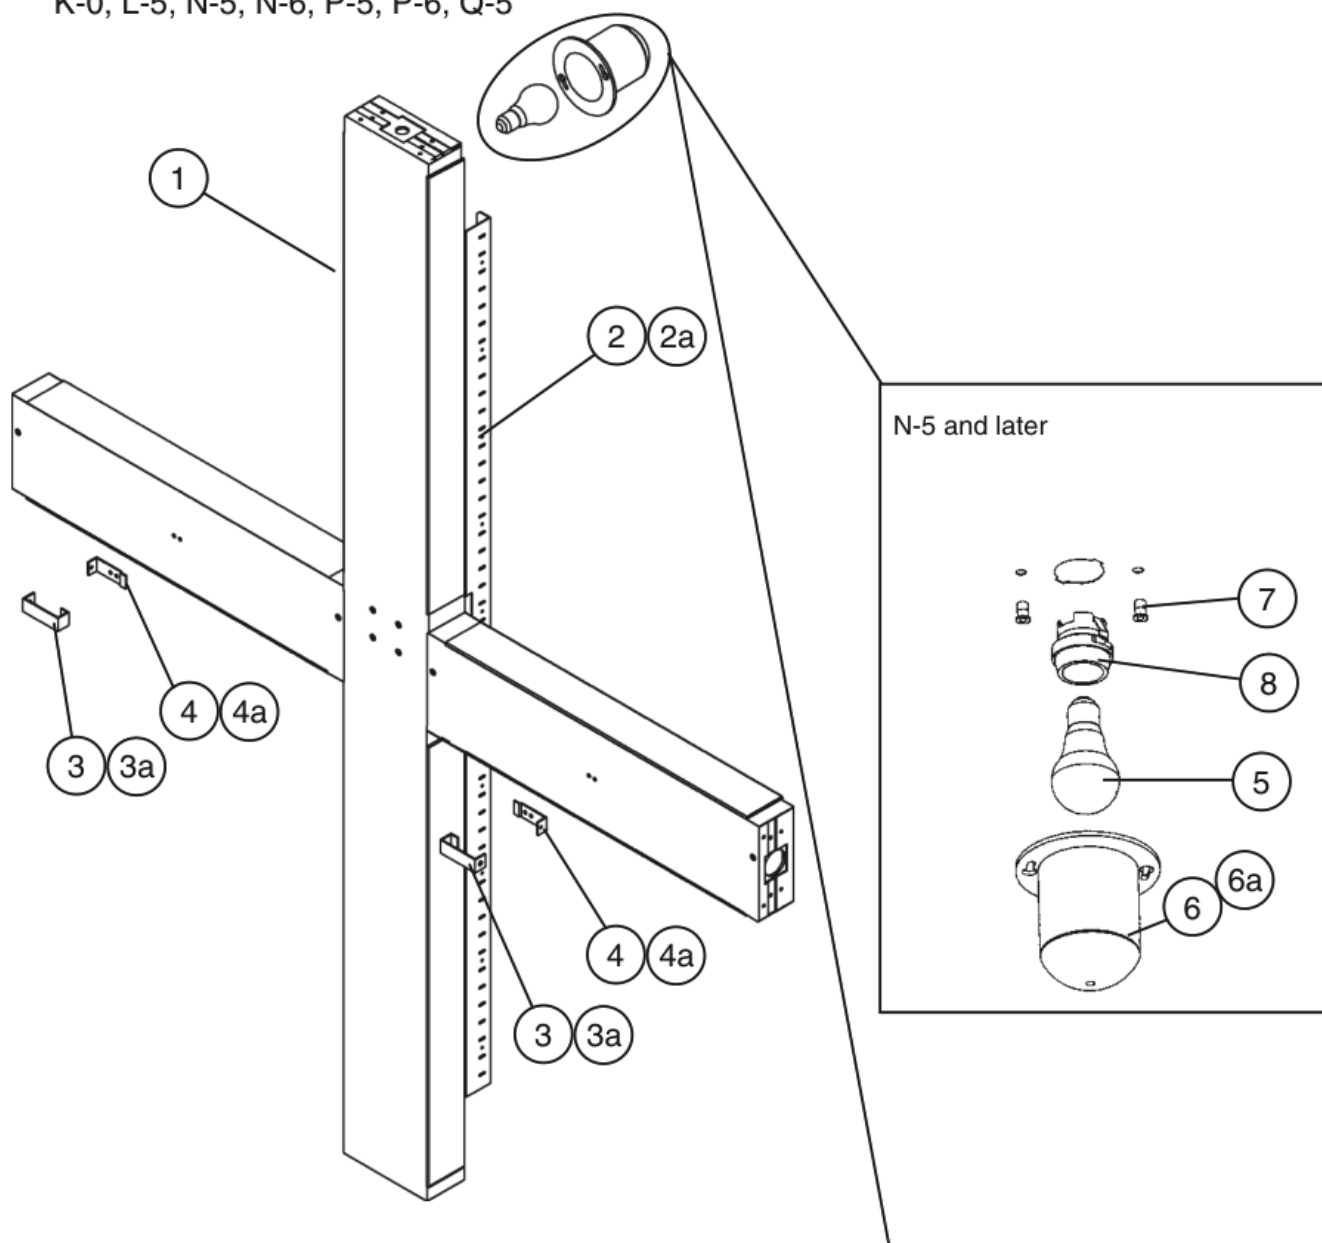


L-5 and earlier

The santoprene light socket was changed to a porcelain lampholder at N-5. This change is non-interchangeable. If the light socket is not operating on a unit with a santoprene light socket, Hoshizaki recommends replacement with HS-3554.

Note:


Parts 5, 6 and 6a are not included in HS-3554; they are shown for reference only.

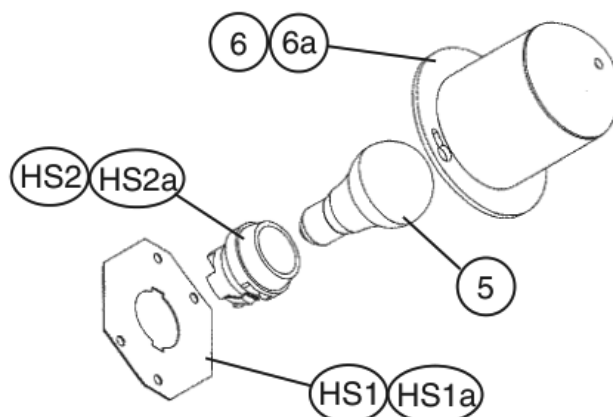

Title: T. Mullion-Cross Model: RH2-AAC-HD, RH3-AAC-HD												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0	L-5	N-5 to P-6	Q-5					
1	Mullion – Prefoam	-	2A1351G02	1	1	1	1					
2	Pilaster – Mullion	AL	2A0205-21	2	2	2	-					
			2A3246-21				2					
2a	Truss Head Screw	5x12, SS	7C32-0512	6	6	6	6					
3	Plate – Strike (Front)	SS	4A0355-01	2	2	2	2					
3a	Truss Head Screw	4x8, SS	7C32-0408	2	2	2	2					
4	Plate – Strike (Base)	SS	4A0354-01	2	2	2	2					
4a	T2 Screw	4x8, SS	7P32-0408	4	4	4	4					
5	Bulb – Light	GE, 40A15	4A0437-01	1	-							
		-	4A2420-01		1	1	1					
6	Shield – Light	2778-1010-3000	4A0465-01	1	1	1	1					
6a	Cheese Head Screw	5x12, SS	7C52-0512	2	2	2	2					
6b	Washer	8, SS	7W22-0800	2	2	-	-					
7	Threaded Insert (Wide)		4A0839-01	Non-interchangeable part change. If light socket is not operating for these codes, Hoshizaki recommends replacement with HS-3554 (below).		2	2					
8	Lampholder	-	4A2862-01			1	1					

HS-3554-Lampholder Conversion Kit												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				L-5 and earlier								
HS1	Plate – Lampholder Mount	SS	4A2880-01	1								
HS1a	Cheese Head Screw	SS	7C52-0512	2								
HS2	Lampholder		4A2862-01	1								
HS2a	Terminal – Flag	DNFR18-250FIBK	8101-18FJ	2								

U. Mullion-Tee
RH3-AAC-HD
 K-0, N-6, Q-5

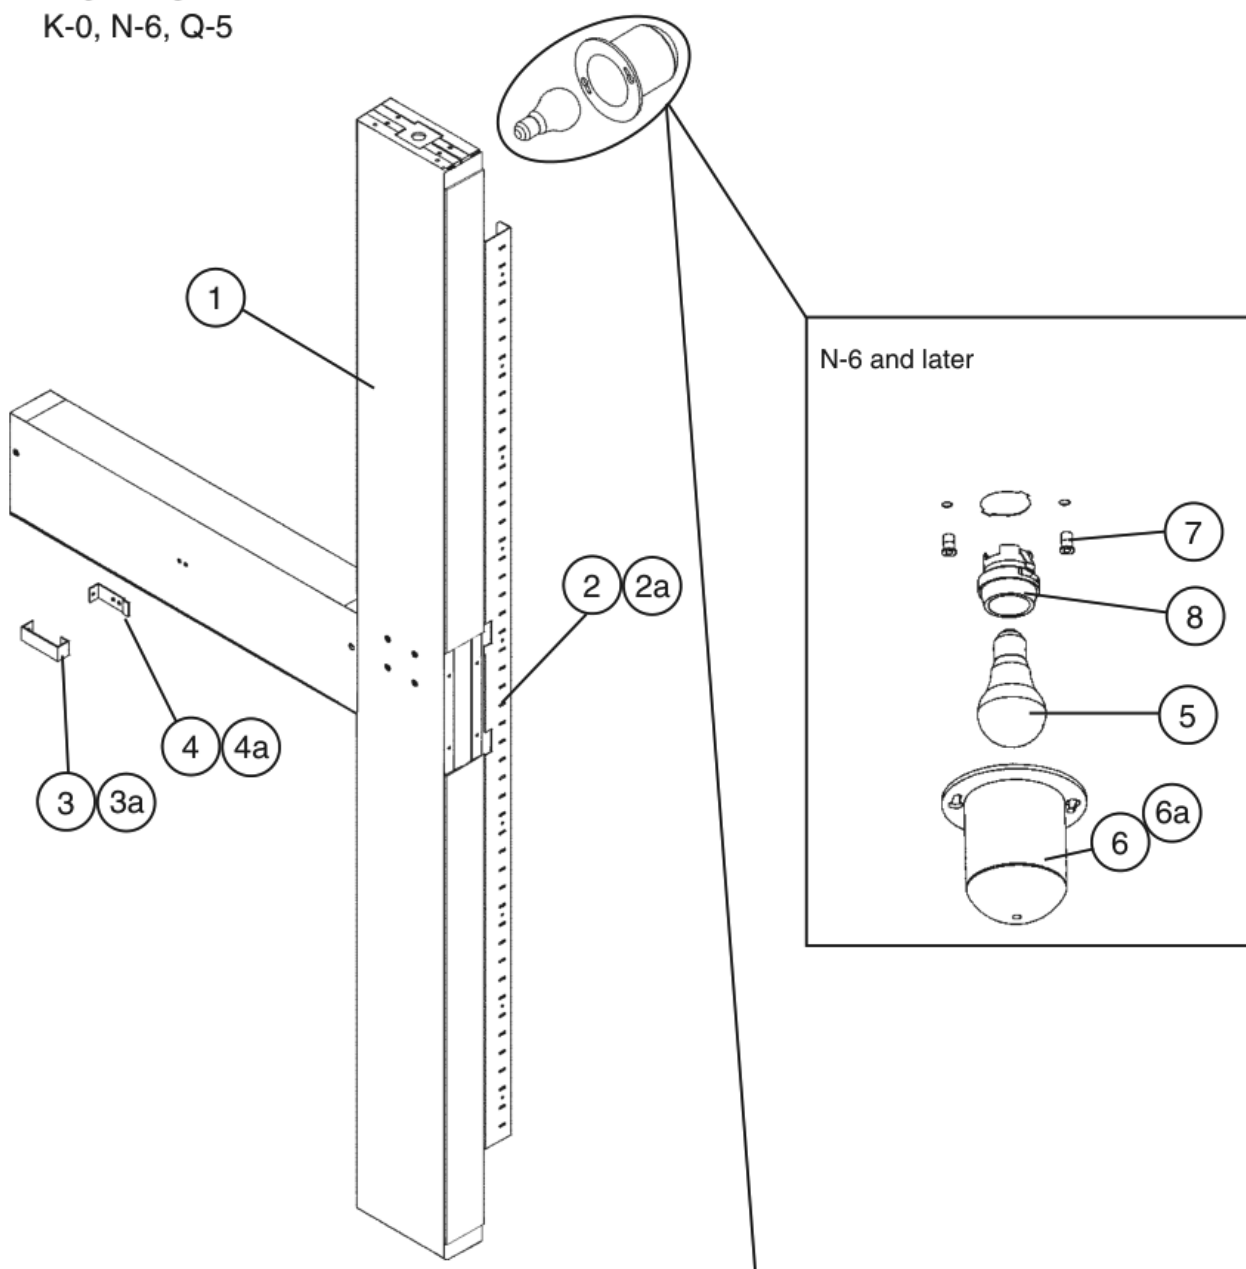


K-0

The santoprene light socket was changed to a porcelain lampholder at N-6. This change is non-interchangeable. If the light socket is not operating on a unit with a santoprene light socket, Hoshizaki recommends replacement with HS-3554.

Note:

Parts 5, 6 and 6a are not included in HS-3554; they are shown for reference only.

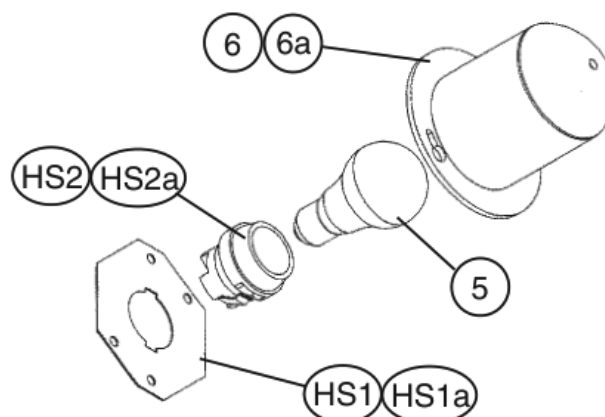


Title: U. Mullion-Tee Model: RH3-AAC-HD												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0	N-6	Q-5						
1	Mullion – Prefoam	-	2A1384G02	1	1	1						
2	Pilaster – Mullion	AL	2A0205-21	2	2	-						
			2A3246-21			2						
2a	Truss Head Screw	5×10, SS	7C32-0510	6	6	6						
3	Plate – Strike (Front)	SS	4A0355-01	1	1	1						
3a	Truss Head Screw	4×8, SS	7C32-0408	1	1	1						
4	Plate – Strike (Base)	SS	4A0354-01	1	1	1						
4a	T2 Screw	4×8, SS	7P32-0408	2	2	2						
5	Bulb – Light	GE, 40A15	4A0437-01	1	-							
		-	4A2420-01		1	1						
6	Shield – Light	2778-1010-3000	4A0465-01	1	1	1						
6a	Cheese Head Screw	5×12, SS	7C52-0512	2	2	2						
6b	Washer	8, SS	7W22-0800	2	-							
7	Threaded Insert (Wide)	-	4A0839-01	Non-interchangeable part change. If light socket is not operating for these codes, Hoshizaki recommends replacement with HS-3554 (below).	2	2						
8	Lampholder	-	4A2862-01		1	1						

HS-3554-Lampholder Conversion Kit												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0								
HS1	Plate – Lampholder Mount	SS	4A2880-01	1								
HS1a	Cheese Head Screw	SS	7C52-0512	2								
HS2	Lampholder		4A2862-01	1								
HS2a	Terminal – Flag	DNFR18-250FIBK	8101-18FJ	2								

V. Label Location

RH1-AAC(-HD)

K-0, K-1, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

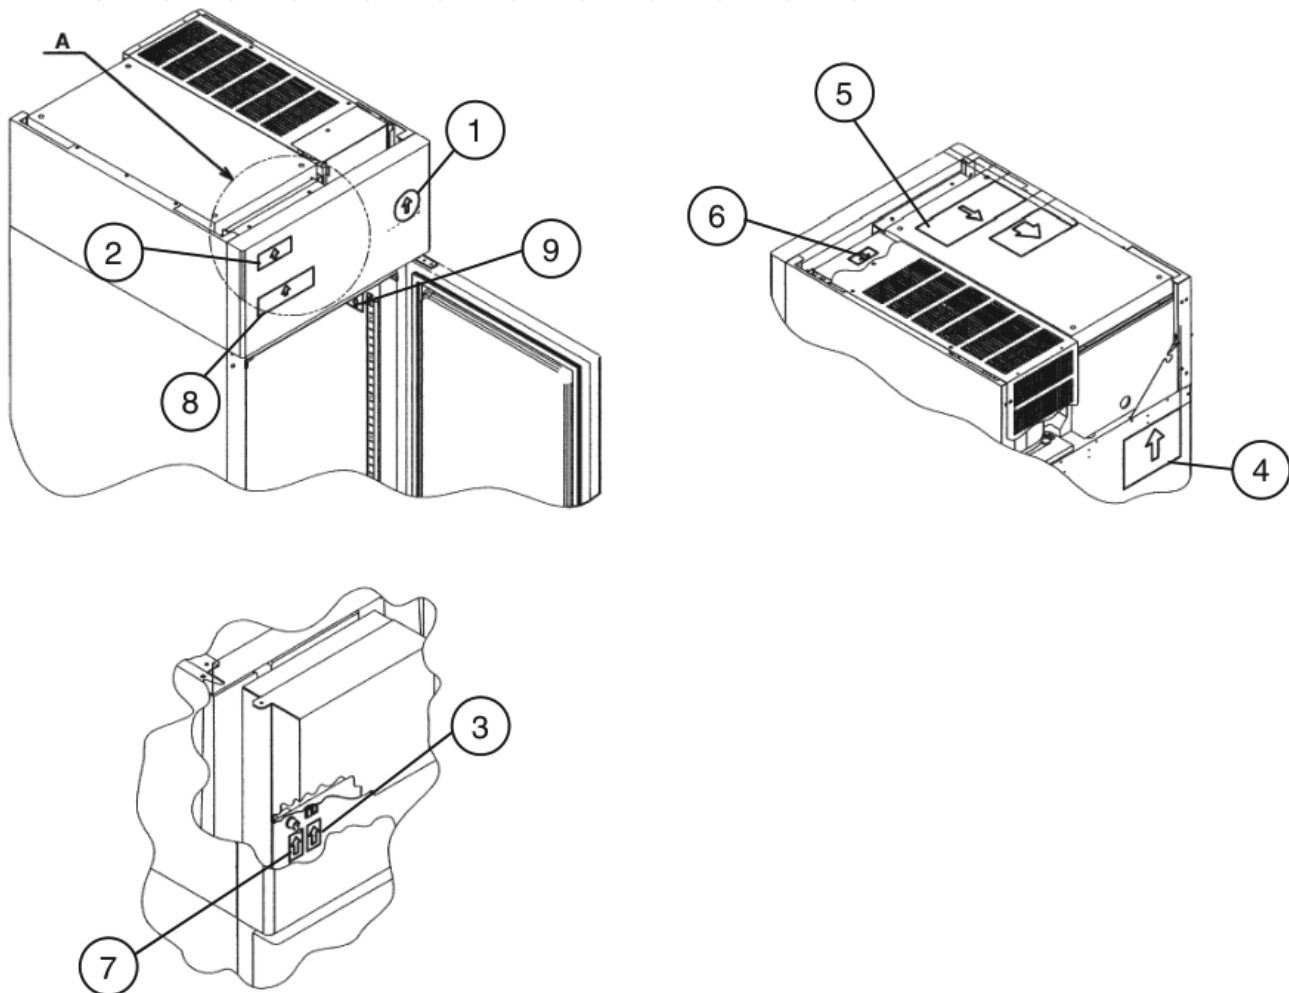


VIEW A

Title: V. Label Location Model: RH1-AAC(-HD)										
Index No.	Description	Material or Model Number	Part Number	Required Number						
				K-0 to Q-5						
1	Label – Penguin HA (L)	-	4A0526-02	1						
2	Emblem – Hoshizaki	-	4A0560-01	1						
3	Label – Door Heater Switch	PVC FILM	4A1039-01	1						
4	Caution Label	PVC FILM	4A1931-01	1						
5	Wiring Diagram	PVC FILM	2A2350-01	1						
6	Label – R134a	-	444463-01	1						
7	Label – Power	-	4A2196-01	1						
8	Label – Display	-	4A2198-01	1						
9	Cover – Nameplate	-	4A3727-01	1						

V. Label Location

RH2-AAC(-HD)


K-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

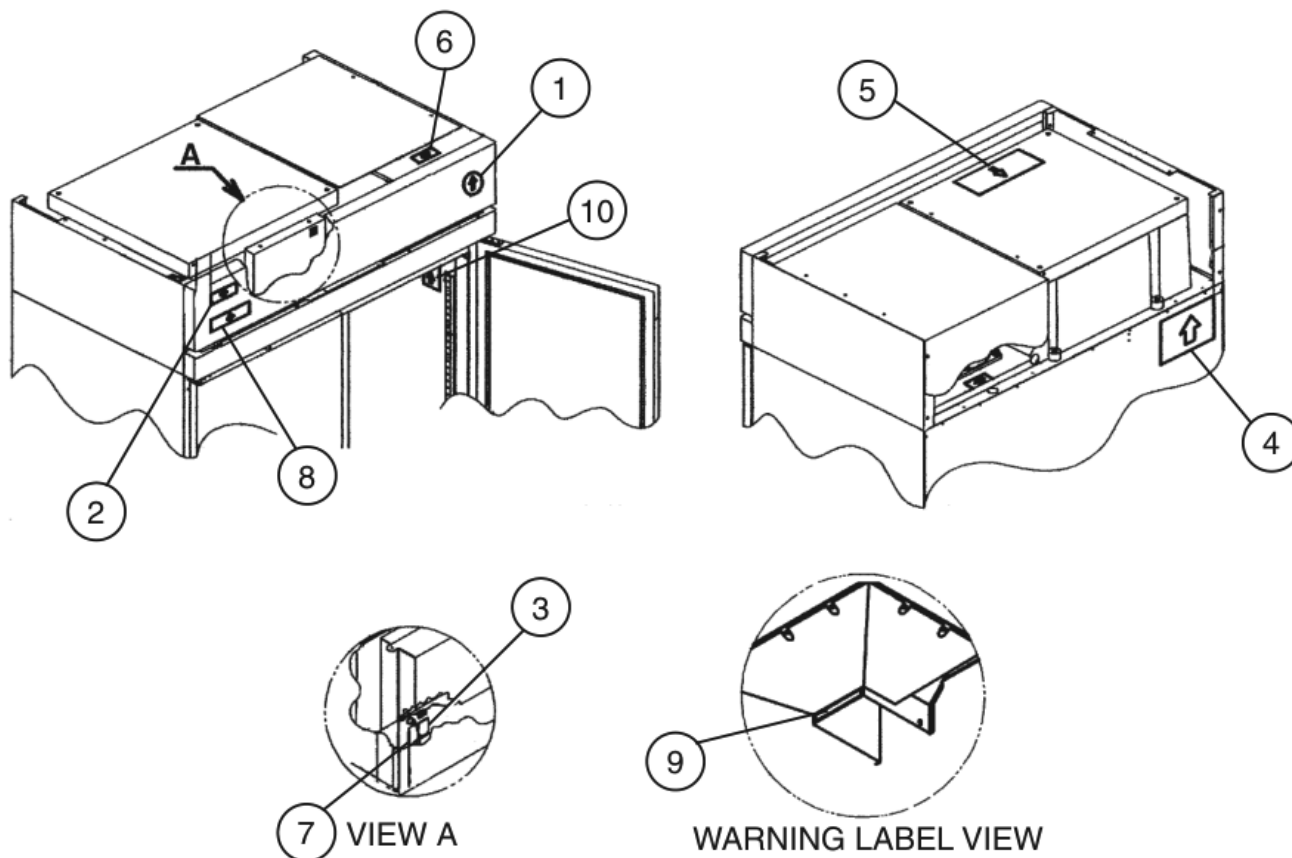

Title: V. Label Location Model: RH2-AAC(-HD)												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0 to Q-5								
1	Label – Penguin-ha(L)	-	4A0526-02	1								
2	Emblem – Hoshizaki	-	4A0560-01	1								
3	Label – Door Heater Switch	PVC FILM	4A1039-01	1								
4	Caution Label	PVC FILM	4A1931-01	1								
5	Wiring Diagram	PVC FILM	2A2352-01	1								
6	Label – R134a	-	444463-01	1								
7	Label – Power	-	4A2196-01	1								
8	Label – Display	-	4A2198-01	1								
9	Label – Warning	-	4A2968-01	1								
10	Cover – Nameplate	-	4A3727-01	1								

V. Label Location RH3-AAC(-HD)

K-0, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, Q-5

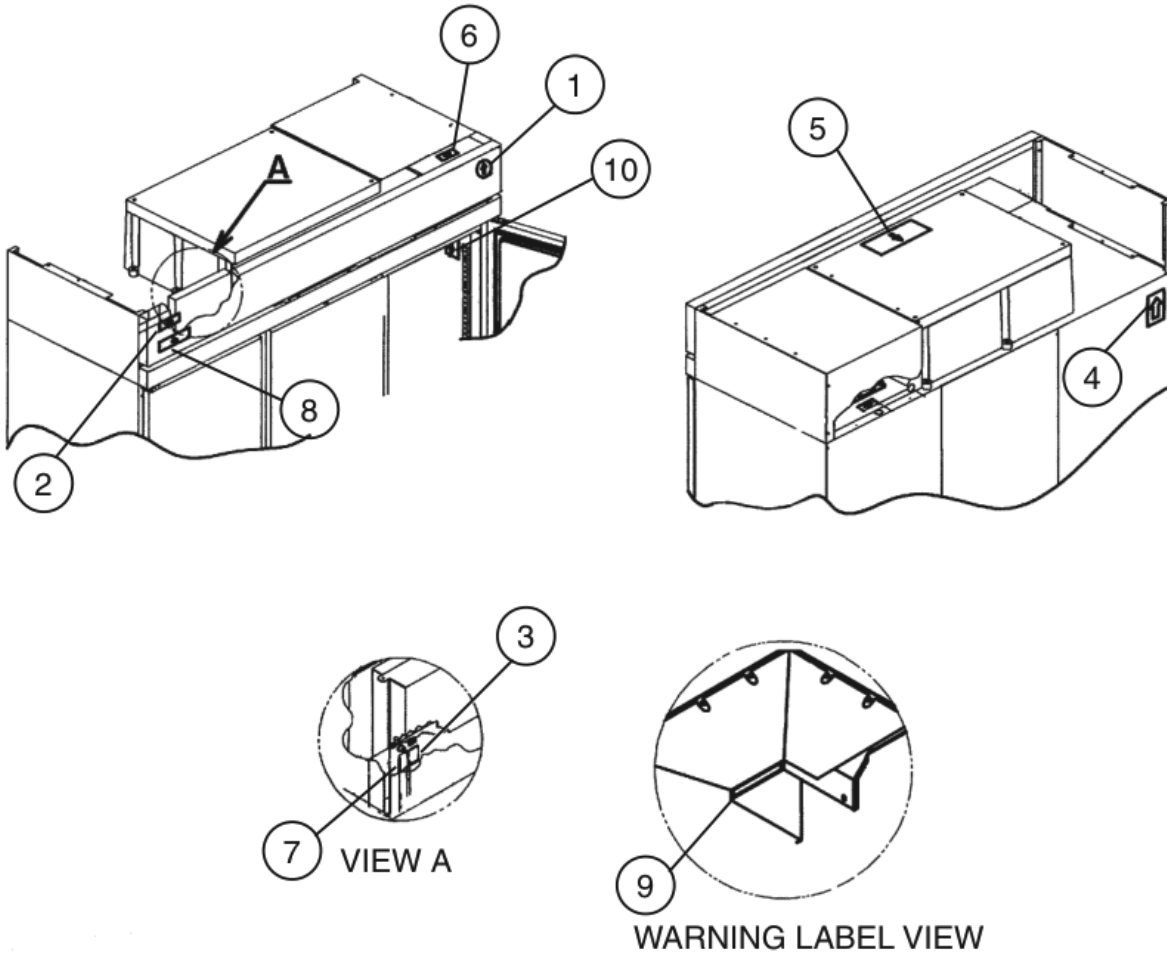

Title: V. Label Location Model: RH3-AAC(-HD)												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0 to N-6								
1	Label – Penguin HA (L)	-	4A0526-02	1								
2	Emblem – Hoshizaki	-	4A0560-01	1								
3	Label – Door Heater Switch	PVC FILM	4A1039-01	1								
4	Caution Label	PVC FILM	4A1931-01	1								
5	Wiring Diagram	PVC FILM	2A2354-01	1								
6	Label – R134a	-	444463-01	1								
7	Label – Power	-	4A2196-01	1								
8	Label – Display	-	4A2198-01	1								
9	Label – Warning	-	4A2968-01	1								
10	Cover – Nameplate	-	4A3727-01	1								

W. Literature & Packaging

RH1-AAC(-HD), RH2-AAC(-HD), RH3-AAC(-HD)

K-0, K-1, L-0, L-5, M-5, M-6, M-7, N-5, N-6, P-5, P-6, P-7, Q-5

Title: W. Literature & Packaging Model: RH1-AAC(-HD), RH2-AAC(-HD), RH3-AAC(-HD)												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				K-0 to P-7	Q-5							
1	Instruction Manual	Paper	91A34010L	1	1							
Packaging (available only for models currently in production)												
		RH1-AAC	1A0765A04	1	1							
		RH1-AAC-HD	1A0765A05	1	1							
		RH2-AAC	1A0766A06	1	1							
		RH2-AAC-HD	1A0766A07	1	1							
		RH3-AAC	1A0767A06	1	1							
		RH3-AAC-HD	1A0767A07	1	1							
1	Filler – Door		4A2977-01	2	2							
2	Pad – Corner		3A2598-01	4	4							
3	Post – Corner		3A2603-01	4	4							
4	Support – Corner		3A2596-01	4	4							
5	T2 Screw	4x8, SS	7P32-0408	4	4							
6	Bracket (A) – Overflow Pan		4A0878-01	1	1							
7	Bracket (B) – Overflow Pan		4A0879-01	1	1							
8	Pan – Overflow		4A2081-01	1	-							
			4A3419G01		1							
9	Stop – Door		4A1873-01	1	1							
10	Flat Washer		7W2115800	4	4							
11	Hex Head Bolt		7B01 I5825	4	4							
12	Pallet		3A1814-01	1	1							
13	Door Stop – Center	Half-Door Models Only	4A1874-01	1	1							
14	Protector – Front	RH2-AAC(-HD) RH3-AAC(-HD)	3A2595-01	1	1							