

Hoshizaki America, Inc.

Modular Crescent Cuber

Models

KMD-700MAH

KMD-700MWH

KMD-700MRH



“A Superior Degree
of Reliability”

www.hoshizaki.com

PARTS LIST



Number: 71221
Issued: 5-29-2003
Revised: 1-9-2008

CONTENTS

Auxiliary Codes.....	3
Note About Ordering Parts	3
Material Abbreviations	4
A. Ice Cuber Assembly	5
KMD-700MAH	5
KMD-700MWH	9
KMD-700MRH	13
B. Refrigeration Circuit.....	17
KMD-700MAH	17
KMD-700MWH	23
KMD-700MRH	29
C. Water Circuit.....	35
KMD-700MAH, MWH, MRH	35
D. Control Box Assembly	38
KMD-700MAH, MWH, MRH	38
E. Label Location	41
KMD-700MAH	41
KMD-700MWH	44
KMD-700MRH	47
F. Pump Motor Assembly	50
KMD-700MAH, MWH, MRH	50
G. Accessories and Packaging	52
KMD-700MAH, MWH, MRH	52

Auxiliary Codes

KMD-700MAH	N-0	April 2003
	N-1	September 2003
	P-0	December 2003
	P-2	February 2004
	P-3	June 2004
	Q-0	January 2005
	R-0	December 2005
	R-1	August 2006
	S-1	January 2007
	T-0	January 2008

KMD-700MWH	N-0	May 2003
	N-1	October 2003
	P-2	February 2004
	Q-0	April 2005
	R-0	January 2006
	R-1	August 2006
	S-1	February 2007
	T-0	February 2008

KMD-700MRH	N-0	May 2003
	N-1	September 2003
	P-1	December 2003
	P-2	January 2004
	Q-0	April 2005
	R-0	January 2006
	R-1	September 2006
	S-1	January 2007
	T-0	January 2008

Auxiliary Code Breakdown

K-0

- └─ Designates the year. "K" indicates the year 2000. Years progress or regress in alphabetical order.
 "J" is 1999, "L" is 2001, "M" is 2002, and so on. The letters "I" and "O" were skipped.
- └─ Designates significant part changes within the same year for this model. Base is 0 and this number advances for each change.

Example: P-1

- └─ "P" indicates 2004.
- └─ "1" indicates the first significant part change for 2004.

Note About Ordering Parts

Most assemblies cannot be ordered as complete units; parts in the assemblies generally must be ordered separately.

Material Abbreviations

ALUMINUM

AL = Aluminum

COPPER

CU = Copper

PLASTIC

ABS = Acrylonitrile -butadiene - styrene
AC = Polyacetal
EVA = Ethylene vinyl acetate
PA = Polyamide = Nylon
PC = Polycarbonate
PE = Polyethylene
PES = Polyester
PETP = Polyethylene terephthalate = Tetlon
PP = Polypropylene
PS = Polystyrene
PTFE = Polytetrafluoroethylene = Teflon
PUR = Polyurethane
PVC = Polyvinyl chloride


RUBBER

VN = Vinyl Nitrile
EPDM = EP rubber
NBR = Nitrile butadiene rubber
NR = Natural rubber
NP = Neoprene
SI.R = Silicone rubber
SY.R = Synthetic rubber
EPH = Epichlorohydrin

STEEL

GS = Galvanized steel
SS = Stainless steel
PS = Plated steel
PAS = Primed steel


A. Ice Cuber Assembly
KMD-700MAH
 N-0

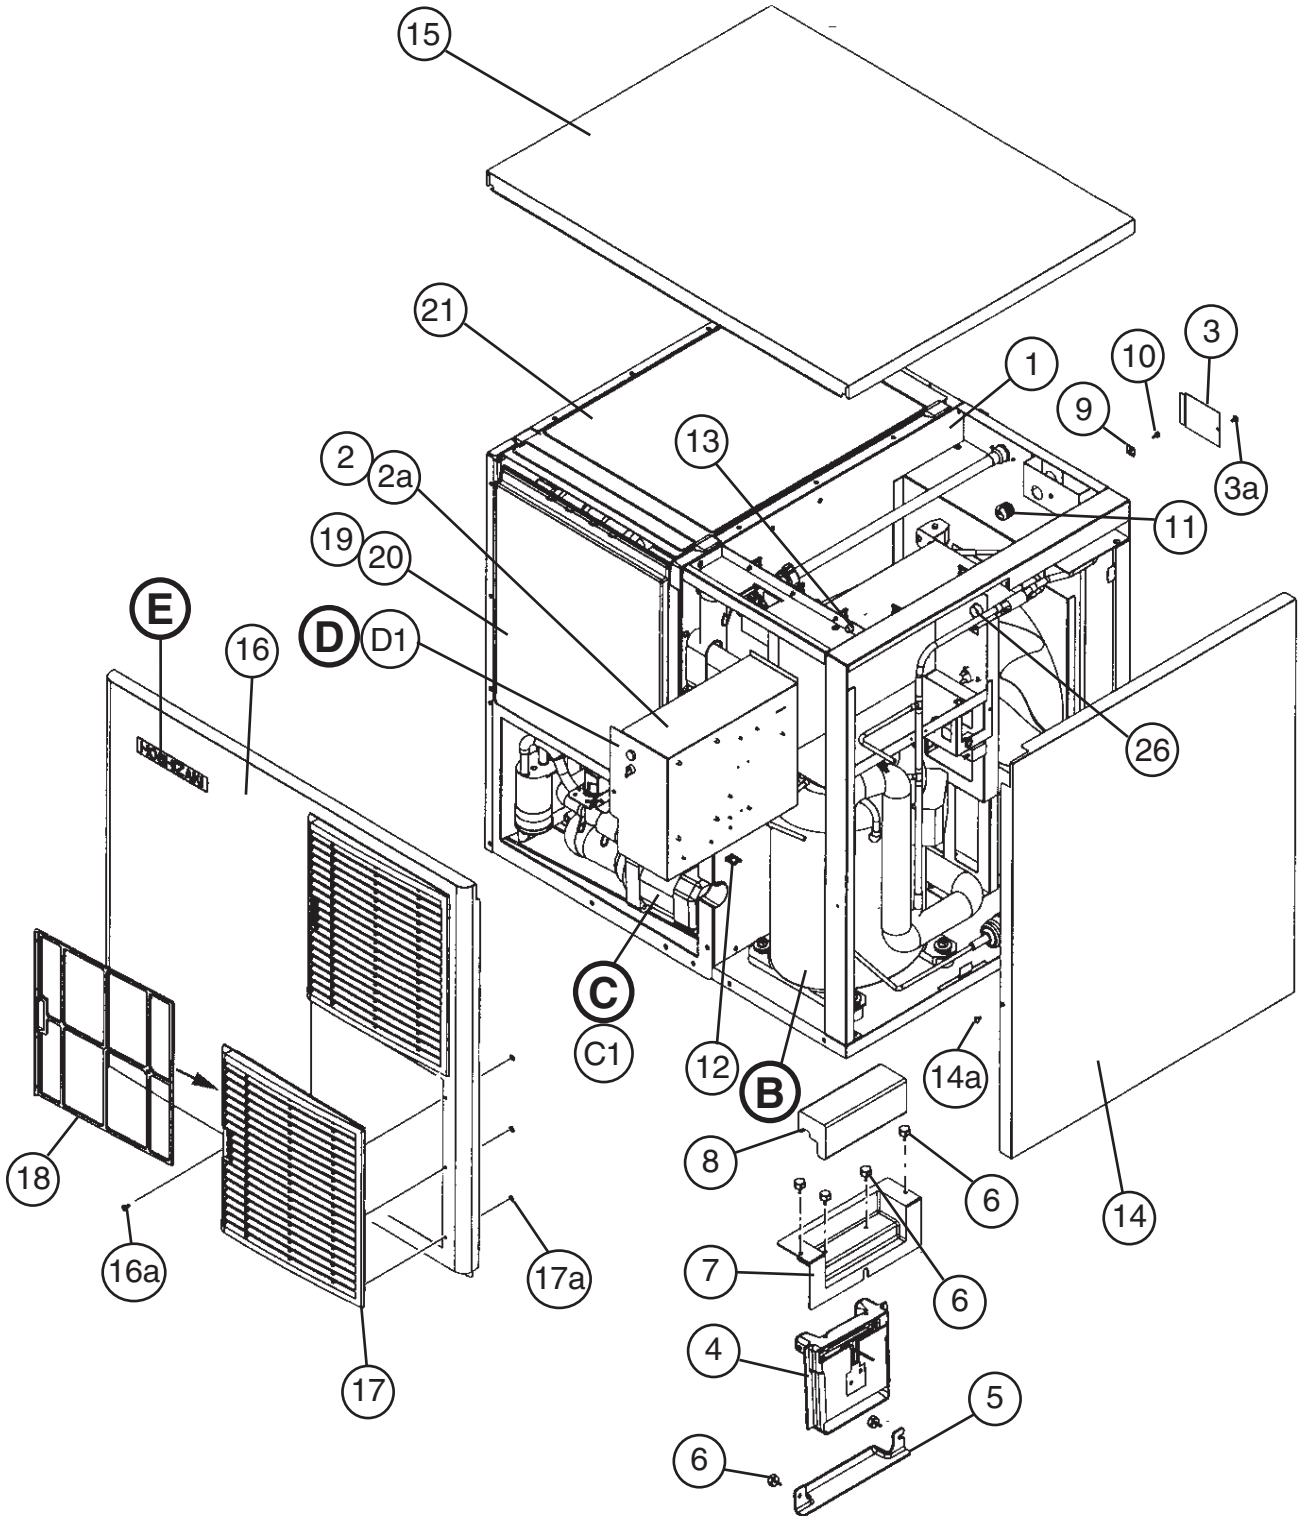

A. Ice Cuber Assembly

KMD-700MAH


N-1, P-0, P-2, P-3, Q-0, R-0, R-1, S-1, T-0

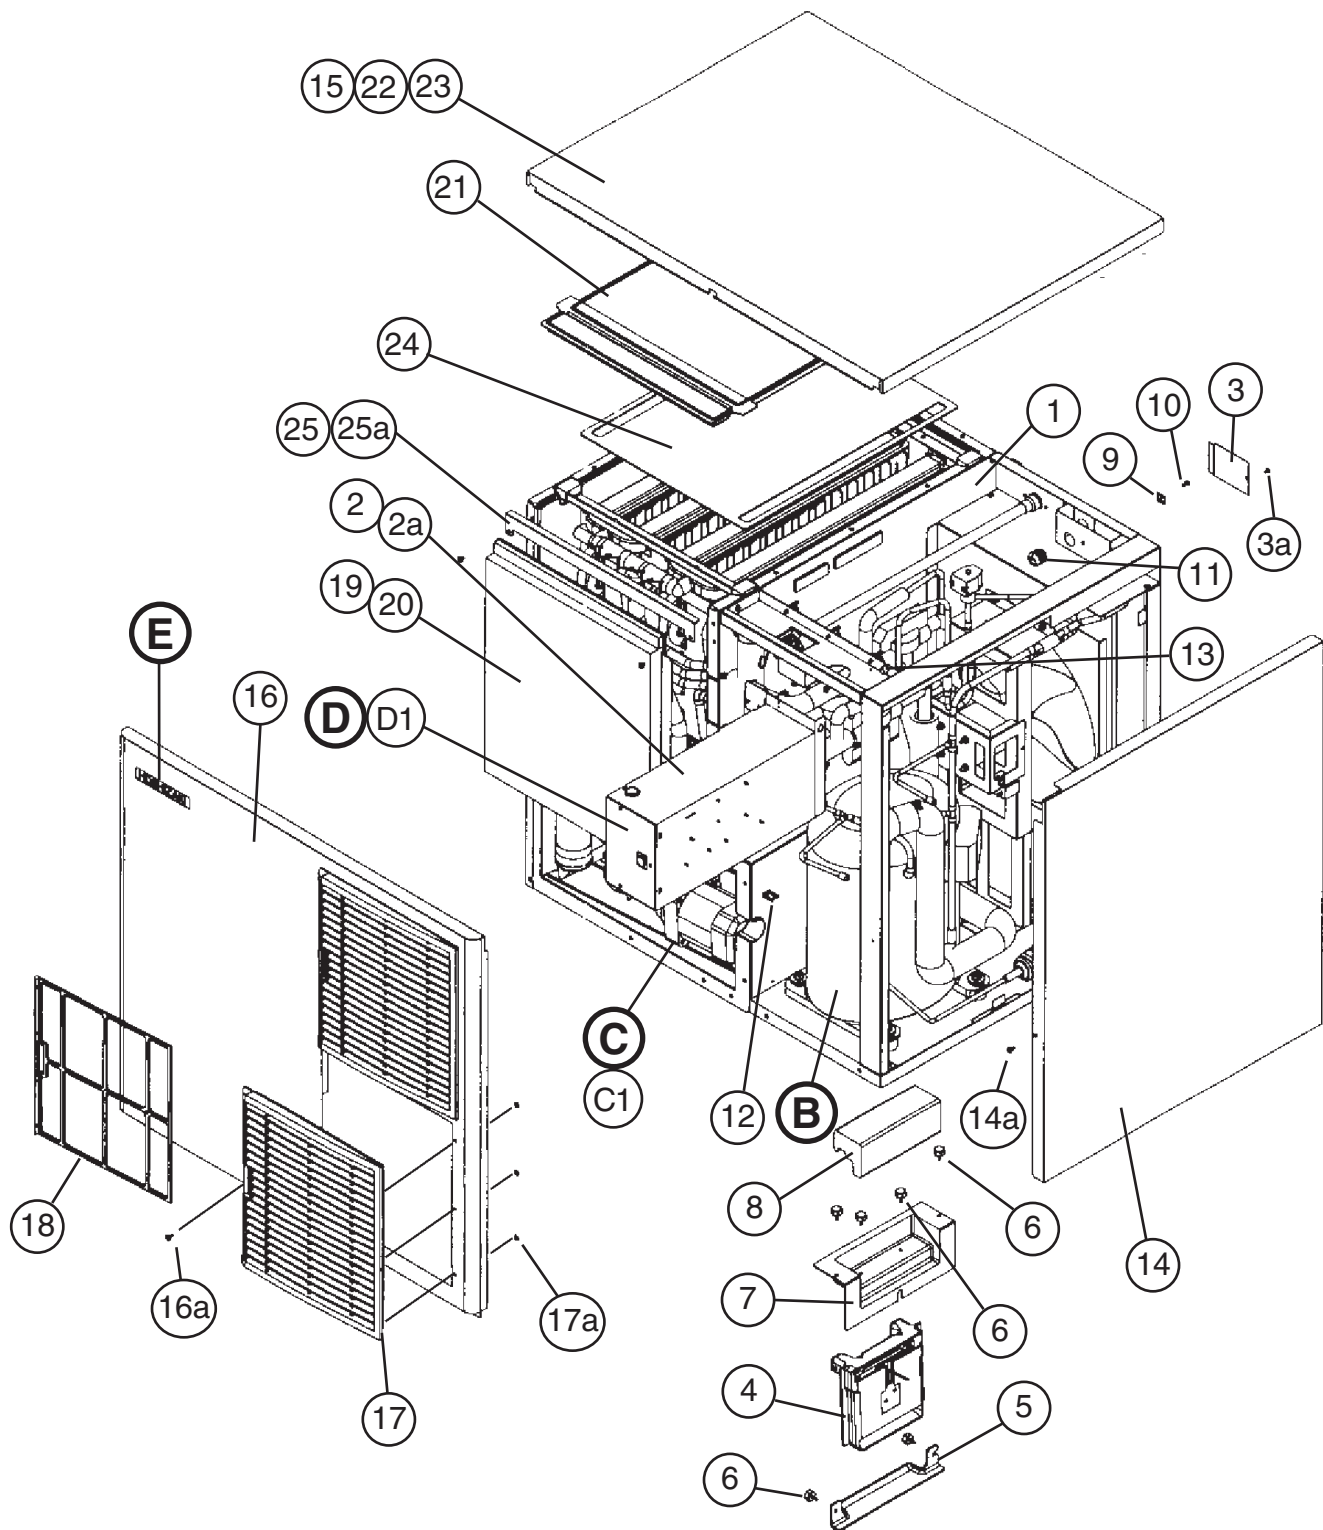

Title: A. Ice Cuber Assembly Model: KMD-700MAH											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0	N-1 P-0	P-2 to Q-0	R-0 to T-0				
B	Refrigeration Circuit	-	1A0799A01	1	-						
			1A0881A01		1	1	1				
C	Water Circuit	-	1A0800A01	1	-						
			1A0800A02		1	-					
			1A0800A03			1	1				
C1	Truss Head Screw	4x10, SS	7C32-0410	1	1	1	1				
D	Control Box Assembly	-	2A2818A01	1	1	-					
			2A3051A01			1	1				
D1	T2 Screw	4x8	7P31-0408	1	1	-					
						3	3				
E	Label Location	-	2A2819A01	1	1	1	1				
1	Evaporator Case	-	1A0790G01	1	-						
			1A0857G01		1	1	1				
2	Control Box Cover	GS	3A2687G01	1	1	-					
			3A2371-01			1	1				
2a	T2 Screw	4x8	7P31-0408	3	3	3	3				
3	Junction Box Cover	GS	433410-01	1	1	1	1				
3a	T2 Screw	4x8	7P31-0408	1	1	1	1				
4	Bin Control	-	464574-01	1	1	1	1				
5	Switch Guide	-	3A2643-01	1	1	1	1				
6	Thumbscrew	Black	415949G10	6	6	6	6				
7	Switch Cover	-	3A2642-01	1	1	1	1				
8	Insulation Switch	-	4A3068-01	1	1	1	1				
9	Square Washer	-	433537-01	1	-						
			433537-02		1	1	1				
10	Screw – Grounding	-	433304-02	1	1	1	1				
11	Bushing	SR-34-2	420472-05	1	1	1	1				
12	Wire Saddle	VS-4238-M	4A0338-02	9	9	9	9				
13	Bushing	OCB-500	428394-02	2	2	2	2				
14	Side Panel (R)	SS	2A2800G01	1	1	1	1				
14a	Truss Head Screw	4x10, SS	7C32-0410	1	1	1	1				
15	Top Panel	SS	2A2801-01	1	-						
	Top Panel Assembly		2A2955G01		1	1	1				
16	Front Panel	SS	2A2802-01	1	-						
	Front Panel Assembly		2A2958G01		1	1	1				
16a	Truss Head Screw	4x10, SS	7C32-0410	1	1	1	1				
17	Louver A	-	1A0547-01	2	2	2	2				
17a	Push Retainer	-	4A2414-01	6	6	6	6				
18	Air Filter A	-	2A2062G01	2	2	2	2				
19	Front Insulation	-	3A2722G01	1	-						
			3A2933G01		1	1	1				
20	Thumbscrew	-	415949G01	1	1	1	1				
21	Top Insulation	-	3A2723G01	1	-						
			3A2934G01		1	1	1				

Title: A. Ice Cuber Assembly Model: KMD-700MAH											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0	N-1 P-0	P-2 to Q-0	R-0 to T-0				
22	Top Panel Insulation (B2)	-	3A2928-02	-	1	1	1				
23	Top Panel Insulation (B3)	-	3A2928-03	-	1	1	1				
24	Top Cover	ABS	3A2922-01	-	1	1	1				
25	Front Insulation Bracket	GS	3A2909-01	-	1	1	1				
25a	T2 Screw	4x8, SS	7P32-0408	-	2	2	2				
26	Bushing	OCB-875	428394-04	2	2	-					


A. Ice Cuber Assembly
KMD-700MWH
 N-0

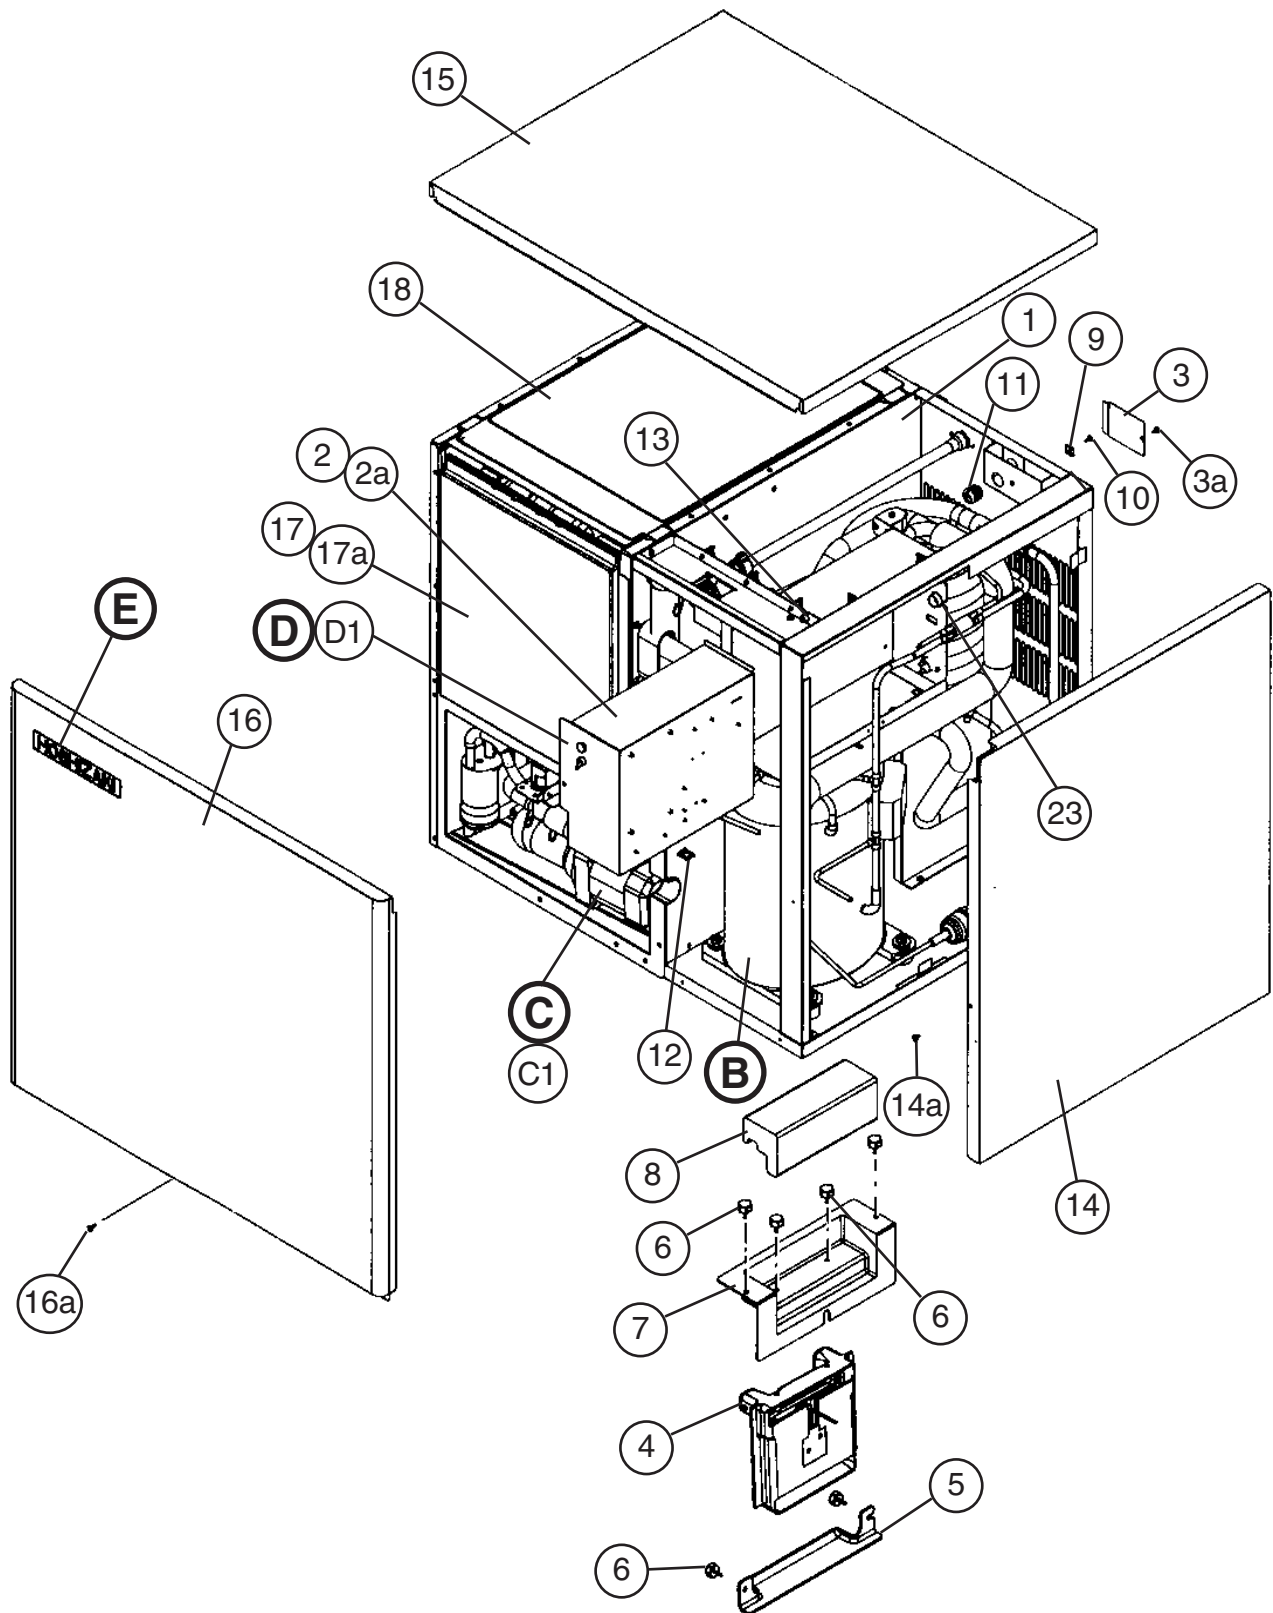

A. Ice Cuber Assembly

KMD-700MWH


N-1, P-2, Q-0, R-0, R-1, S-1, T-0

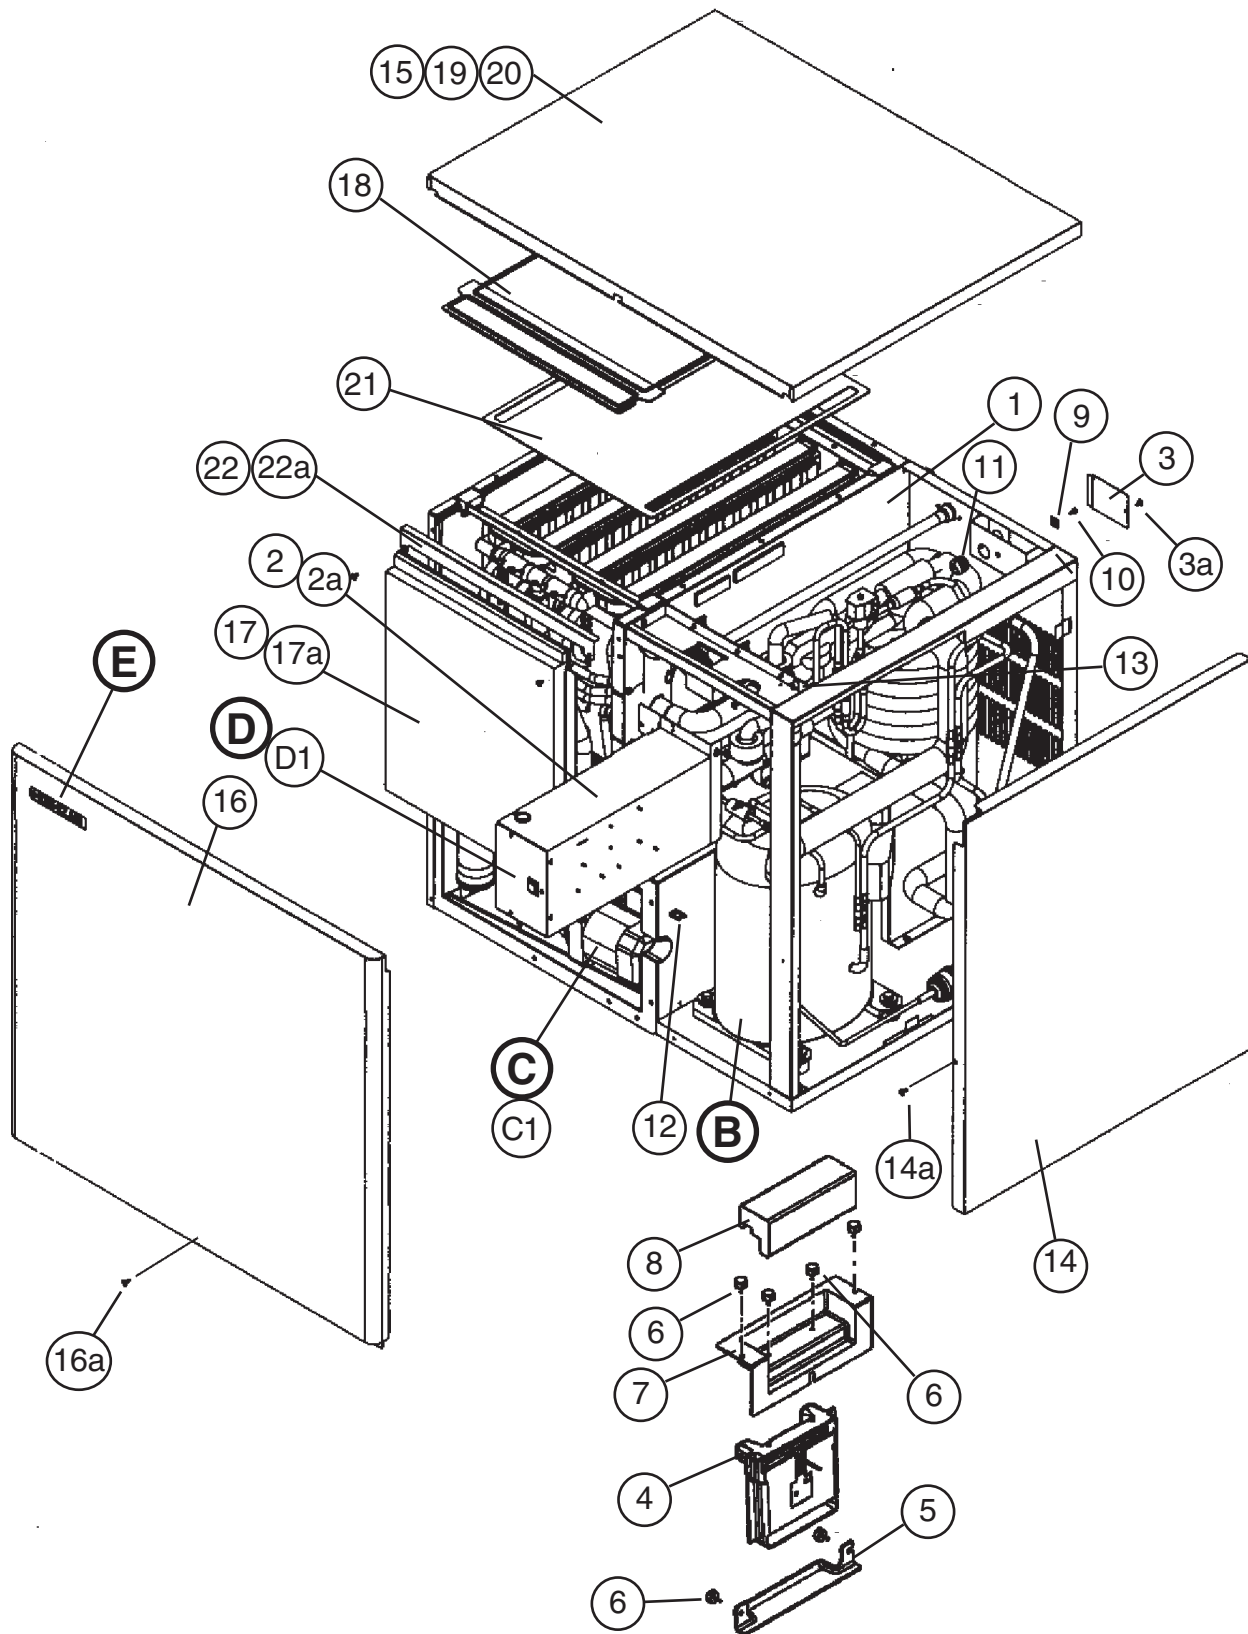

Title: A. Ice Cuber Assembly Model: KMD-700MWH											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0	N-1	P-2 Q-0	R-0 to T-0				
B	Refrigeration Circuit	-	1A0815A01	1	-						
			1A0902A01		1	1	1				
C	Water Circuit	-	1A0800A01	1	-						
			1A0800A02		1	-					
			1A0800A03			1	1				
C1	Truss Head Screw	4x8, SS	7C32-0408	2	2	2	2				
D	Control Box Assembly	-	2A2818A01	1	1	-					
			2A3051A01			1	1				
D1	T2 Screw	4x8	7P31-0408	1	1	-					
						3	3				
E	Label Location	-	2A2839A01	1	1	1	1				
1	Evaporator Case	-	1A0790G02	1	-						
			1A0857G02		1	-					
			1A0857G01			1	1				
2	Control Box Cover	GS	3A2687G01	1	1	-					
			3A2371-01			1	1				
2a	T2 Screw	4x8	7P31-0408	3	3	3	3				
3	Junction Box Cover	GS	433410-01	1	1	1	1				
3a	T2 Screw	4x8	7P31-0408	1	1	1	1				
4	Bin Control	-	464574-01	1	1	1	1				
5	Switch Guide	-	3A2643-01	1	1	1	1				
6	Thumbscrew	-	415949G10	6	6	6	6				
7	Switch Cover	-	3A2642-01	1	1	1	1				
8	Insulation Switch	-	4A3068-01	1	1	1	1				
9	Square Washer	-	433537-01	1	-						
			433537-02		1	1	1				
10	Screw – Grounding	-	433304-02	1	1	1	1				
11	Bushing	SR-34-2	420472-05	1	1	1	1				
12	Wire Saddle	VS-4238-M	4A0338-02	9	9	9	9				
13	Bushing	OCB-500	428394-02	1	1	1	1				
14	Side Panel (R)	SS	2A2800G01	1	1	1	1				
14a	Truss Head Screw	4x8, SS	7C32-0408	1	1	1	1				
15	Top Panel	SS	2A2801-01	1	-						
	Top Panel Assembly		2A2955G01		1	1	1				
16	Front Panel	SS	2A2802-02	1	-						
	Front Panel Assembly		2A2956G01		1	1	1				
16a	Truss Head Screw	4x10, SS	7C32-0410	1	1	1	1				
17	Front Insulation	-	3A2722G01	1	-						
			3A2933G01		1	1	1				
17a	Thumbscrew	-	415949G01	1	1	1	1				
18	Top Insulation	-	3A2723G01	1	-						
			3A2934G01		1	1	1				
19	Top Panel Insulation (B2)	-	3A2928-02	-	1	1	1				
20	Top Panel Insulation (B3)	-	3A2928-03	-	1	1	1				


Title: A. Ice Cuber Assembly Model: KMD-700MWH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0	N-1	P-2 Q-0	R-0 to T-0					
21	Top Cover	ABS	3A2922-01	-	1	1	1					
22	Front Insulation Bracket	GS	3A2909-01	-	1	1	1					
22a	T2 Screw	4x8, SS	7P32-0408	-	2	2	2					
23	Bushing	OCB-875	428394-04	2	2	-						

A. Ice Cuber Assembly
KMD-700MRH
 N-0

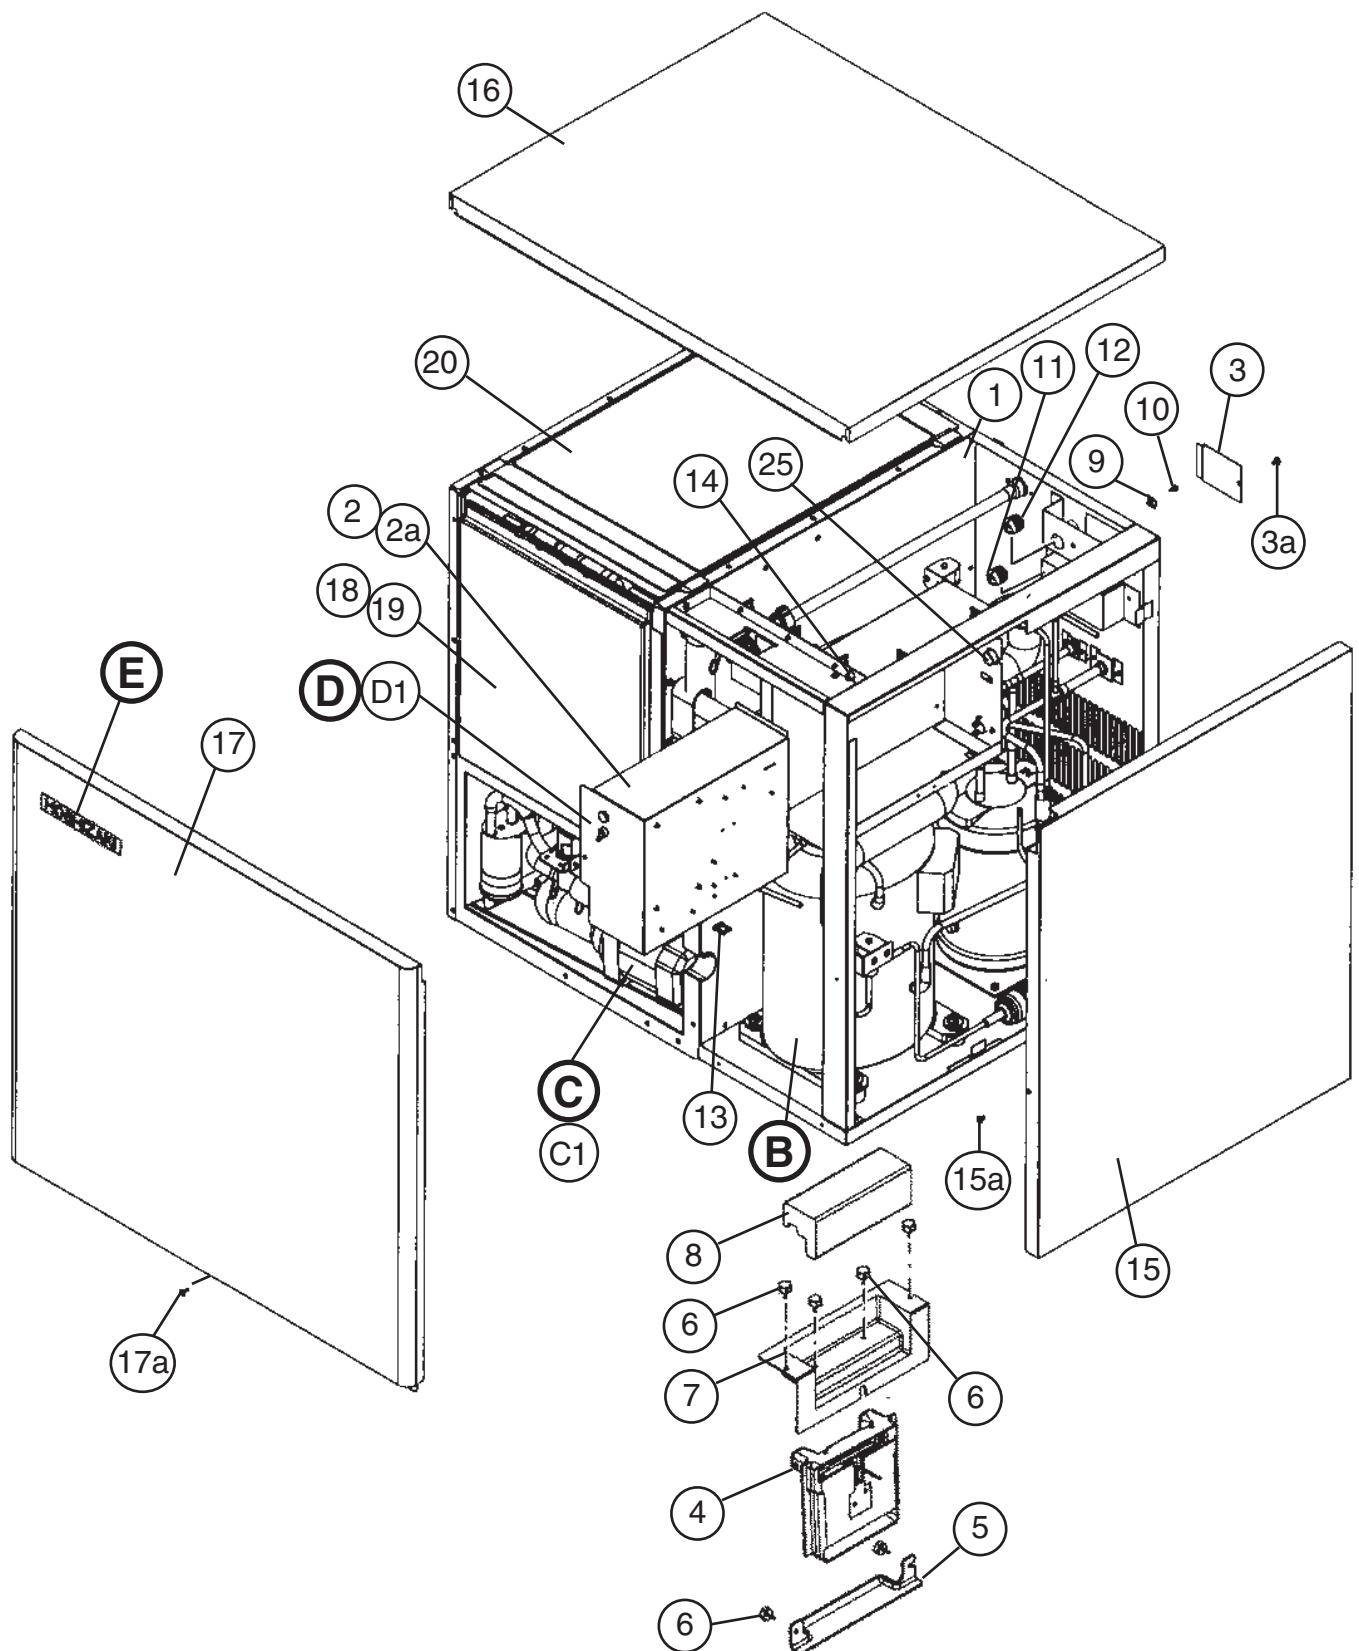

A. Ice Cuber Assembly
KMD-700MRH


N-1, P-1, P-2, Q-0, R-0, R-1, S-1, T-0

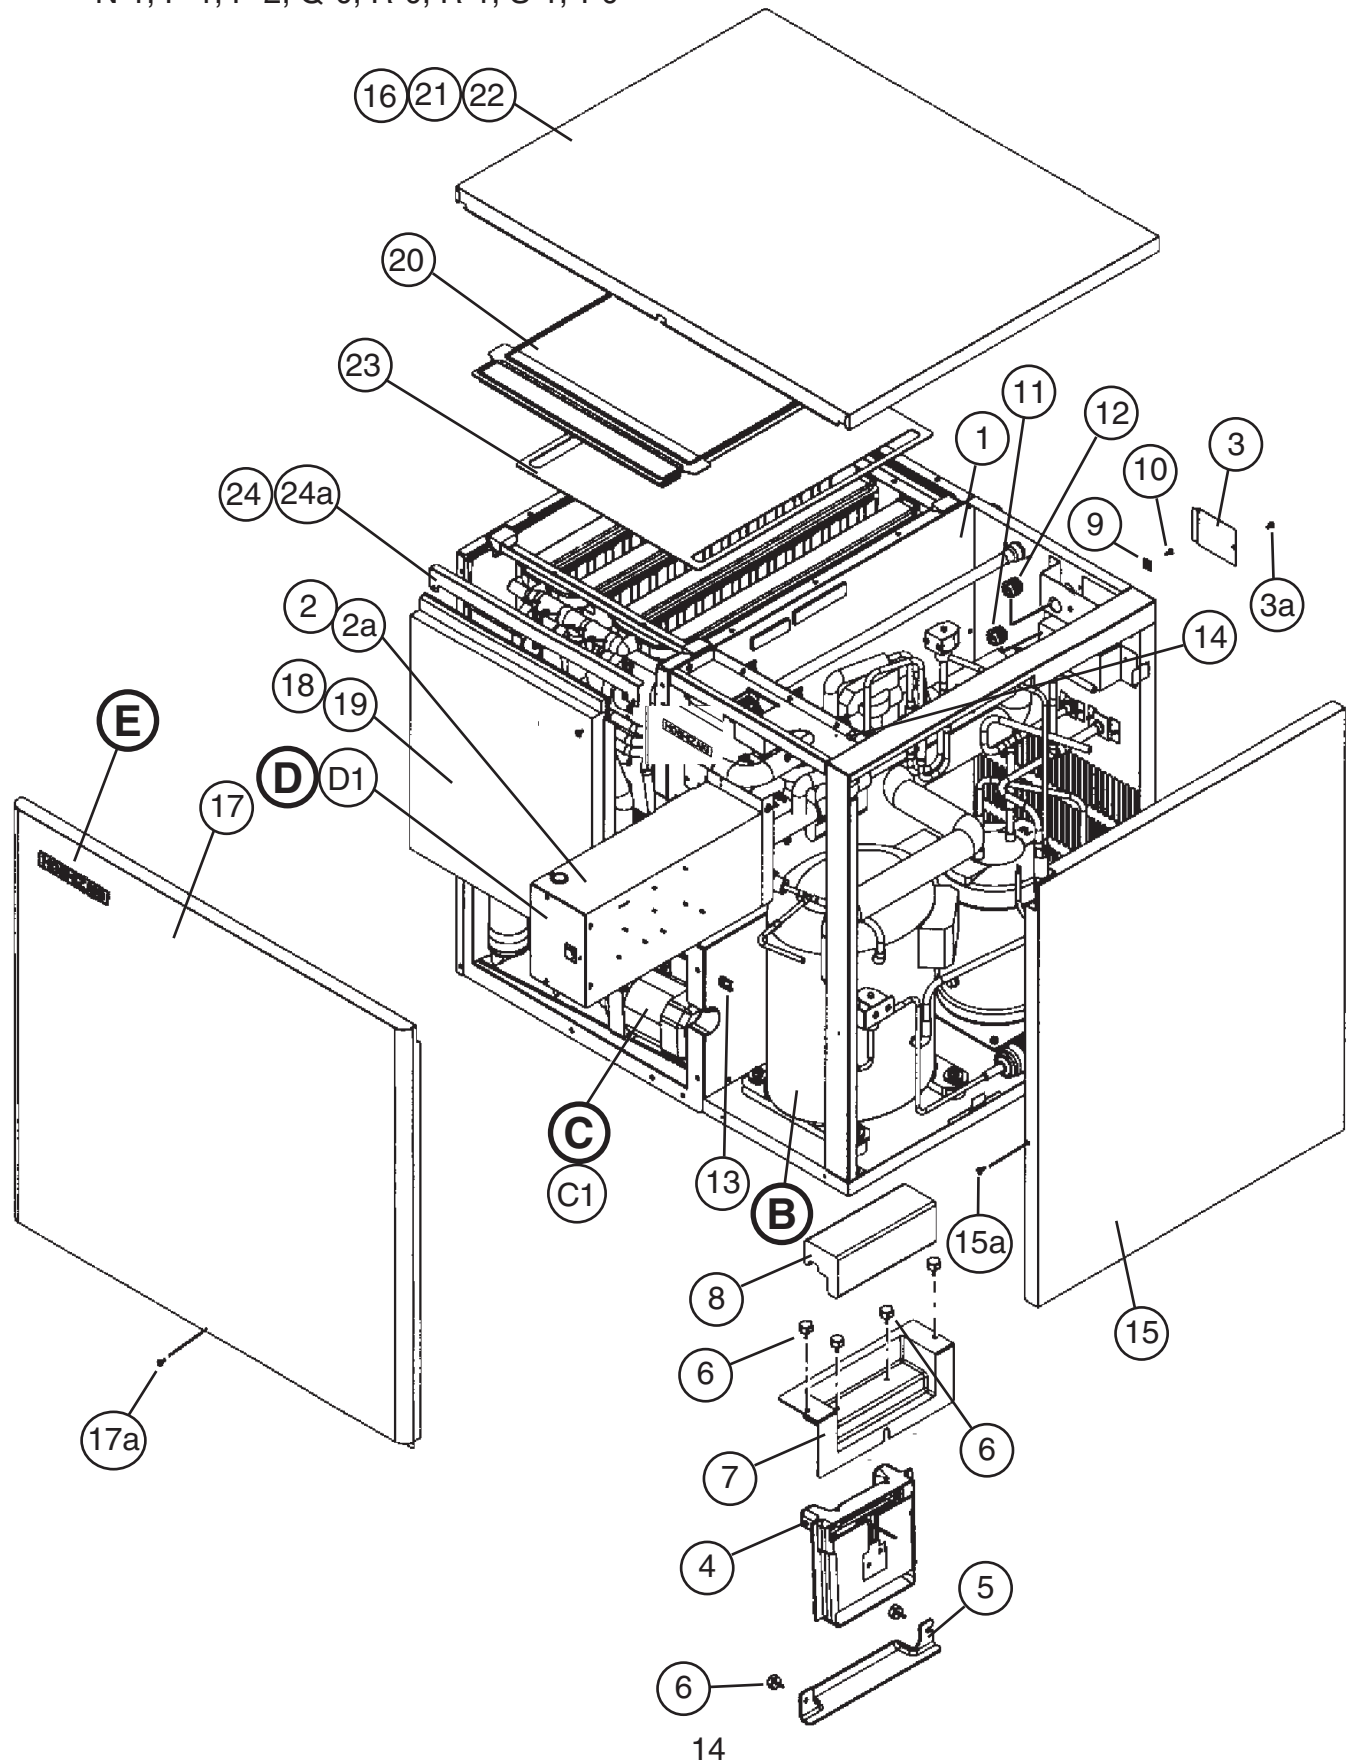


Title: A. Ice Cuber Assembly Model: KMD-700MRH											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0	N-1 P-1	P-2 to Q-0	R-0 to T-0				
B	Refrigeration Circuit	-	1A0801A01	1	-						
			1A0900A01		1	1	1				
C	Water Circuit	-	1A0800A01	1	-						
			1A0800A02		1	-					
			1A0800A03			1	1				
C1	Truss Head Screw	4x8, SS	7C32-0408	1	1	1	1				
D	Control Box Assembly	-	2A2818A01	1	1	-					
			2A3051A01			1	1				
D1	T2 Screw	4x8	7P31-0408	1	1	3	3				
E	Label Location	-	2A2765A01	1	1	1	1				
1	Evaporator Case	-	1A0790G03	1	-						
			1A0857G03		1	-					
			1A0857G01			1	1				
2	Control Box Cover	GS	3A2687G01	1	1	-					
			3A2371-01			1	1				
2a	T2 Screw	4x8	7P31-0408	3	3	3	3				
3	Junction Box Cover	GS	433410-01	1	1	1	1				
3a	T2 Screw	4x8	7P31-0408	2	2	2	2				
4	Bin Control	-	464574-01	1	1	1	1				
5	Switch Guide	-	3A2643-01	1	1	1	1				
6	Thumbscrew	-	415949G10	6	6	6	6				
7	Switch Cover	-	3A2642-01	1	1	1	1				
8	Insulation Switch	-	4A3068-01	1	1	1	1				
9	Square Washer	-	433537-01	1	-						
			433537-02		1	1	1				
10	Screw – Grounding	-	433304-02	1	1	1	1				
11	Bushing	SR-34-2	420472-05	1	1	1	1				
12	Bushing	SR-30-1	420472-03	1	1	1	1				
13	Wire Saddle	VS-4238-M	4A0338-02	9	9	9	9				
14	Bushing	OCB-500	428394-02	1	1	1	1				
15	Side Panel (R)	SS	2A2800G01	1	1	1	1				
15a	Truss Head Screw	4x8, SS	7C32-0408	1	1	1	1				
16	Top Panel	SS	2A2801-01	1	-						
	Top Panel Assembly		2A2955G01		1	1	1				
17	Front Panel	SS	2A2802-02	1	-						
	Front Panel Assembly		2A2956G01		1	1	1				
17a	Truss Head Screw	4x10, SS	7C32-0410	1	1	1	1				
18	Front Insulation	-	3A2722G01	1	-						
			3A2933G01		1	1	1				
19	Thumbscrew	-	415949G01	1	1	1	1				
20	Top Insulation	-	3A2723G01	1	-						
			3A2934G01		1	1	1				
21	Top Panel Insulation (B2)	-	3A2928-02	-	1	1	1				
22	Top Panel Insulation (B3)	-	3A2928-03	-	1	1	1				

Title: A. Ice Cuber Assembly Model: KMD-700MRH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0	N-1 P-1	P-2 to Q-0	R-0 to T-0					
23	Top Cover	ABS	3A2922-01	-	1	1	1					
24	Front Insulation Bracket	GS	3A2909-01	-	1	1	1					
24a	T2 Screw	4x8, SS	7P32-0408	-	2	2	2					
25	Bushing	OCB-875	428394-04	2	2	-						

B. Refrigeration Circuit
KMD-700MAH
1/2
N-0

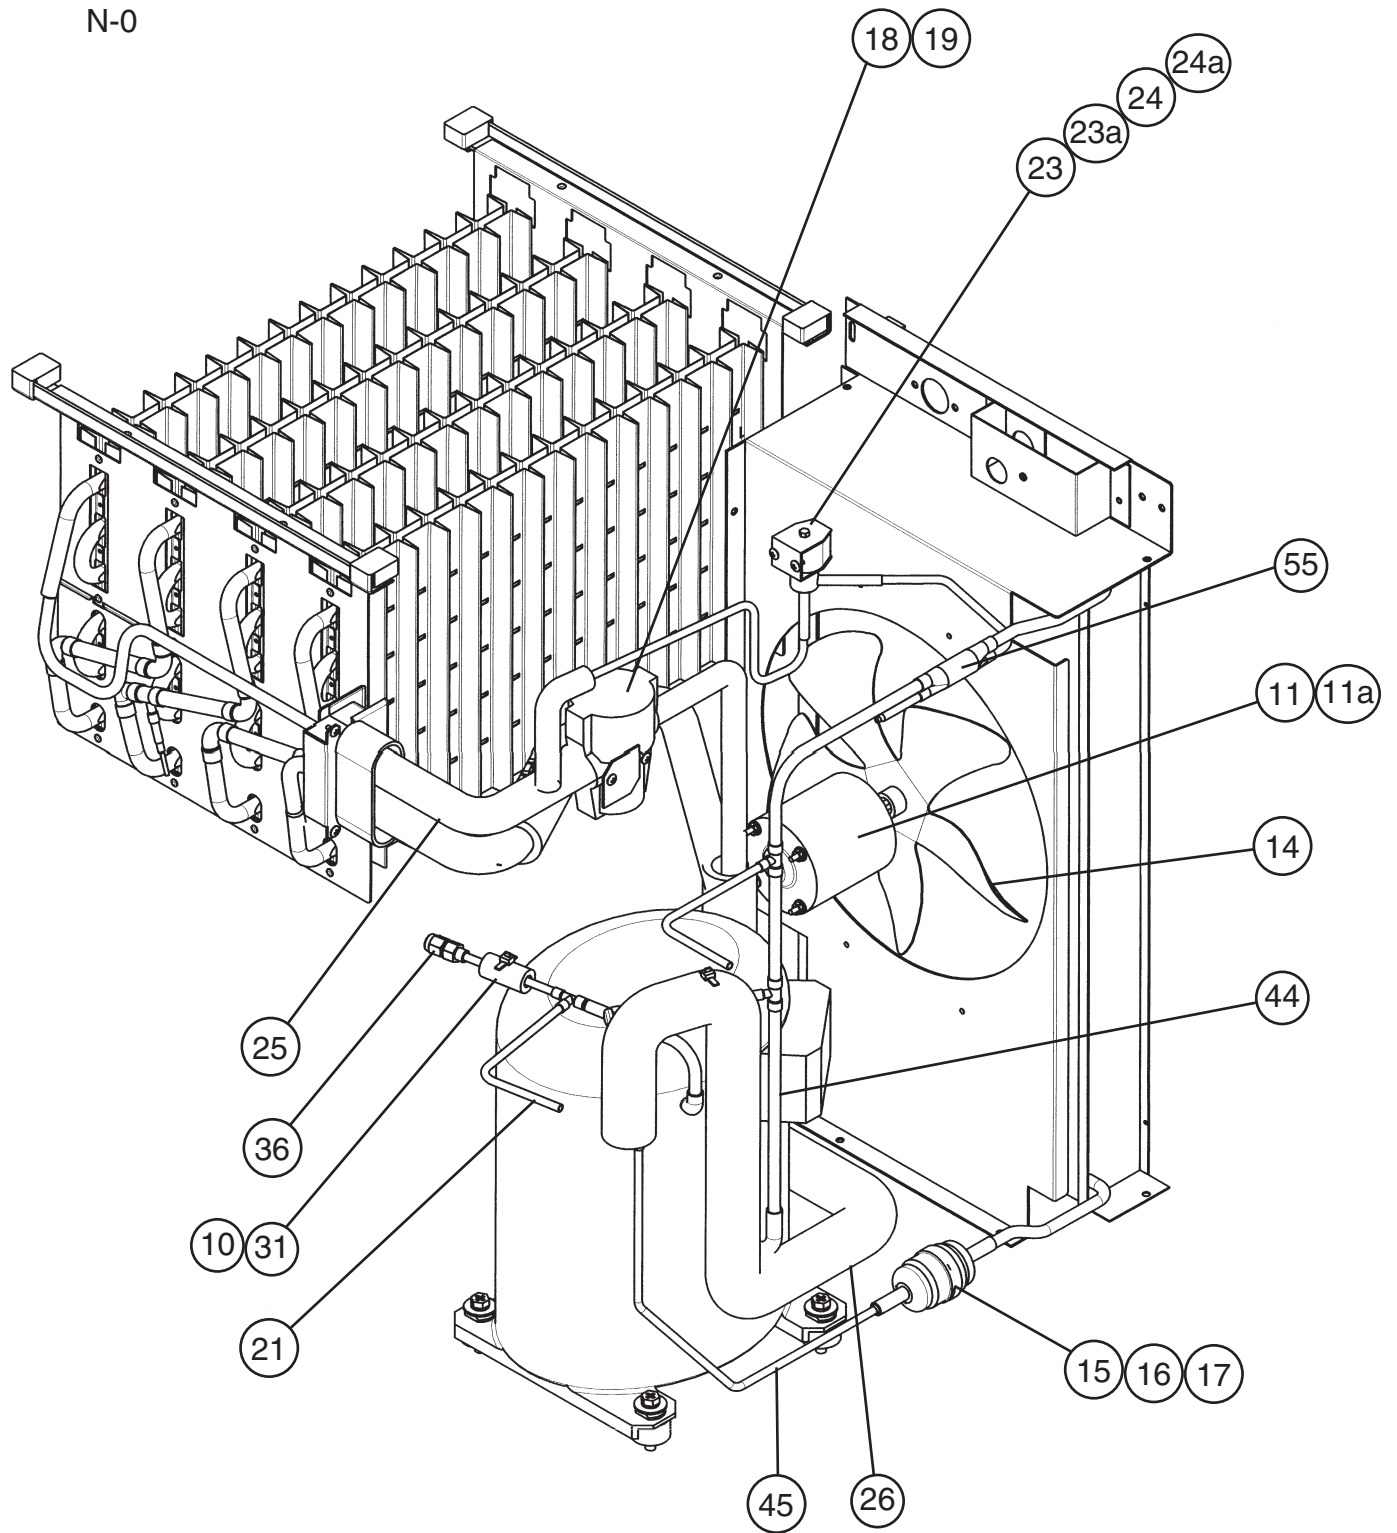

B. Refrigeration Circuit
KMD-700MAH
2/2
N-0

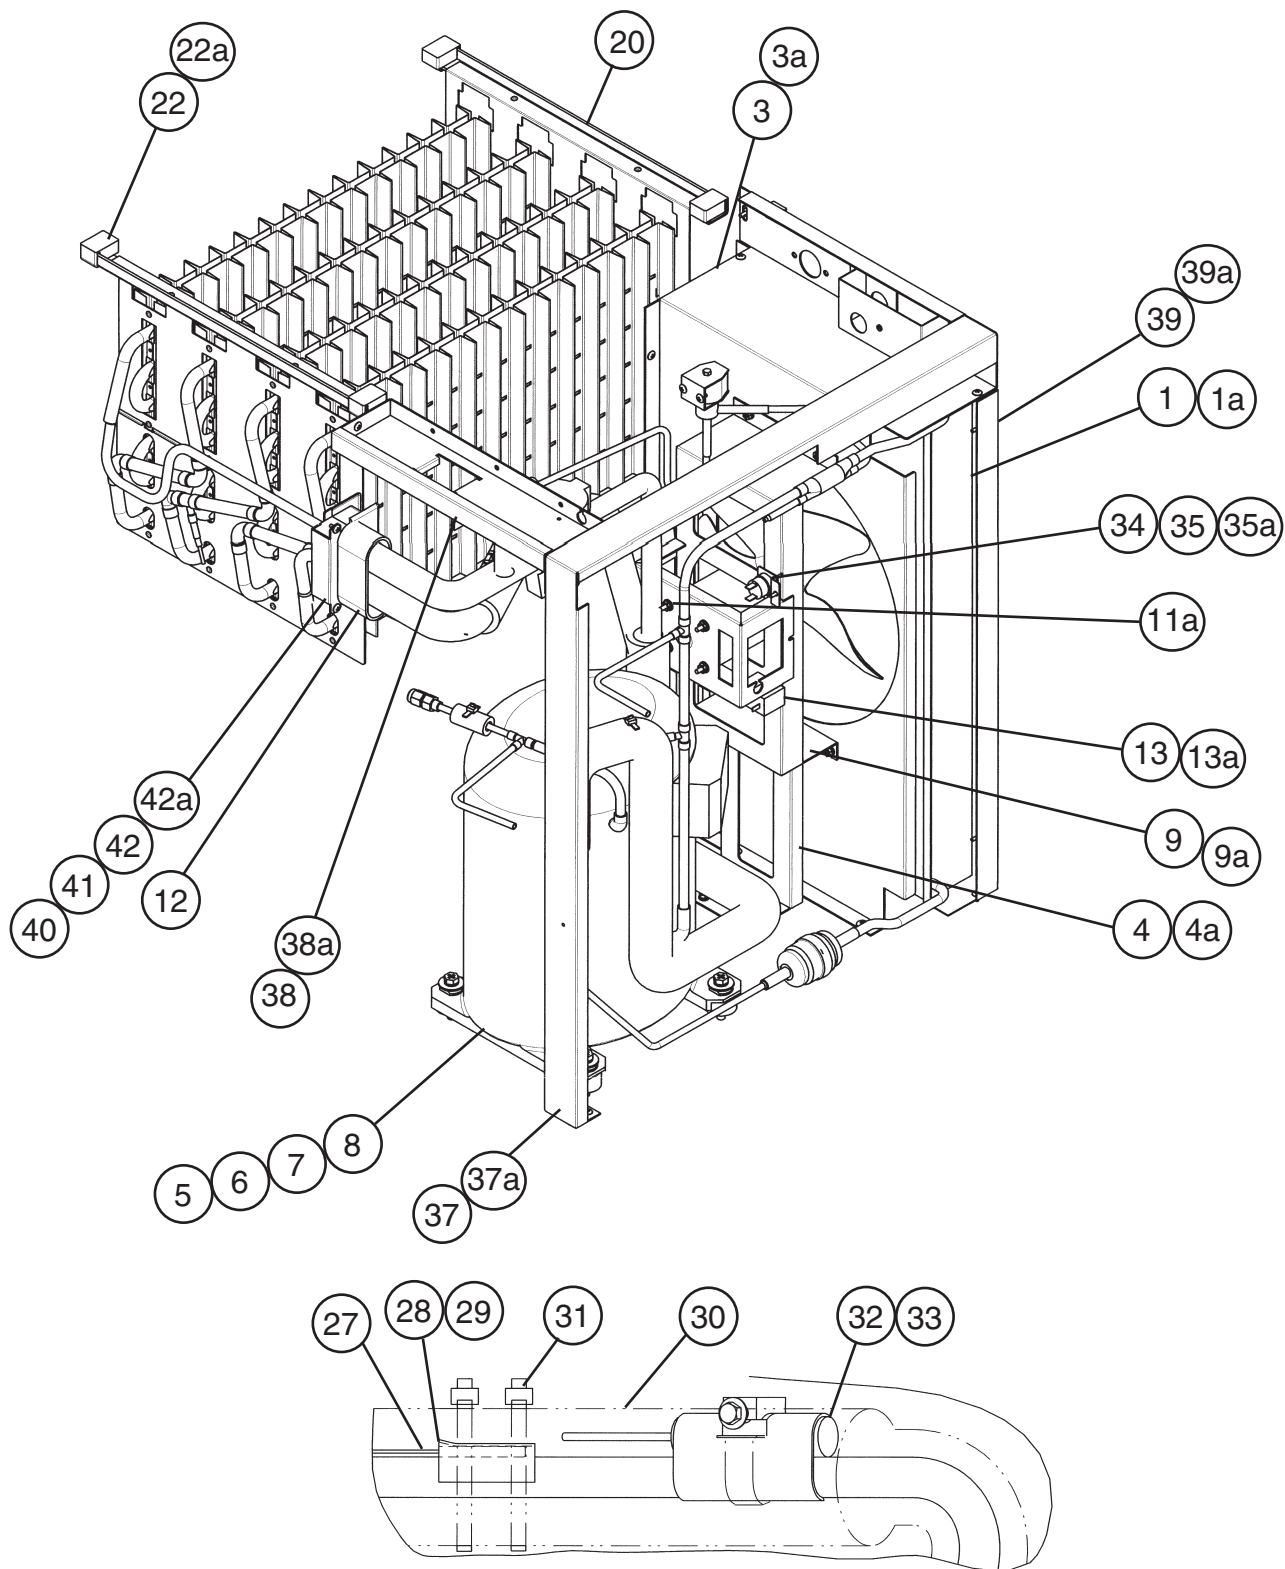




DETAILED THERMISTOR ATTACHMENT

B. Refrigeration Circuit

KMD-700MAH

1/2

N-1, P-0, P-2, P-3, Q-0, R-0, R-1, S-1, T-0

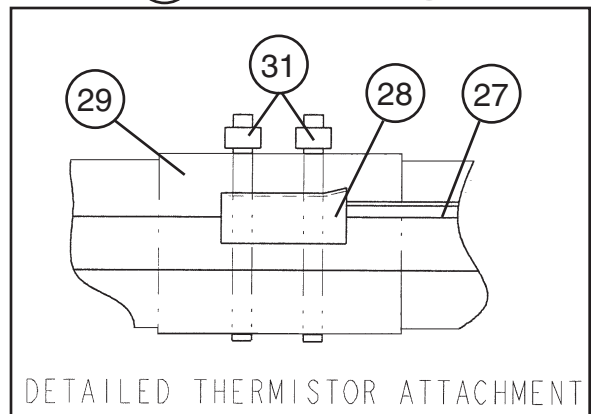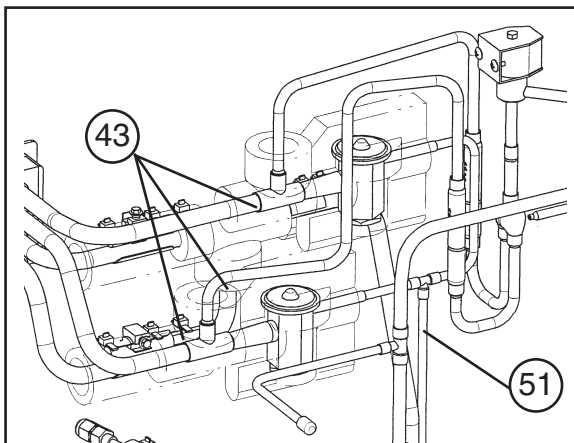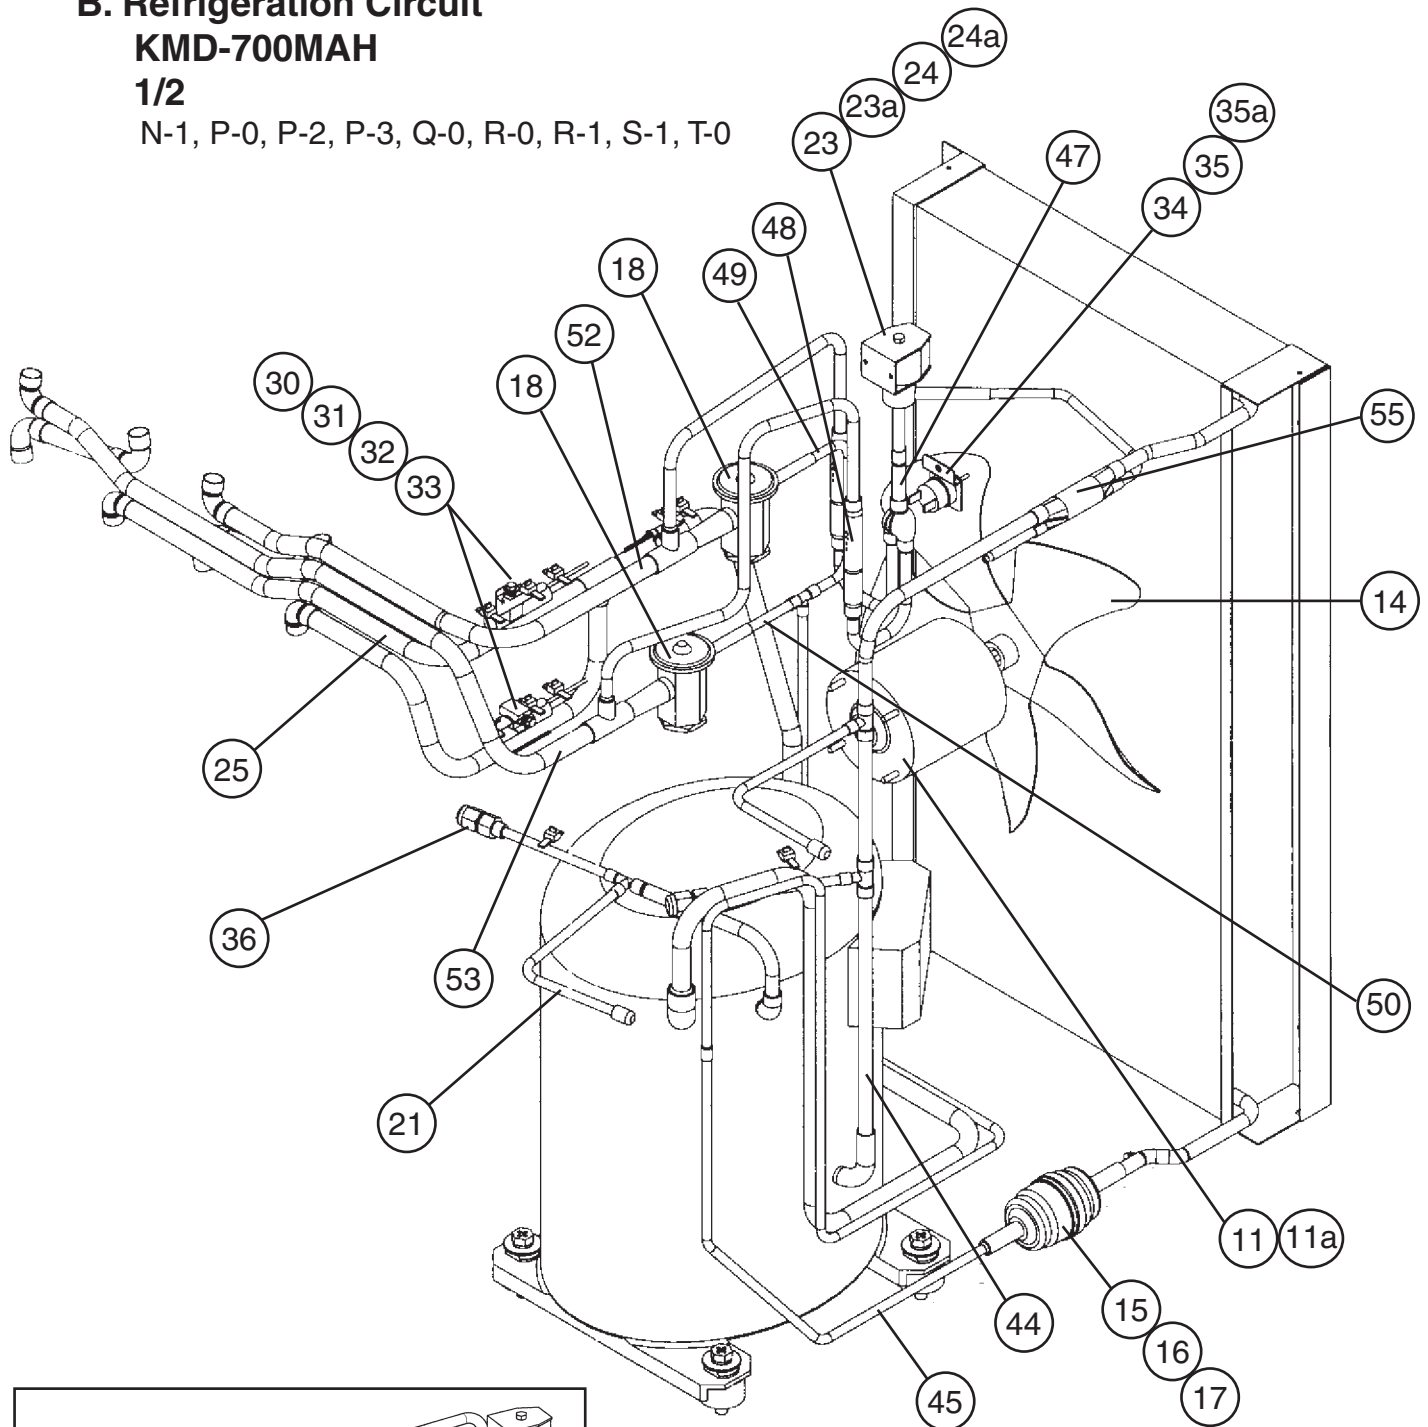


B. Refrigeration Circuit

KMD-700MAH

2/2

N-1, P-0, P-2, P-3, Q-0, R-0, R-1, S-1, T-0

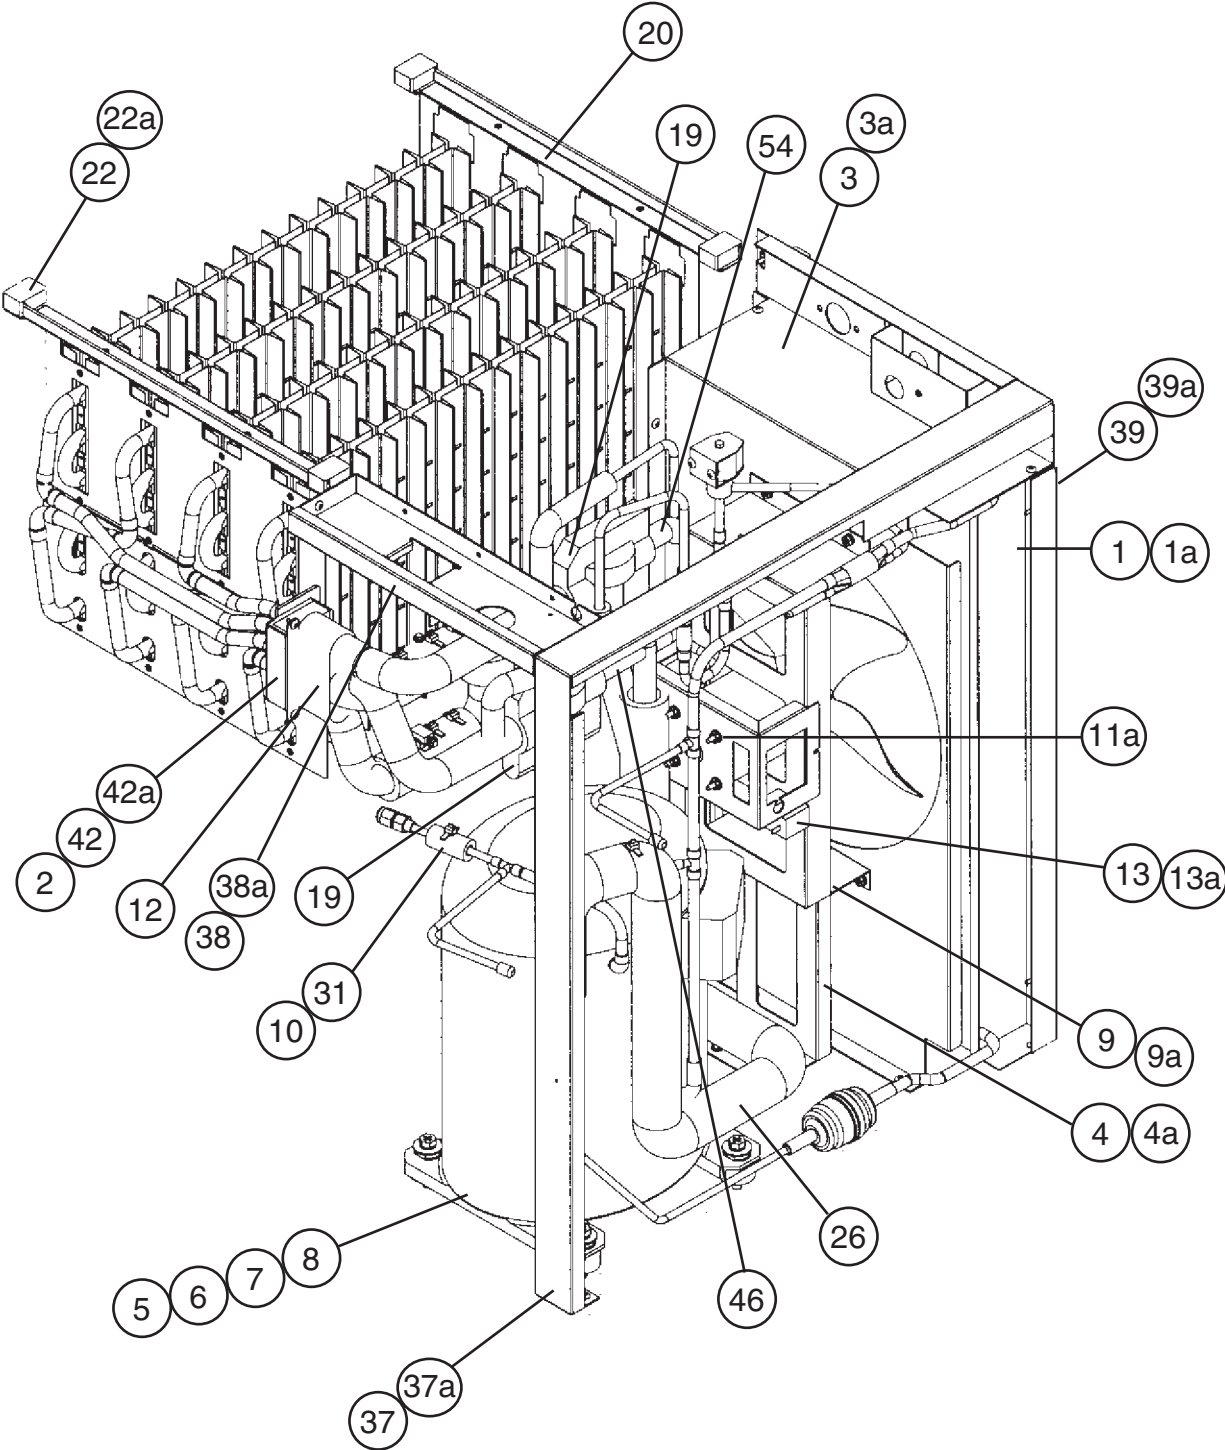


Title: **B. Refrigeration Circuit** Model: **KMD-700MAH**

Index No.	Description	Material or Model Number	Part Number	Required Number										
				N-0	N-1 P-0	P-2	P-3 Q-0	R-0 R-1	S-1 T-0					
1	Condenser	-	1A0802-01	1	1	1	1	1	1					
1a	T2 Screw	4x8	7P31-0408	3	3	3	3	3	3					
2	Insulated Rubber Tube	-	323975G01	-	1	1	1	1	1					
3	Shroud	-	3A2689G01	1	1	1	1	1	1					
3a	T2 Screw	4x8	7P31-0408	5	5	5	5	5	5					
4	Fan Motor Bracket (B)	GS	3A2789-01	1	1	1	1	1	1					
4a	Hex Head Bolt w/ Washer (LF)	5x10	7B0130510	4	4	4	4	4	4					
5	Compressor	CS10K6E-PFV-237	4A1539-01	1	1	1	1	1	1					
6	Bolt	8x45	437889-01	4	4	4	4	4	4					
7	Grommet	027-0167-00	434922-01	4	4	4	4	4	4					
8	Spacer	028-0188-02	434921-01	4	4	4	4	4	4					
9	Fan Motor Bracket	GS	3A2690G01	1	1	1	1	1	1					
9a	Hex Head Bolt w/ Washer (LF)	5x10	7B0130510	4	4	4	4	4	4					
10	Insulation Tube	L=40	7762-1020	1	1	1	1	1	1					
11	Fan Motor	U90 B1 7190 1031	440911-01	1	1	1	-							
		5KCP84DFK148S	4A3158-01				1	1	1					
11a	Self Locking Nut	No. 8-32	7N21I0832	4	4	4	4	4	4					
12	Insulation	-	436671-01	1	1	1	1	1	1					
13	Capacitor	5 MFD 250 VAC	443192-02	1	1	1	1	1	1					
13a	T2 Screw	4x8	7P31-0408	1	1	1	1	1	1					
14	Fan Blade	20569-17	4A0197-01	1	1	1	1	1	1					
15	Drier	-	4A2666-01	1	1	1	1	1	1					
16	End Cap	-	4A1413F01	2	2	2	2	2	2					
17	Nylon Tie	PLWP3H-TL	8911-0301	1	1	1	1	1	1					
18	Expansion Valve	-	4A2053-01	1	-									
			4A1870-01		2	2	2	2	2					
19	Expansion Valve Cover	-	4A1168-01	1	2	2	2	2	2					
20	Evaporator	-	2A2834G01	1	-									
			2A2781G01		1	1	1	1	1					
21	Copper Tube – Access Valve	-	3A2698G01	1	1	1	1	1	1					
22	Frame Seal	EPDM	323925-01	4	4	4	4	4	4					
22a	Truss Head Screw	4x8, SS	7C32-0408	4	4	4	4	4	4					
23	Valve Body	70	440352-01	1	1	1	1	-						
			4A3978-01					1	1					
23a	Bolt	-	440353F01	1	1	1	1	-						
			4A3277F01					1	1					
24	Coil - Valve	ABS-25-1- HD-2	440353-01	1	1	1	1	-						
		-	4A3277-01					1	1					
24a	Truss Head Screw	4x8	7C31-0408	2	2	2	2	2	2					
25	Copper Tube (A) Low Side	CU	3A2697G01	1	-									
			3A3010G01		1	1	1	1	1					
26	Heat Exchanger	-	3A2696G01	1	-									
			3A3009G01		1	1	1	1	1					



Title: **B. Refrigeration Circuit** Model: **KMD-700MAH**

Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0	N-1 P-0	P-2	P-3 Q-0	R-0 R-1	S-1 T-0		
27	Thermistor	-	429006-04	1	-						
			429006-05		1	-					
			429006-03			1	1	1	1		
28	Holder – Thermistor	CU	438247-01	1	1	1	1	1	1		
29	Insulation – Thermistor	PE FOAM	427441-01	1	1	1	1	1	1		
30	Insulation – Tube	L=200	7762-2943	1	-						
		L=110			2	2	2	2	2		
31	Cable Tie	-	7920-0010	4	10	10	10	10	10		
32	Holder – Expansion Valve	-	3A0112-01	1	2	2	2	2	2		
33	Clamp	-	443461-02	1	2	2	2	2	2		
34	Pressure Switch	ACB-1UB09	433441-07	1	1	1	1	1	1		
35	Pressure Switch Bracket	GS	434938-01	1	1	1	1	1	1		
35a	T2 Screw	4x8	7P31-0408	1	1	1	1	1	1		
36	Access Valve	-	457729-01	2	2	2	2	2	2		
37	Side Frame	GS	3A2691G01	1	1	1	1	1	1		
37a	Truss Head Screw	4x8	7C31-0408	6	6	6	6	6	6		
38	Front Frame	GS	3A2692-01	1	1	1	1	1	1		
38a	T2 Screw	4x8	7P31-0408	4	4	4	4	4	4		
39	Barrier	GS	3A2693-01	1	1	1	1	1	1		
39a	T2 Screw	4x8	7P31-0408	2	2	2	2	2	2		
40	Rubber Insulation (A)	-	3A2649-01	1	-						
41	Rubber Insulation (B)	-	3A2650-01	1	-						
42	Insulation Holder	SS	4A3043-01	1	1	1	1	1	-		
			3A0979-01						1		
42a	T2 Screw	4x8, SS	7P32-0408	2	2	2	2	2	2		
43	Connection Tee Cover	-	4A1379-01		3	3	3	3	3		
44	Copper Tube (A) High Side (includes Stainer, item 55)	CU	3A2694G01	1	1	1	1	1	1		
45	Copper Tube (B) High Side	CU	3A2695-01	1	1	1	1	1	1		
46	Insulation Tube	L=88	7762-1020		1	1	1	1	1		
47	Check Valve Assembly	-	3A3013G01		1	1	1	1	1		
48	Check Valve	SKC31220	4A2054-01		2	2	2	2	2		
49	Copper Tube (B) Heat Exchanger	-	4A3292-01		1	1	1	1	1		
50	Copper Tube (A) Heat Exchanger	-	4A3293-01		1	1	1	1	1		
51	Tee	-	436000-01		1	1	1	1	1		
52	Copper Tube (B) - Low Side	-	3A3011G01		1	1	1	1	1		
53	Copper Tube (C) - Low Side	-	3A3012G01		1	1	1	1	1		
54	Insulation Tube	L=220	7762-1020		1	1	1	1	1		
55	Strainer (included in item 44, Copper Tube (A) High Side)	-	4A0397-01	1	1	1	1	1	1		

B. Refrigeration Circuit
KMD-700MWH
1/2
N-0

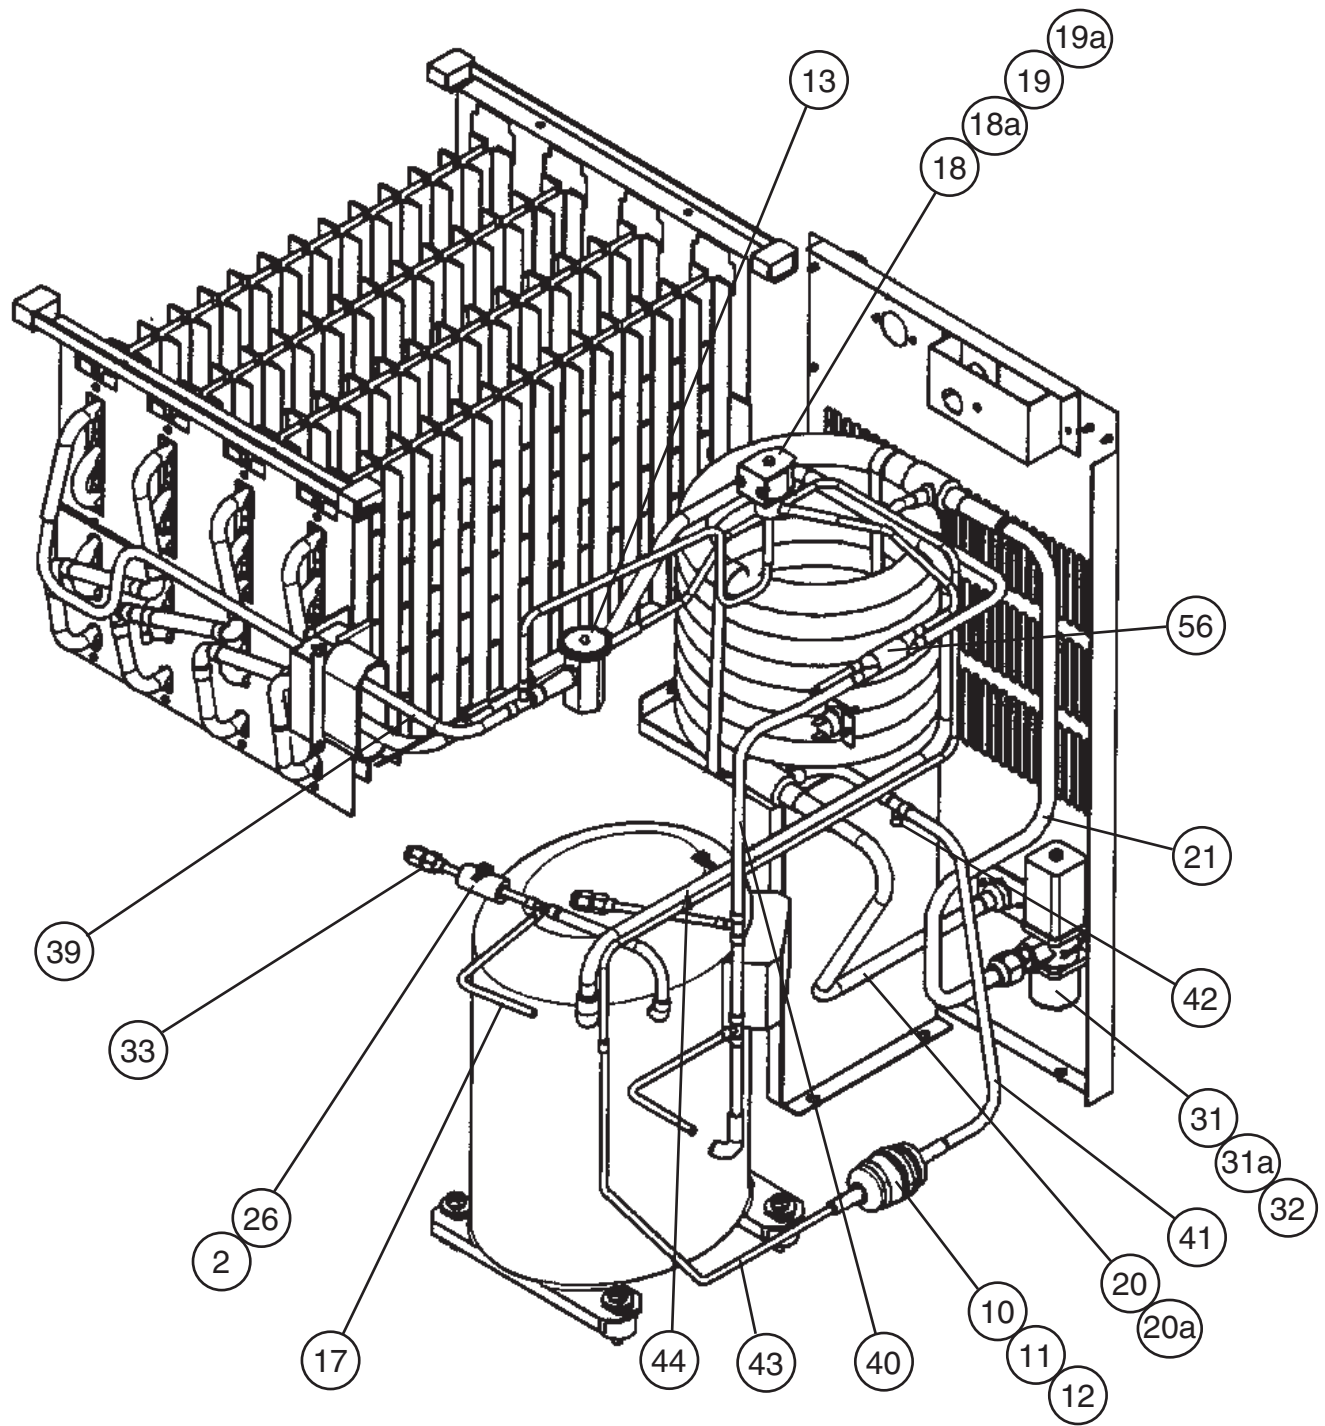

B. Refrigeration Circuit
KMD-700MWH
 2/2
 N-0

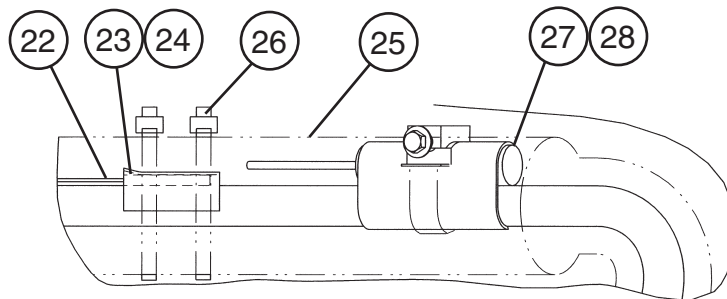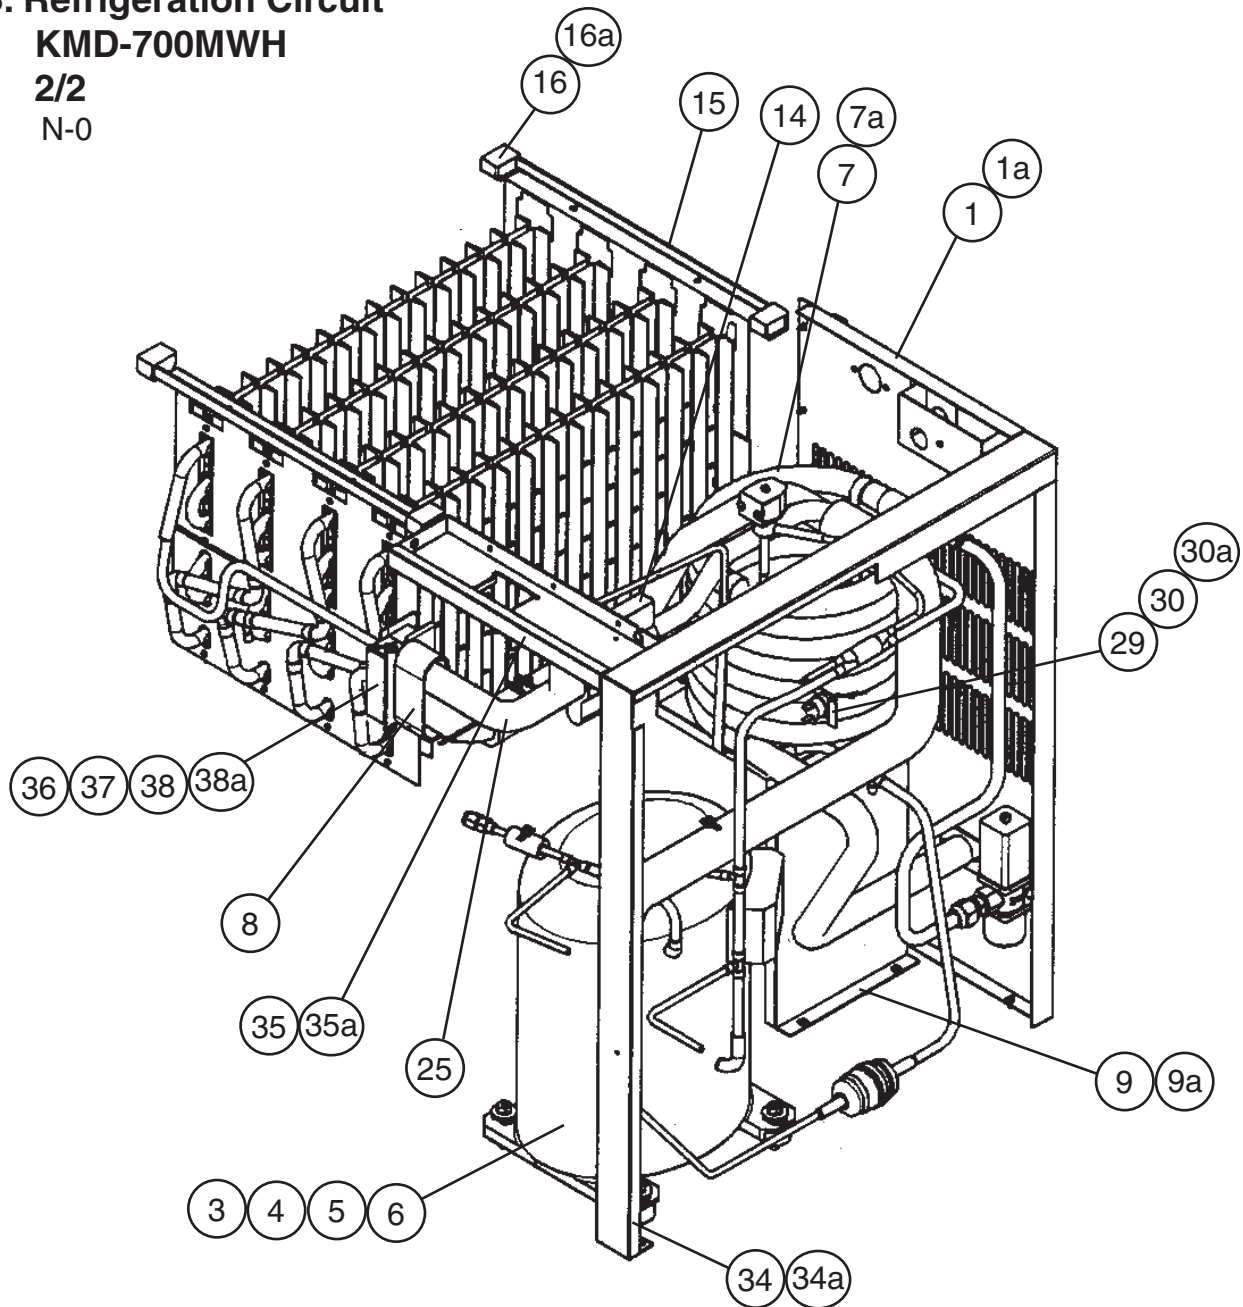



Detailed Thermistor Attachment

B. Refrigeration Circuit

KMD-700MWH

1/2

N-1, P-2, Q-0, R-0, R-1, S-1, T-0

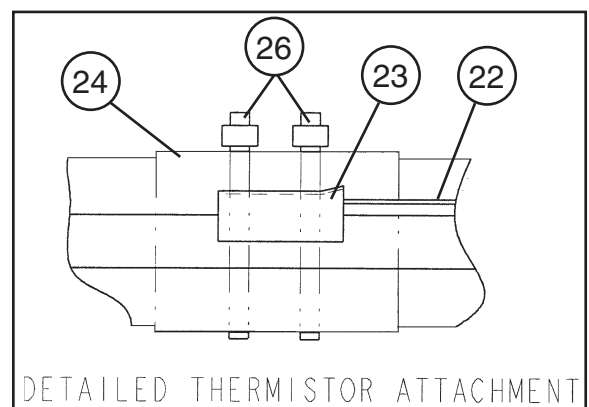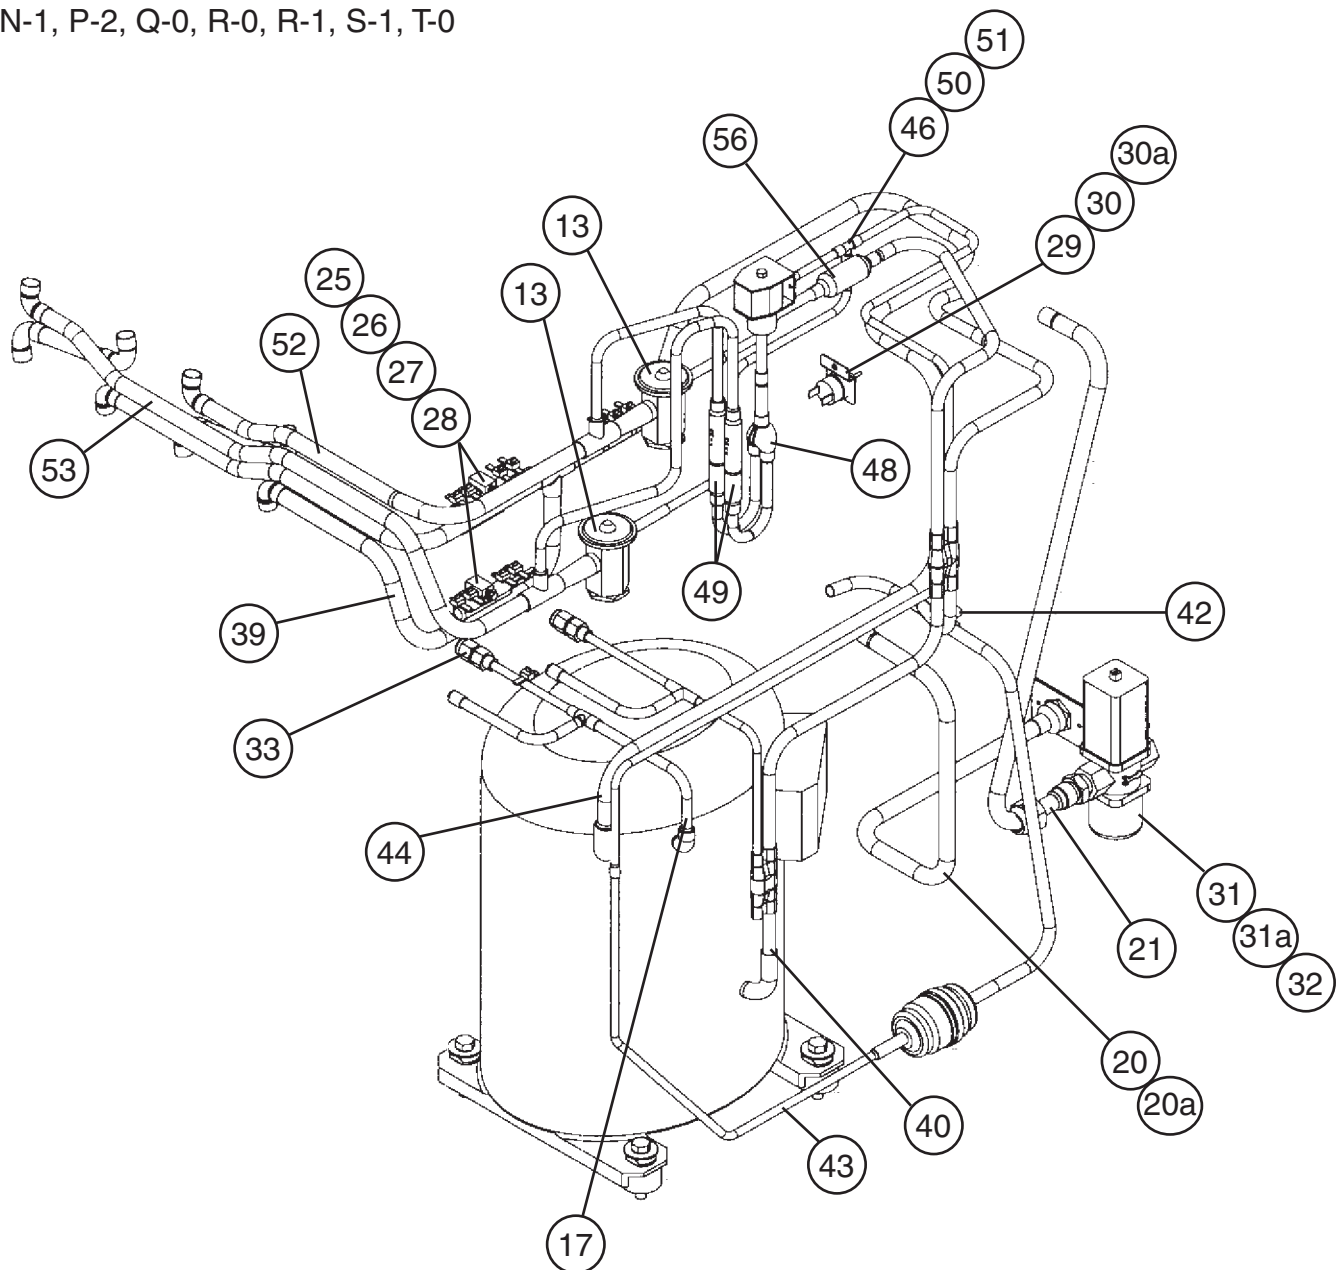


B. Refrigeration Circuit

KMD-700MWH

2/2

N-1, P-2, Q-0, R-0, R-1, S-1, T-0

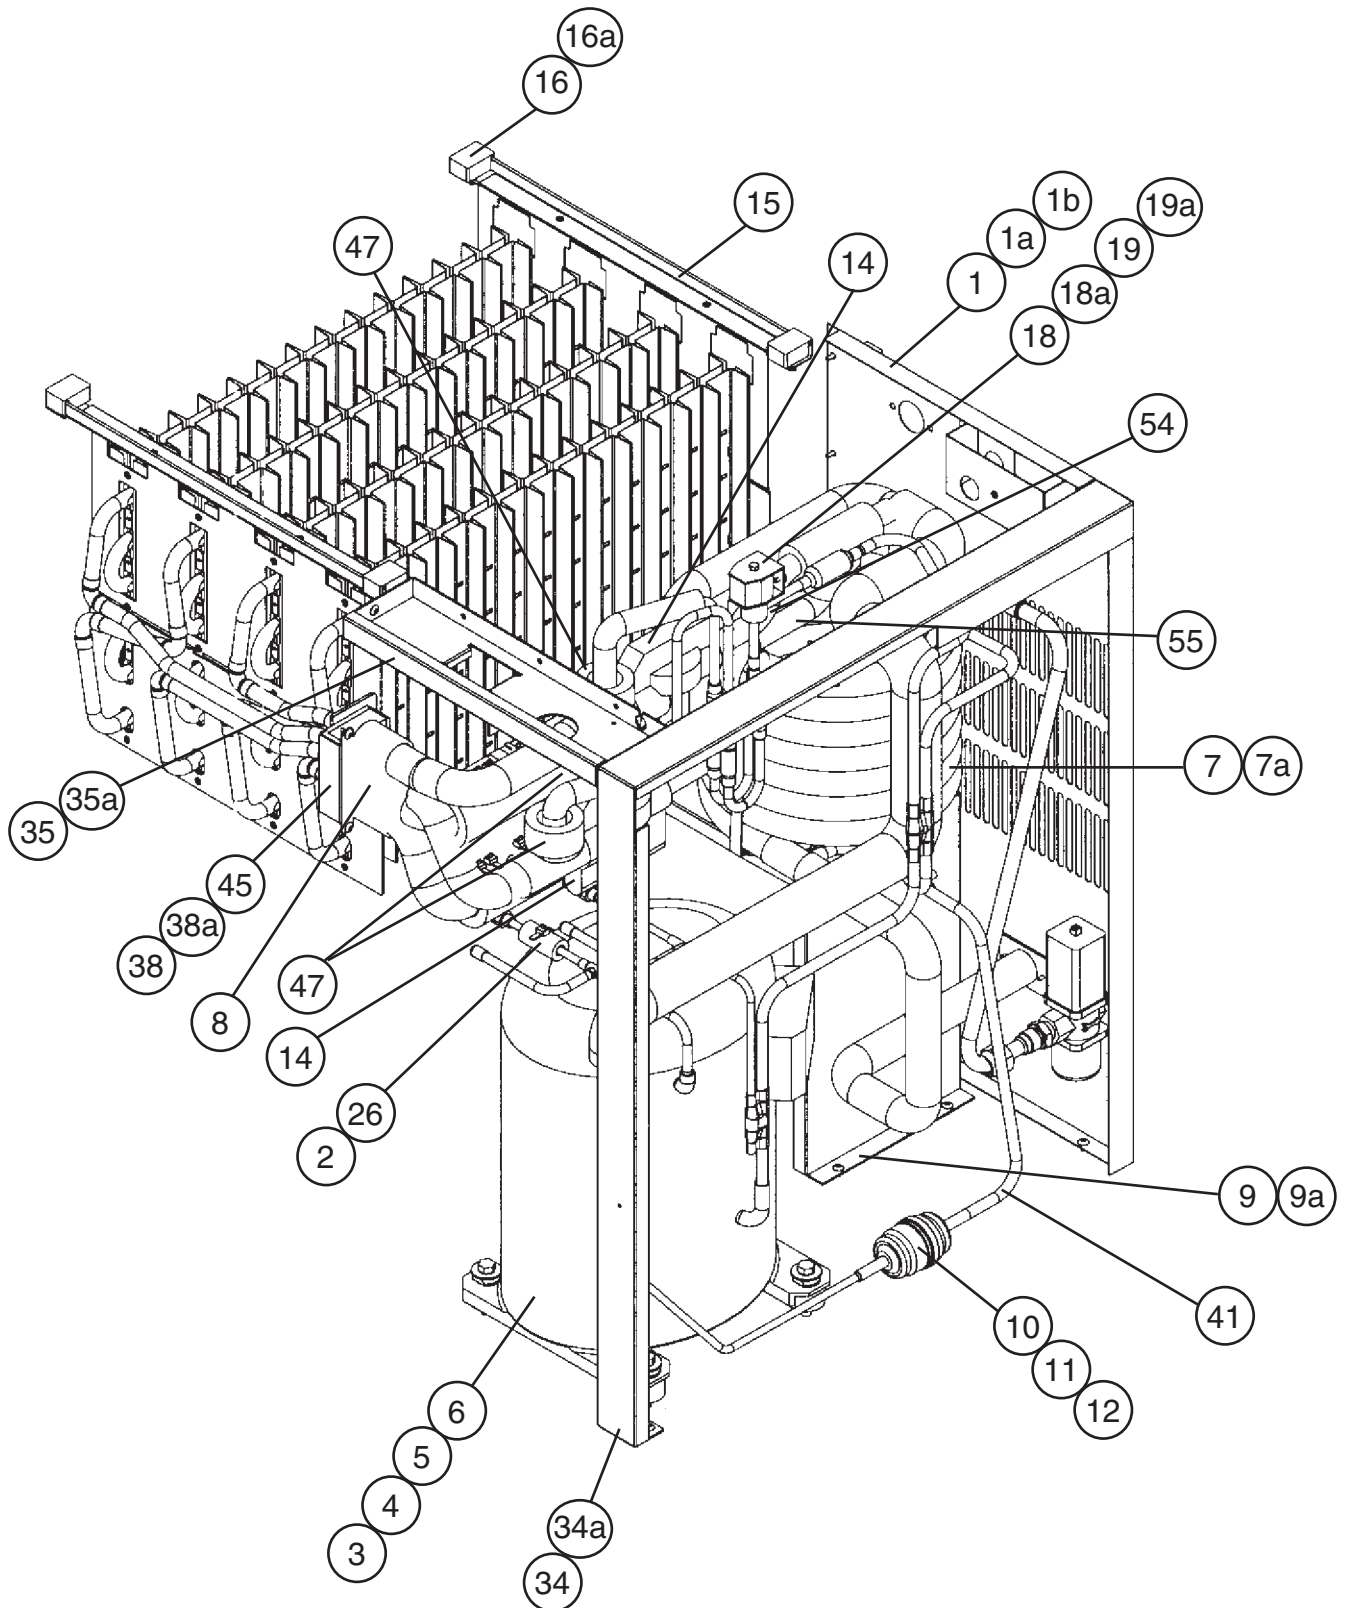


Title: B. Refrigeration Circuit Model: KMD-700MWH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0	N-1	P-2 Q-0	R-0 R-1	S-1 T-0				
1	Rear Panel	GS	3A2758G01	1	1	1	1	1				
1a	T2 Screw	4x8	7P31-0408	5	5	5	5	5				
1b	Truss Head Screw	4x8	7C31-0408		2	2	2	2				
2	Insulation Tube	L=40	7762-1020	1	1	1	1	1				
3	Compressor	CS10K6E-PFV-237	4A1539-01	1	1	1	1	1				
4	Bolt	8x45	437889-01	4	4	4	4	4				
5	Grommet	027-0167-00	434922-01	4	4	4	4	4				
6	Spacer	028-0188-02	434921-01	4	4	4	4	4				
7	Condenser – Water Cooled	HS-0162	2A2359G03	1	1	1	1	1				
7a	Hex Head Bolt w/Washer (LF)	5x10	7B0130510	2	-							
		5x12	7B0130512		2	2	2	2				
8	Insulation	-	436671-01	1	1	1	1	1				
9	Condenser – Bracket	GS	2A2846-01	1	1	1	1	1				
9a	Truss Head Screw	4x8	7C31-0408	4	-							
	T2 Screw		7P31-0408		4	4	4	4				
10	Drier	-	4A2666-01	1	1	1	1	1				
11	End Cap	-	4A2666F01	2	2	2	2	2				
12	Nylon Tie	PLWP3H-TL	8911-0301	1	1	1	1	1				
13	Expansion Valve	-	4A2053-01	1	-							
			4A1870-01		2	2	2	2				
14	Expansion Valve Cover	-	4A1168-01	1	2	2	2	2				
15	Evaporator	-	2A2834G01	1	-							
			2A2781G01		1	1	1	1				
16	Frame Seal	EPDM	323925-01	4	4	4	4	4				
16a	Truss Head Screw	4x12, SS	7C32-0412	4	4	4	4	4				
17	Copper Tube – Access Valve	-	3A2698G01	1	-							
			3A2734G01		1	1	1	1				
18	Valve Body	70	440352-01	1	1	1	-					
			4A3978-01				1	1				
18a	Bolt	-	440353F01	1	1	1	-					
			4A3277F01				1	1				
19	Coil – Valve	ABS-25-1-HD-2	440353-01	1	1	1	-					
		-	4A3277-01				1	1				
19a	Truss Head Screw	4x8	7C31-0408	2	2	2	2	2				
20	Copper Tube – Condenser Inlet	-	3A2769G01	1	-							
			3A2827G01		1	1	1	1				
20a	T2 Screw	4x8	7P31-0408	2	2	2	2	2				
21	Copper Tube – Condenser Outlet	-	4A3110G01	1	-							
			3A3045G01		1	1	1	1				
22	Thermistor	-	429006-05	1	1	-						
			429006-03			1	1	1				
23	Holder – Thermistor	CU	438247-01	1	1	1	1	1				
24	Insulation – Thermistor	PE FOAM	427441-01	1	1	1	1	1				


Title: **B. Refrigeration Circuit** Model: **KMD-700MWH**

Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0	N-1	P-2 Q-0	R-0 R-1	S-1 T-0			
25	Insulation – Tube	L=180	7762-2943	1	-						
			7762-3555		2	-					
		L=110	7762-3555			2	2	2			
26	Cable Tie	-	7920-0010	4	12	12	12	12			
27	Holder – Expansion Valve	-	3A0112-01	1	2	2	2	2			
28	Clamp	-	443461-02	1	2	2	2	2			
29	Pressure Switch	ACB-2UB04	433441-05	1	1	1	1	1			
30	Pressure Switch Bracket	GS	434938-01	1	1	1	1	1			
30a	T2 Screw	4x8	7P31-0408	1	1	1	1	1			
31	Water Regulator	-	4A0911-06	1	1	1	1	1			
31a	Truss Head Screw	4x6	7C31-0406	2	2	2	2	2			
32	Male Connector	-	4A1087-01	1	1	1	1	1			
33	Access Valve	-	457729-01	1	-						
34	Side Frame	GS	3A2691G01	1	1	1	1	1			
34a	Truss Head Screw	4x8	7C31-0408	2	2	2	2	2			
35	Front Frame	GS	3A2692-01	1	1	1	1	1			
35a	T2 Screw	4x8	7P31-0408	4	4	4	4	4			
36	Rubber Insulation (A)	-	3A2649-01	1	-						
37	Rubber Insulation (B)	-	3A2650-01	1	-						
38	Insulation Holder	SS	4A3043-01	1	1	1	1	-			
			3A0979-01					1			
38a	T2 Screw	4x8, SS	7P32-0408	2	2	2	2	2			
39	Copper Tube (A) Low Side	CU	3A2697G01	1	-						
			3A2804G01		1	1	1	1			
40	Copper Tube (A) High Side (includes Strainer, item 56)	CU	3A2760G01	1	-						
			3A3054G01		1	1	1	1			
41	Copper Tube (B) High Side	CU	3A2768-01	1	1	1	1	1			
42	Tee	-	436000-06	1	1	1	1	1			
43	Copper Tube (C) – High Side	CU	3A2762-01	1	-						
			3A3047-01		1	1	1	1			
44	Heat Exchanger	-	3A2766G01	1	-						
			2A3037G01		1	1	1	1			
45	Insulated Rubber Tube	-	323975G01		1	1	1	1			
46	Copper Tube (F) High Side	-	4A3342-01		1	1	1	1			
47	Connection Tee Cover	-	4A1379-01		3	3	3	3			
48	Check Valve Assembly	-	3A3071G01		1	1	1	1			
49	Check Valve	-	4A2054-01		2	2	2	2			
50	Copper Tube (D) High Side	-	4A3333-01		1	1	1	1			
51	Tee	-	436000-01		1	1	1	1			
52	Copper Tube (B) - Low Side	-	3A3050G01		1	1	1	1			
53	Copper Tube (C) - Low Side	-	3A3051G01		1	1	1	1			
54	Insulation Tube	L=505	7762-1020		1	-					
		L=270				1	1	1			
55	Insulation Tube	L=330	7762-1020		1	-					
		L=370				1	1	1			
56	Strainer (included in item 40, Copper Tube (A) High Side)	-	4A0397-01	1	1	1	1	1			

N-0

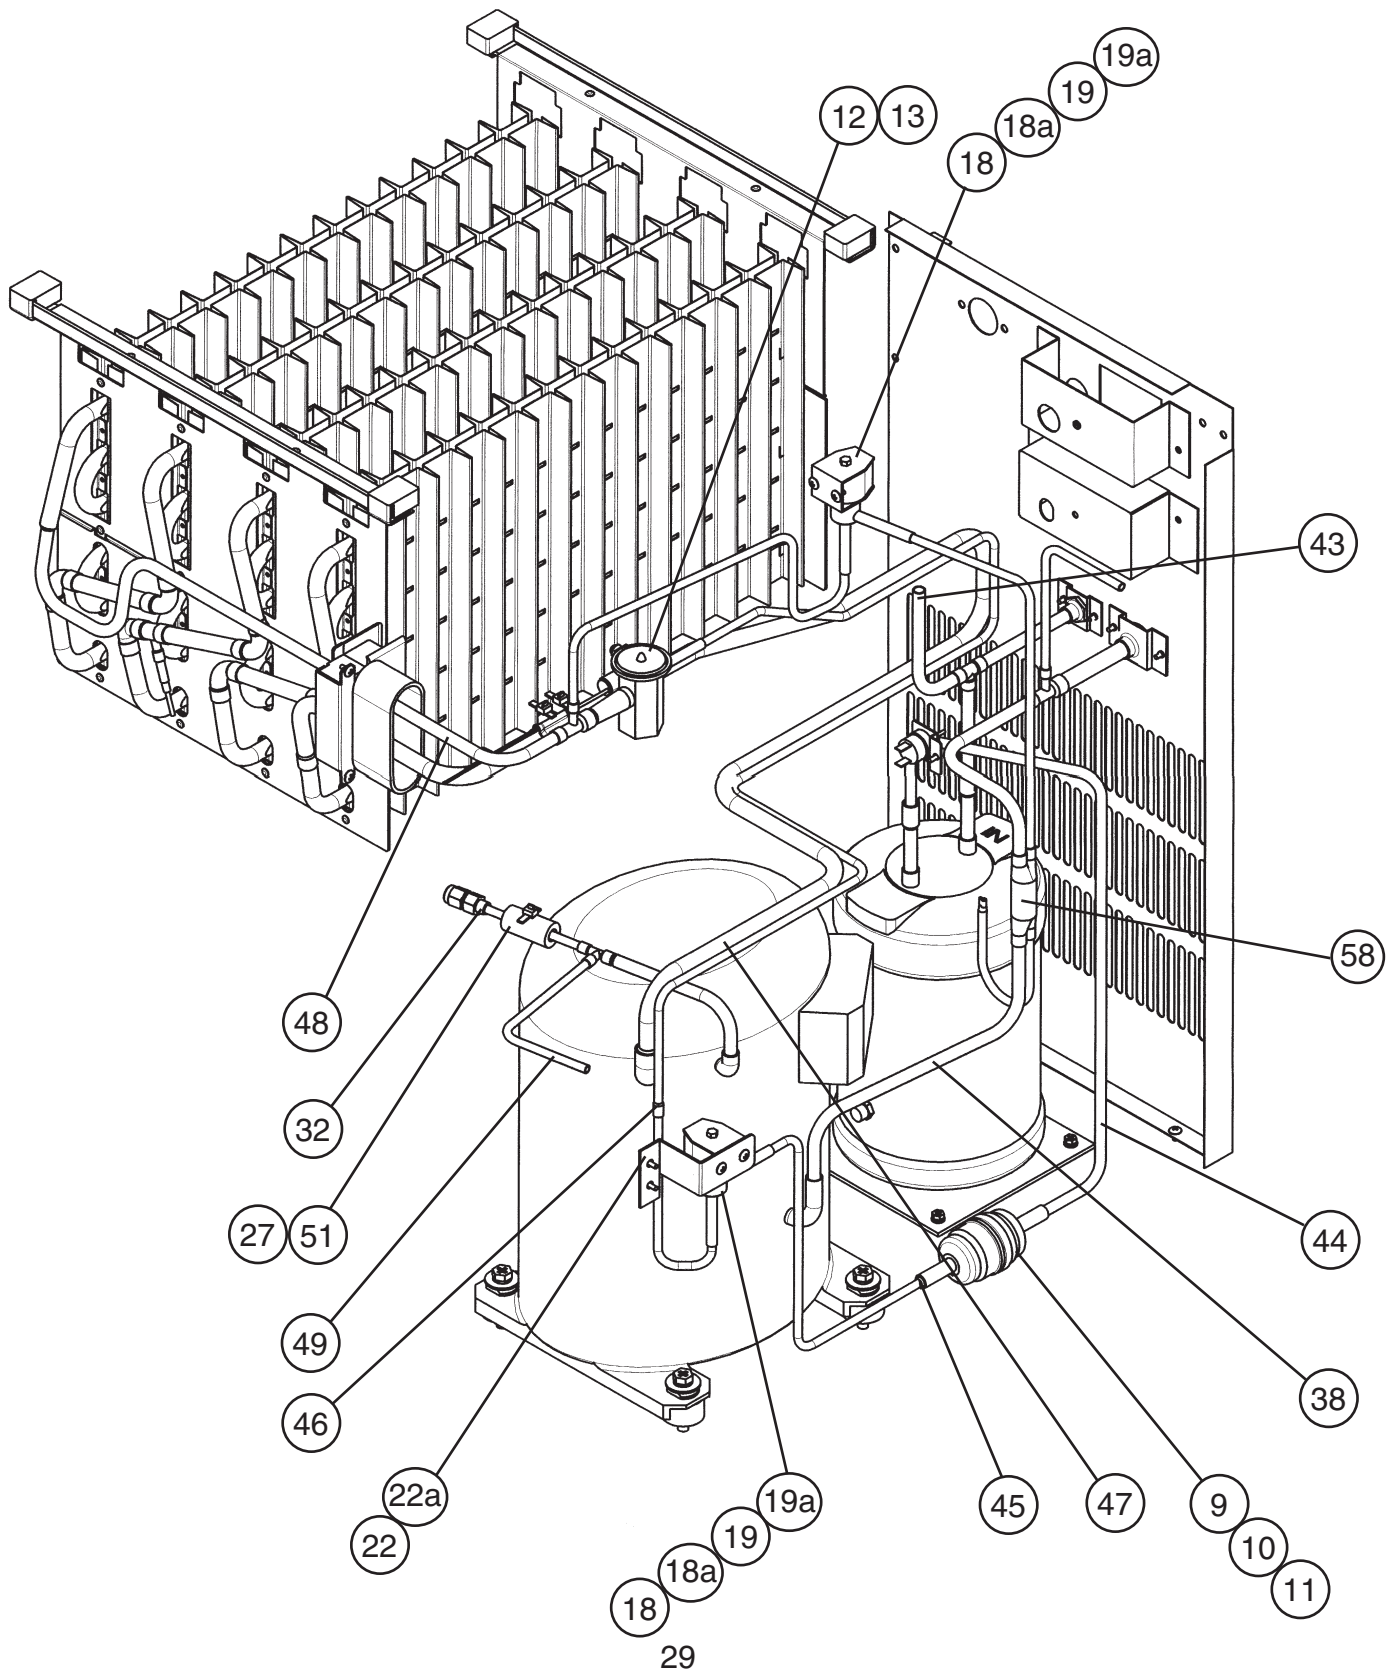


B. Refrigeration Circuit
KMD-700MRH
2/2
N-0

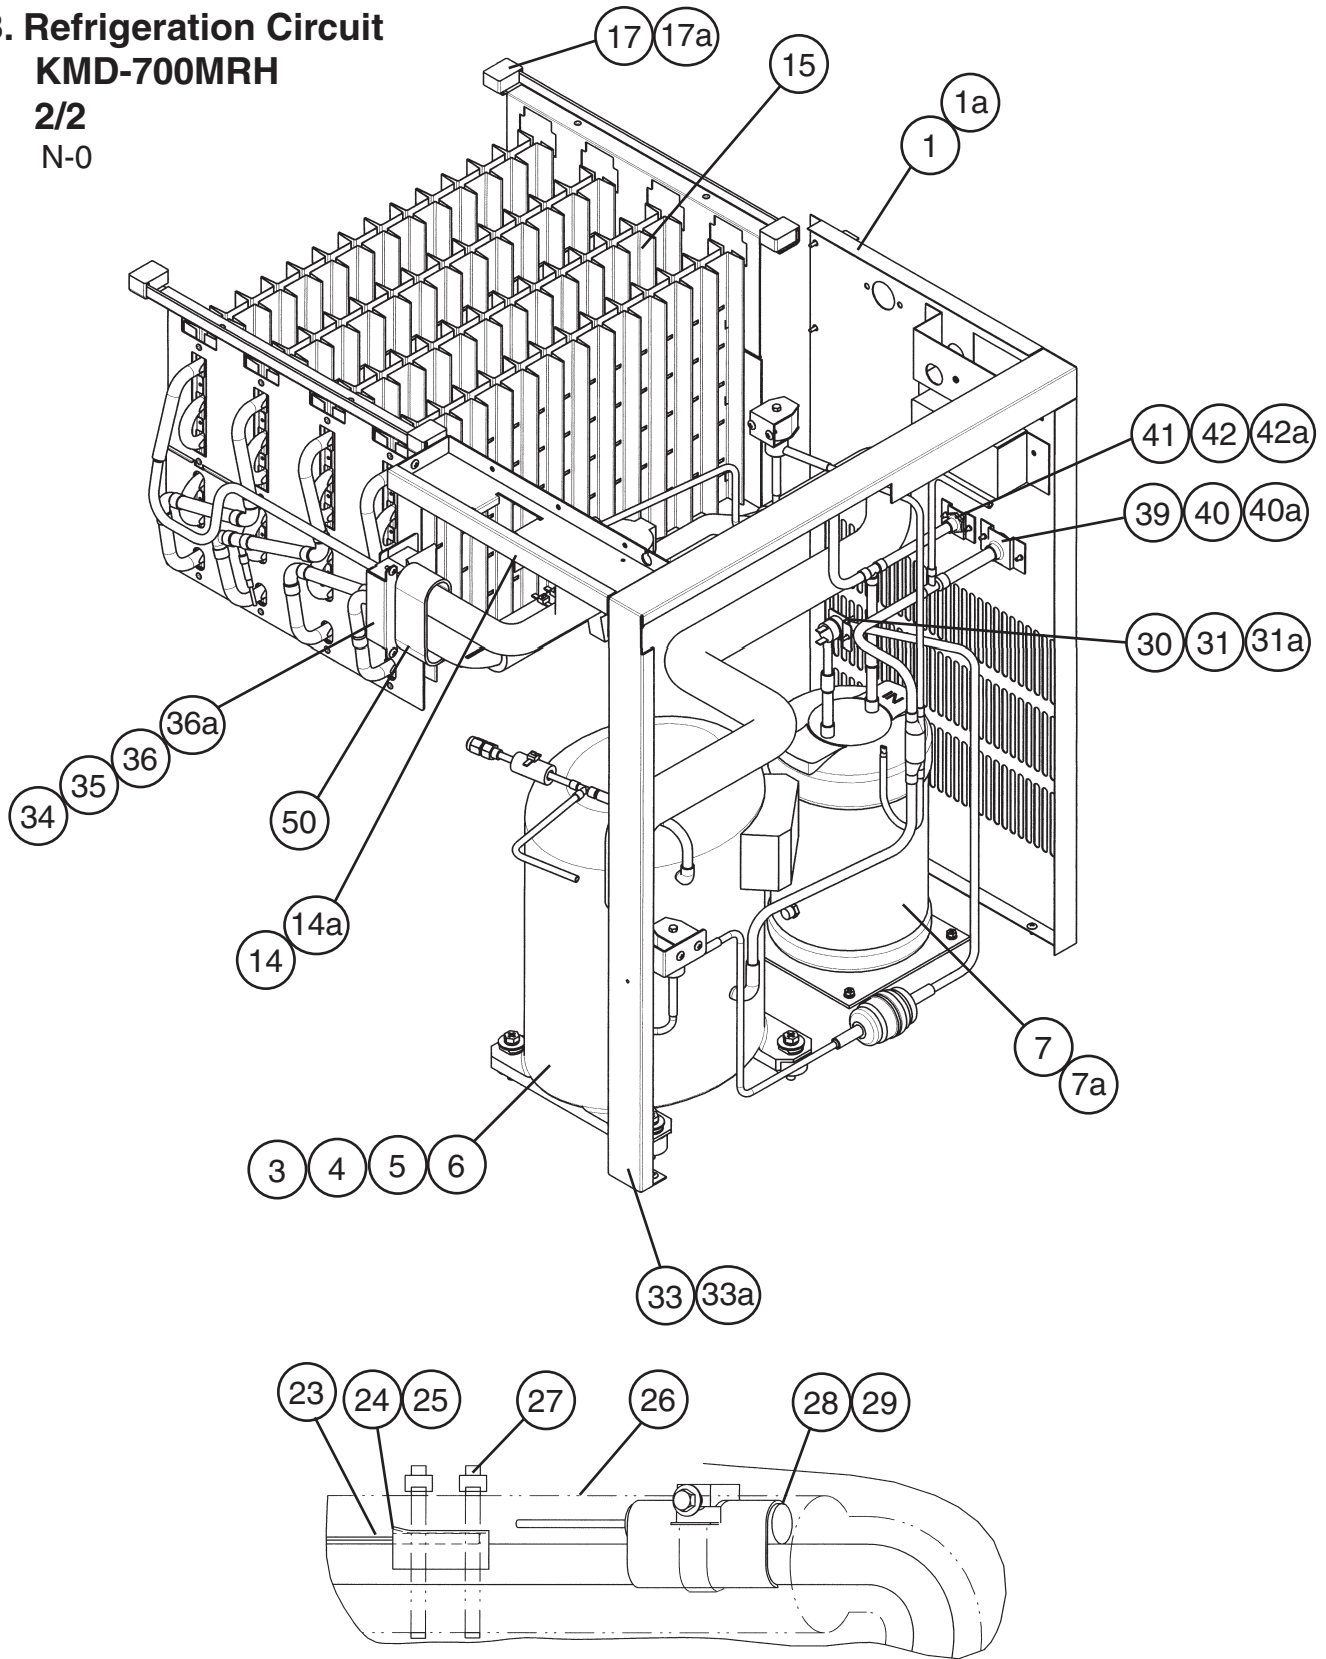

Detailed Thermistor Attachment

N-1, P-1, P-2, Q-0, R-0, R-1, S-1, T-0

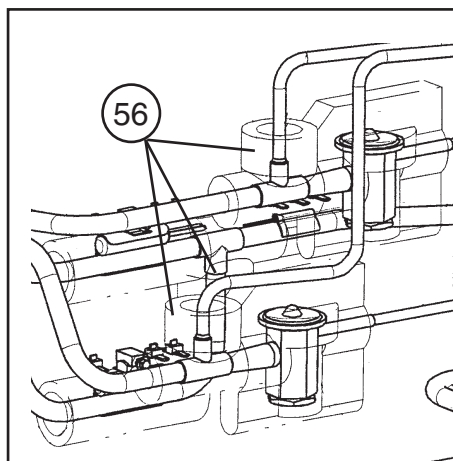


B. Refrigeration Circuit

KMD-700MRH

2/2

N-1, P-1, P-2, Q-0, R-0, R-1, S-1, T-0

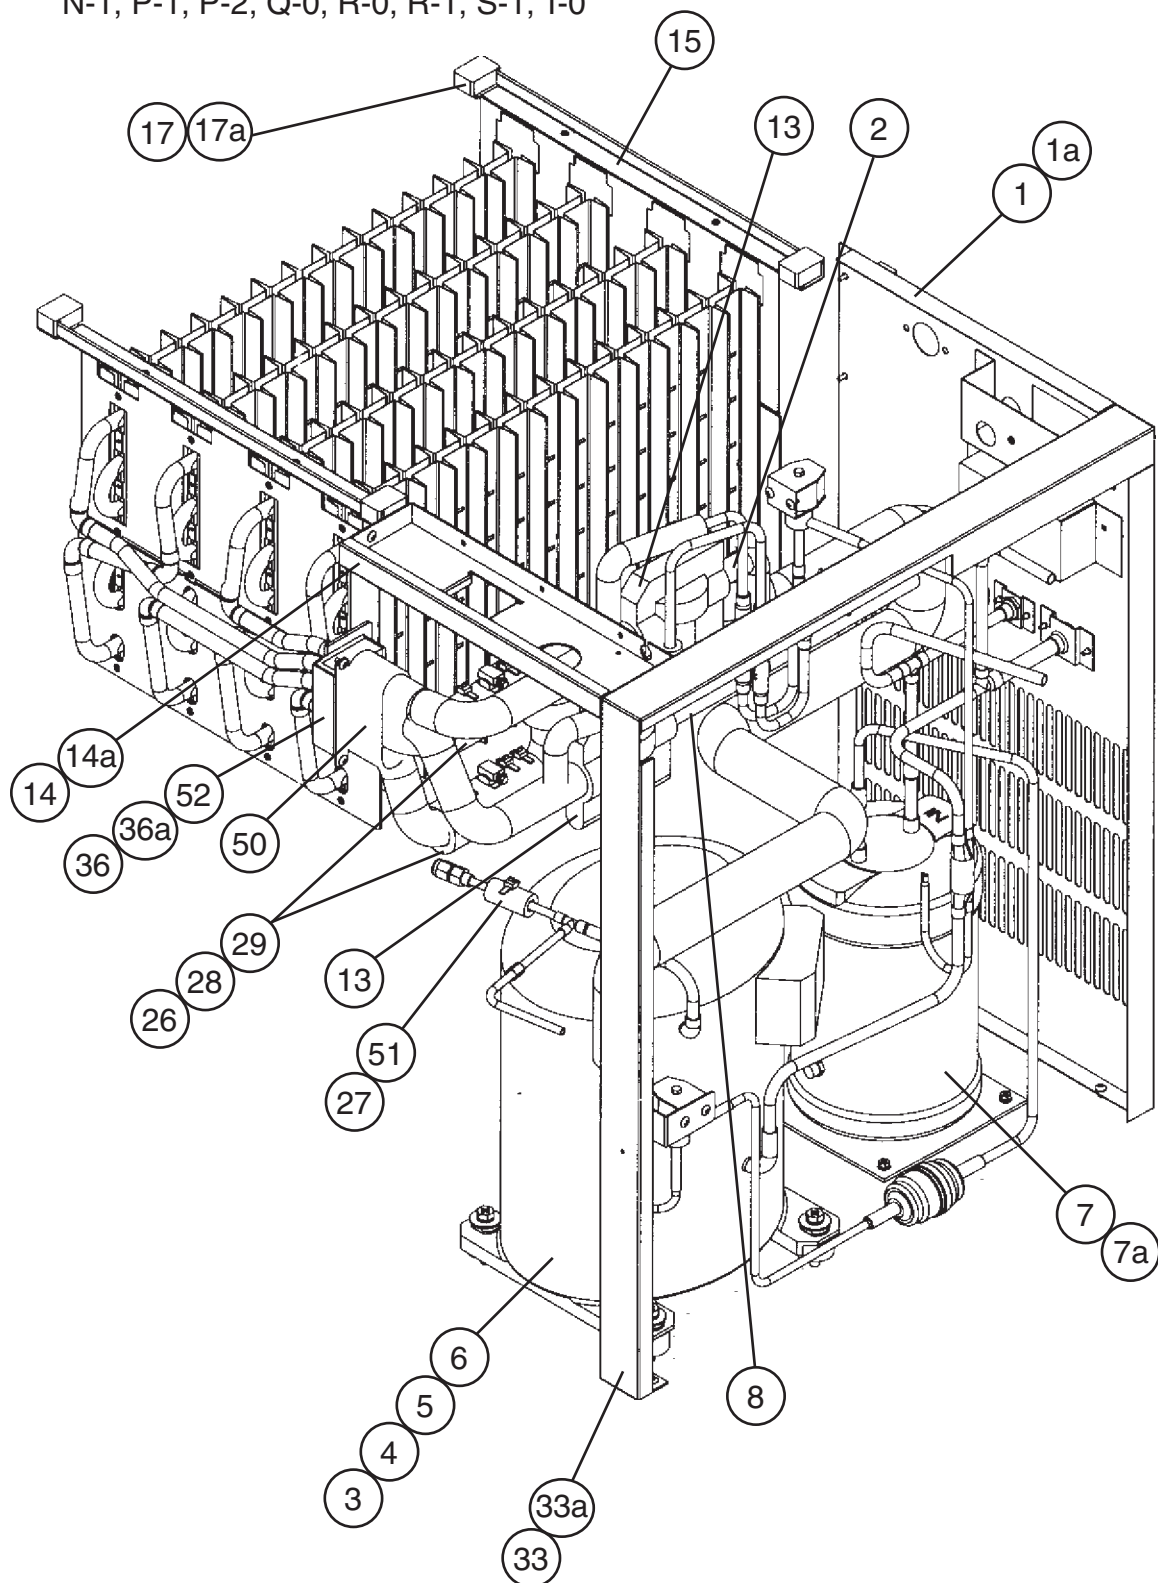


Title: B. Refrigeration Circuit Model: KMD-700MRH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0	N-1 P-1	P-2 Q-0	R-0 R-1	S-1 T-0				
1	Rear Panel	GS	3A2757G01	1	1	1	1	1				
1a	T2 Screw	4x8	7P31-0408	5	5	5	5	5				
2	Insulation Tube	L=184	7762-1020		1	1	1	1				
3	Compressor	CS10K6E-PFV-279	4A1539-02	1	1	1	1	1				
4	Bolt	8x45	437889-01	4	4	4	4	4				
5	Grommet	027-0167-00	434922-01	4	4	4	4	4				
6	Spacer	028-0188-02	434921-01	4	4	4	4	4				
7	Receiver Tank	-	437652-01	1	1	1	1	1				
7a	Hex Head Bolt w/Washer (LF)	5x10	7B0130510	3	3	3	3	3				
8	Insulation Tube	L=133	7762-1020		1	1	1	1				
9	Drier	-	4A2666-01	1	1	1	1	1				
10	End Cap	-	4A1413F01	2	-							
			4A2666F01		2	2	2	2				
11	Nylon Tie	PLWP3H-TL	8911-0301	1	1	1	1	1				
12	Expansion Valve	-	4A2053-01	1	-							
			4A1870-01		2	2	2	2				
13	Expansion Valve Cover	-	4A1168-01	1	2	2	2	2				
14	Front Frame	GS	3A2692-01	1	1	1	1	1				
14a	T2 Screw	4x8	7P31-0408	4	4	4	4	4				
15	Evaporator	-	2A2834G01	1	-							
			2A2781G01		1	1	1	1				
16	Copper Tube (C) - Low Side	-	3A3012G01		1	1	1	1				
17	Frame Seal	EPDM	323925-01	4	4	4	4	4				
17a	Truss Head Screw	4x8, SS	7C32-0408	4	4	4	4	4				
18	Valve Body - Hot Gas	70	440352-01	2	2	2	-					
			4A3978-01				1	1				
18a	Bolt	-	440353F01	2	2	2	-					
			4A3277F01				2	2				
19	Coil-Valve	ABS-25-1-HD-2	440353-01	2	2	2	-					
		-	4A3277-01				2	2				
19a	Truss Head Screw	4x8	7C31-0408	2	2	2	2	2				
20	Copper Tube (B) - Low Side	-	3A3043G01		1	1	1	1				
21	Tee	-	436000-01		1	1	1	1				
22	Line Valve Bracket	GS	4A3037-01	1	1	1	1	1				
22a	T2 Screw	4x8	7P31-0408	2	2	2	2	2				
23	Thermistor	-	429006-05	1	1	-						
			429006-03			1	1	1				
24	Holder – Thermistor	CU	438247-01	1	1	1	1	1				
25	Insulation – Thermistor	PE FOAM	427441-01	1	1	1	1	1				
26	Insulation Tube	L=220	7762-2943	1	-							
		L=110			2	2	2	2				
27	Cable Tie	-	7920-0010	3	10	10	10	10				
28	Holder – Expansion Valve	-	3A0112-01	1	2	2	2	2				

Title: B. Refrigeration Circuit Model: KMD-700MRH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0	N-1 P-1	P-2 Q-0	R-0 R-1	S-1 T-0				
29	Clamp	-	443461-02	1	2	2	2	2				
30	Pressure Switch	ACB-1UB09	433441-07	1	1	1	1	1				
31	Pressure Switch Bracket	GS	434938-01	1	1	1	1	1				
31a	T2 Screw	4x8	7P31-0408	1	1	1	1	1				
32	Access Valve	-	457729-01	1	1	1	1	1				
33	Side Frame	GS	3A2691G01	1	1	1	1	1				
33a	Truss Head Screw	4x8	7C31-0408	4	4	4	4	4				
34	Rubber Insulation (A)	-	3A2649-01	1	-							
35	Rubber Insulation (B)	-	3A2650-01	1	-							
36	Insulation Holder	SS	4A3043-01	1	1	1	1	-				
			3A0979-01					1				
36a	T2 Screw	4x8, SS	7P32-0408	2	2	2	2	2				
37	Copper Tube (A) - Liquid	-	4A3321-01		1	1	1	1				
38	Copper Tube (A) High Side (includes Strainer, item 58)	CU	3A2759G01	1	1	1	1	1				
39	Coupling	-	434136G01	1	1	1	1	1				
40	Tube Holder – L	GS	438245-01	1	1	1	1	1				
40a	T2 Screw	4x8	7P31-0408	2	2	2	2	2				
41	Coupling	-	433751G01	1	1	1	1	1				
42	Tube Holder – S	GS	438246-01	1	1	1	1	1				
42a	T2 Screw	4x8	7P31-0408	2	2	2	2	2				
43	Copper Tube (B) – High Side	CU	4A3038G01	1	1	1	1	1				
44	Copper Tube (C) – High Side	CU	3A2761-01	1	1	1	1	1				
45	Copper Tube (D) – High Side	CU	3A2763-01	1	1	1	1	1				
46	Copper Tube (E) – High Side	CU	3A2764-01	1	1	1	1	1				
47	Heat Exchanger	-	3A2765G01	1	-							
			3A3041G01		1	1	1	1				
48	Copper Tube (A) – Low Side	CU	3A2697G01	1	-							
			3A3010G01		1	1	1	1				
49	Copper Tube – Access Valve	-	3A2698G01	1	1	1	1	1				
50	Insulation	-	436671-01	1	1	1	1	1				
51	Insulation Tube	L=40	7762-1020	1	1	1	1	1				
52	Insulated Rubber Tube	-	323975G01		1	1	1	1				
53	Check Valve Assembly	-	3A3042G01		1	1	1	1				
54	Check Valve	SKC31220	4A2054-01		2	2	2	2				
55	Copper Tube (B) - Liquid	-	4A3322-01		1	1	1	1				
56	Connection Tee Cover	-	4A1379-01		1	3	3	3				
57	Valve Body - Liquid Line	-	4A3276-01				1	1				
58	Strainer (included in item 38: Copper Tube (A) High Side)	-	4A0397-01	1	1	1	1	1				

C. Water Circuit

KMD-700MAH, MWH, MRH



N-0, N-1, P-0, P-1, P-2, P-3, Q-0, R-0, R-1, S-1, T-0

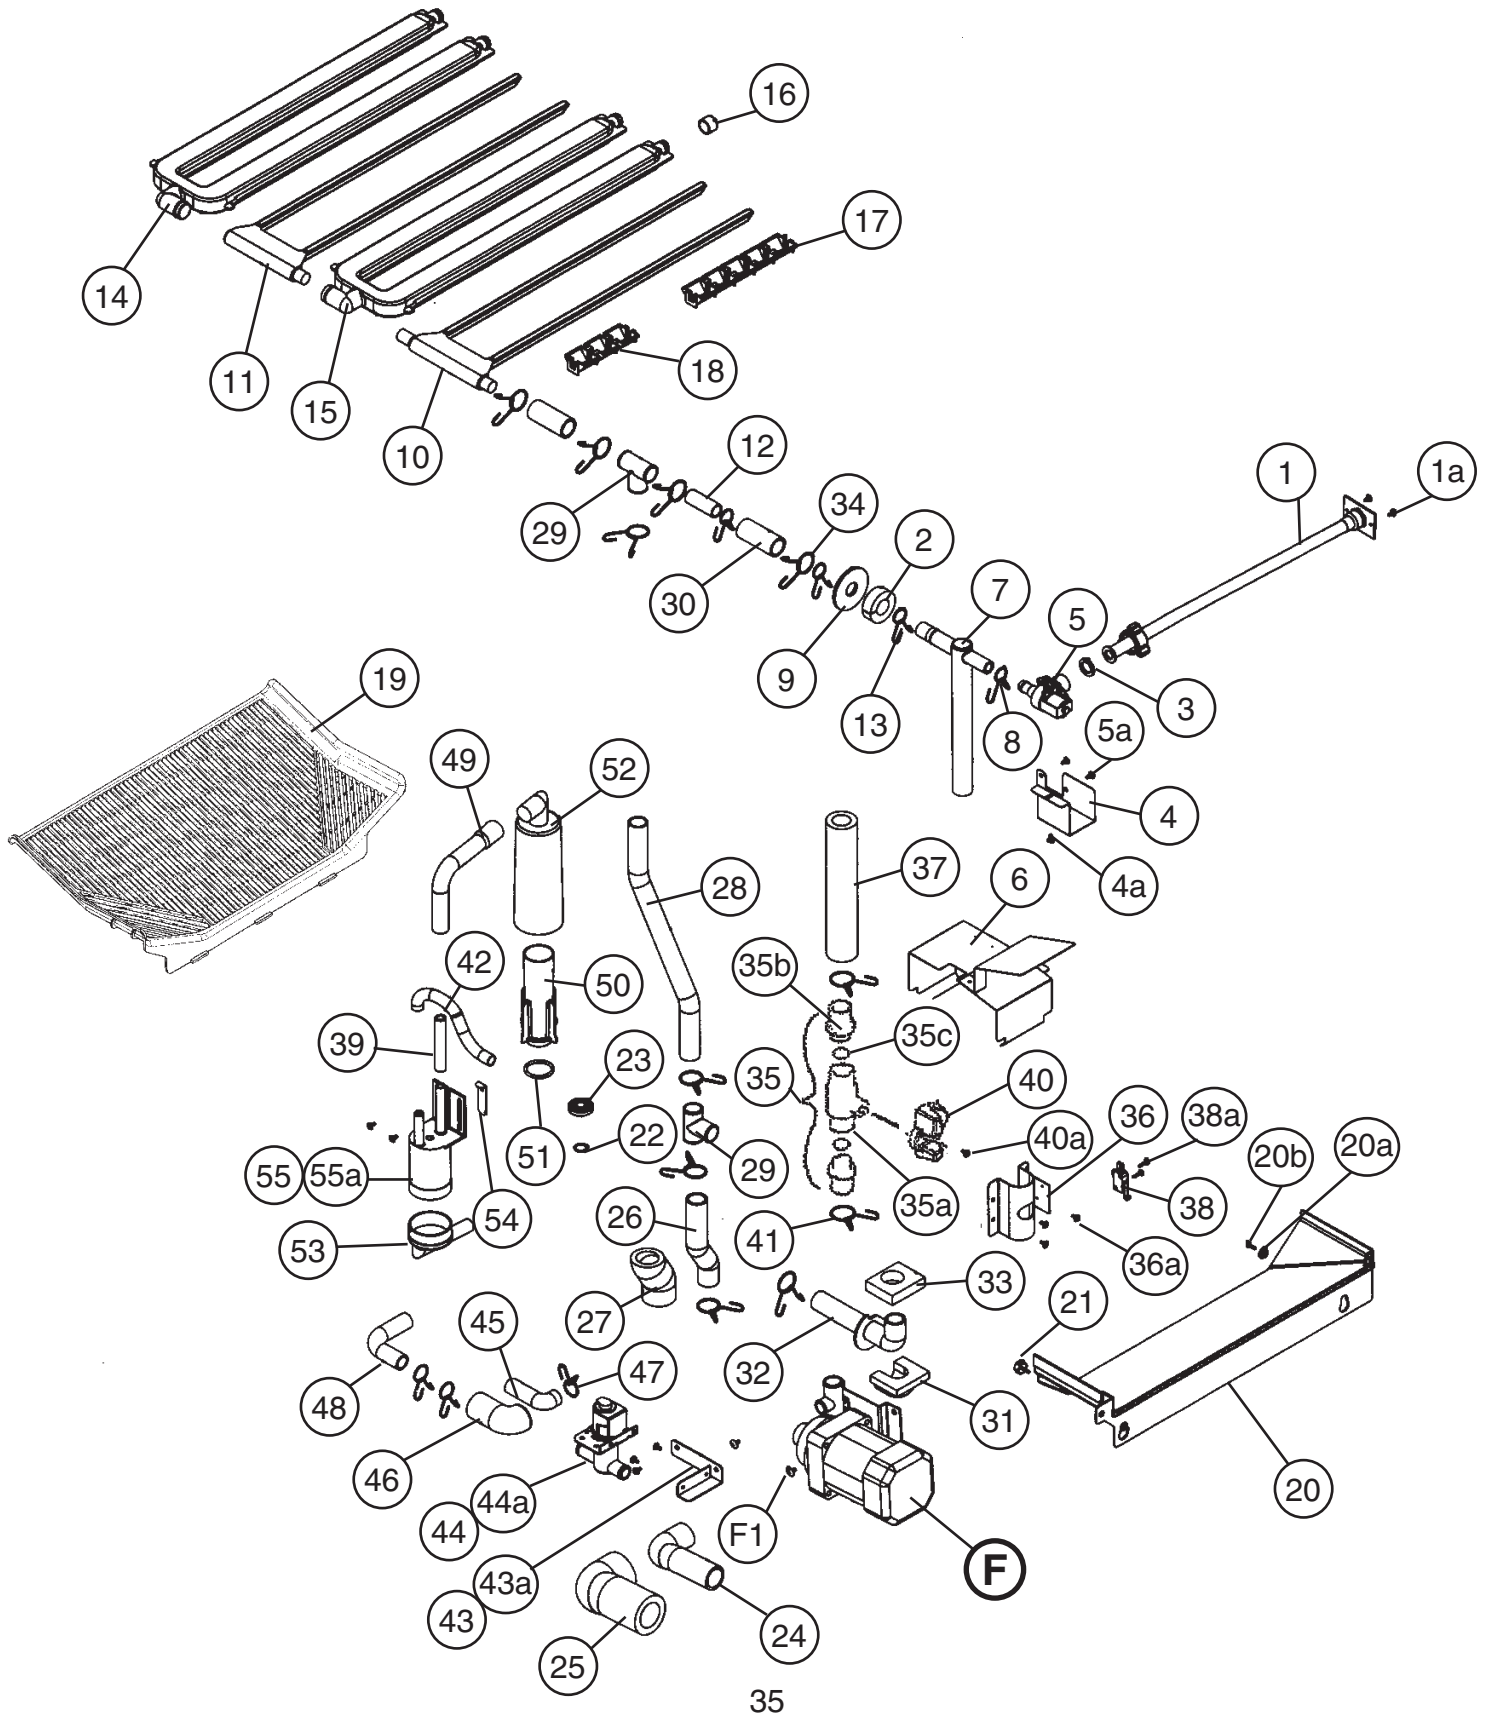

Title: C. Water Circuit Model: KMD-700MAH, MWH, MRH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0	N-1 to P-1	P-2 to Q-0	R-0 R-1	S-1 T-0				
F	Pump Motor Assembly	HS-0178	2A2848A01	1	1	1	1	1				
F1	Truss Head Screw	5x8, SS	7C32-0508	2	2	2	2	2				
1	Water Supply Pipe	-	4A0768G07	1	1	1	1	1				
1a	T2 Screw	4x8, SS	7P32-0408	2	2	2	2	2				
2	Insulation (E)	-	4A0392-01	1	1	1	1	1				
3	Rubber Gasket	-	413854-03	1	1	1	1	1				
4	Water Valve Bracket	GS	3A2685-01	1	1	1	1	1				
4a	T2 Screw	4x8	7P31-0408	1	1	1	1	1				
5	Water Valve	-	4A1176-01	1	-							
			4A1176-03		1	1	1	1				
5a	Truss Head Screw	4x8, SS	7C32-0408	2	2	2	2	2				
6	Water Shield	SS	3A2725G01	1	1	1	1	1				
7	Hose – Water Valve	-	3A2648-01	1	1	1	1	1				
8	Hose Clamp	16.5 mm, SS	427443-04	1	1	1	1	1				
9	Flange	-	439267-01	1	1	1	1	1				
10	Water Supply Tube	-	2A2370-01	1	1	1	1	1				
11	Water Supply Tube	-	2A2370-02	1	1	1	1	1				
12	Vinyl Hose	L=47	7716-1519	1	1	1	1	1				
13	Hose Clamp	18 mm, SS	427443-05	3	3	3	3	3				
14	Spray Tube	-	2A2369-01	1	1	1	1	1				
15	Spray Tube	-	2A2369-02	1	1	1	1	1				
16	Spray Tube Plug	-	3A2645-01	4	4	4	4	4				
17	Spray Guide (A)	-	208586-01	8	8	8	8	8				
18	Spray Guide (D)	-	208586-04	4	4	4	4	4				
19	Cube Guide (A)	-	1A0842-01	1	1	1	1	1				
20	Cube Guide (B)	-	1A0781-01	1	1	1	1	1				
20a	Collar	-	435269-01	2	2	2	2	2				
20b	T2 Flat Head Screw	4x12, SS	7P22-0412	2	2	2	2	2				
21	Thumbscrew	-	415949G10	1	1	1	1	1				
22	"O" Ring	-	7611-P015	1	1	1	1	1				
23	Drain	-	309246-01	1	1	1	1	1				
24	Suction Hose	-	4A3001-01	1	1	1	1	1				
25	Insulation Tube	L=170	7762-3555	1	1	1	1	1				
26	Discharge Hose	-	3A2646-01	1	1	1	1	1				
27	Insulation Tube	L=77	7762-2943	1	1	1	1	1				
28	Vinyl Hose	L=358	7716-2025	1	1	1	1	1				
29	Distributor	-	432426-01	2	2	2	2	2				
30	Vinyl Hose	L=63	7716-2025	2	2	2	2	2				
31	Corner Insulation (A)	-	439376-01	1	1	1	1	1				
32	Bypass Hose	-	439237-03	1	1	1	1	1				


Title: C. Water Circuit Model: KMD-700MAH, MWH, MRH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0	N-1 to P-1	P-2 to Q-0	R-0 R-1	S-1 T-0				
33	Corner Insulation (B)	-	439392-01	1	1	1	1	1				
34	Hose Clamp	25 mm, SS	427443-03	9	9	9	9	9				
35	Ball Valve Assembly	S-0761	442137A01	1	1	1	1	1				
35a	Ball Valve	442137A01	439293-01	1	1	1	1	1				
35b	Male Adaptor	442137A01	325826-01	2	2	2	2	2				
35c	"O" Ring	442137A01	7611-P018	2	2	2	2	2				
36	Valve Holder	-	3A1178-01	1	1	1	1	1				
36a	FT Screw	4x8	7F31-0408	3	3	3	3	3				
37	Insulation Tube	L=210	7762-2636	1	1	1	1	1				
38	Microswitch	-	4A2546-01	1	1	1	1	1				
38a	Tapping Screw	3x14	431415-02	2	2	2	2	2				
39	Silicone Hose	L=80	773013896	1	-							
		L=200			1	1	1	1				
40	Handle	-	215383-01	1	1	1	1	1				
40a	T2 Screw	4x8	7P31-0408	1	1	1	1	1				
41	Hose Clamp	27 mm, SS	427443-08	2	2	2	2	2				
42	Hose – Float Switch	-	3A2647-01	1	1	1	1	1				
43	Drain Valve Bracket	SS	3A2686-01	1	1	1	1	1				
43a	Truss Head Screw	4x8, SS	7C32-0408	2	2	2	2	2				
44	Drain Valve	-	4A2396-01	1	1	1	1	1				
44a	Truss Head Screw	4x8, SS	7C32-0408	2	2	2	2	2				
45	Drain Hose – PM	-	4A3044-01	1	1	1	1	1				
46	Insulation Tube	L=75	7762-2636	1	1	1	1	1				
47	Hose Clamp	20 mm, SS	427443-06	9	9	9	9	9				
48	Drain Hose	-	4A3002-01	1	1	1	1	1				
49	Drain Hose – Overflow	-	4A3003-01	1	1	1	1	1				
50	Overflow Pipe	-	430722-06	1	-							
			430722-07		1	1	1	1				
51	"O" Ring	-	4A1234-01	1	1	1	1	1				
52	Overflow Cap	-	321002-01	1	1	1	1	1				
53	Connector – Float Switch	-	426799-03	1	1	1	1	1				
54	Float Switch Stop	-	4A0137-01	1	-							
55	Float Switch	-	4A0886-03	1	1	-						
			4A0886-01			1	1	-				
			4A3624-01					1				
55a	Truss Head Screw	4x8, SS	7C32-0408	2	2	2	2	2				

D. Control Box Assembly
KMD-700MAH, MWH, MRH
 N-0, N-1, P-0, P-1

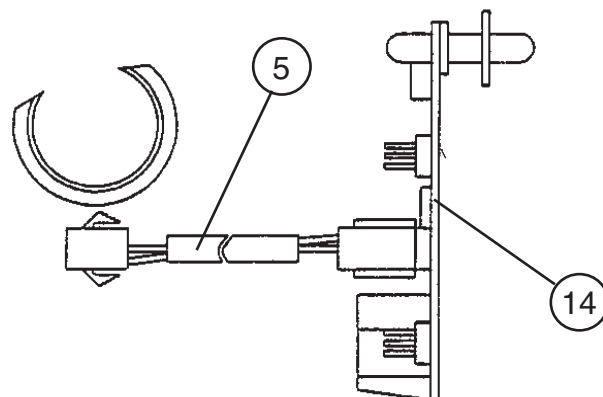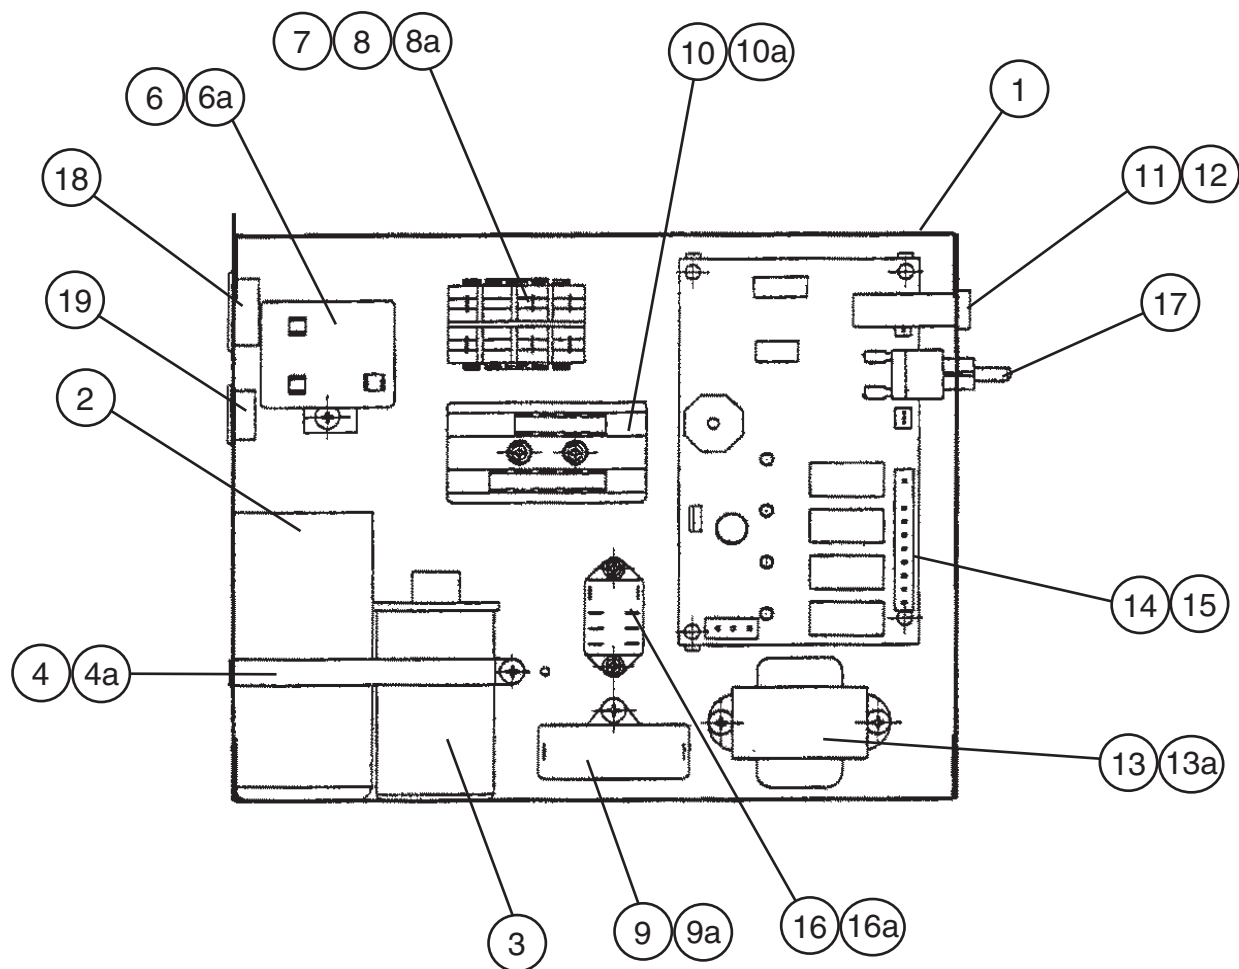


Detailed Resistor Wire Harness Connection

D. Control Box Assembly
KMD-700MAH, MWH, MRH
P-2, P-3, Q-0, R-0, R-1, S-1, T-0

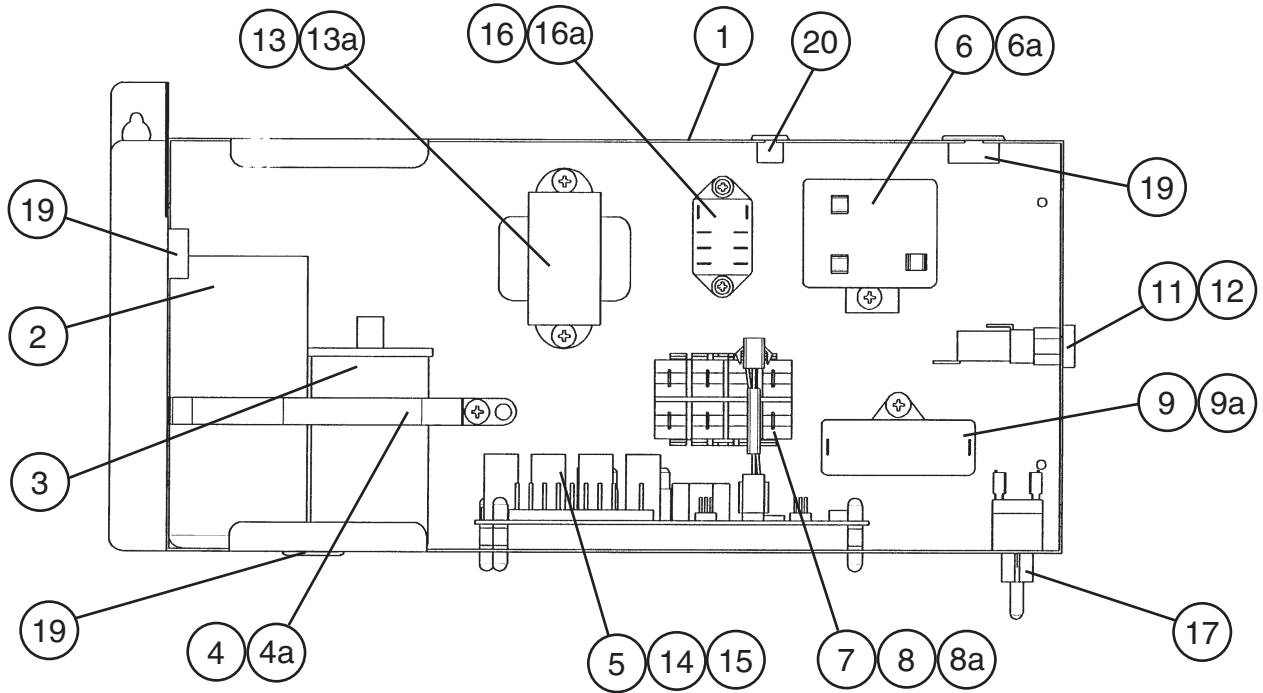

Title: D. Control Box Assembly Model: KMD-700MAH, MWH, MRH											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0 to P-1	P-2 to R-0	R-1 to T-0					
1	Control Box	GS	2A2799-01	1	-						
			3A3068G01		1	1					
2	Capacitor - Starting	145-174 MFD 220 VAC	3A0076-11	1	1	1					
3	Capacitor - Run	35 MFD 370 VAC	3A2005-03	1	1	1					
4	Strap	GS	4A2262-03	1	1	1					
4a	T2 Screw	4x8	7P31-0408	1	1	1					
5	Resistor Wire Harness	L=1220	4A2200G01	1	1	1					
6	Starter	-	4A1107-13	1	1	1					
6a	T2 Screw	4x8	7P31-0408	1	1	1					
7	Magnetic Contactor (includes Bracket item 8 as of P-2)	VC20	428393-01	1	1	1					
8	Bracket	-	428393F01	1							
8a	T2 Screw	4x8	7P31-0408	2	2	2					
9	Capacitor	10 MFD 250 VAC	443192-01	1	1	1					
9a	T2 Screw	4x10	7P31-0410	1	1	1					
10	Terminal Block	-	4A2619-01	1	-						
10a	Tapping Screw	3x8	431415-01	2	-						
11	Fuse Holder	HTB921	4A0892-01	1	1	-					
		HTB821	4A3449-01			1					
12	Fuse	AGC-10	4A0893-07	2	2	2					
13	Transformer	26D285H	3A0172-01	1	1	1					
13a	T2 Screw	4x8	7P31-0408	2	2	2					
14	Controller Board	HOSHIZAKI-001A	2A1410-01	1	1	1					
15	Board Support	OBLS37-M	4A0336-03	4	4	4					
16	Relay	LY2F 120 VAC	406132-07	1	1	1					
16a	Tapping Screw	3x8	431415-01	2	2	2					
17	Toggle Switch	8966K84	443119-01	1	1	1					
18	Bushing	SB-1093-15	420470-03	1	-						
19	Bushing	OCB-875	428394-04	1	3	3					
20	Bushing	OCB-500	428394-02		3	3					


E. Label Location
KMD-700MAH
N-0, N-1, P-0

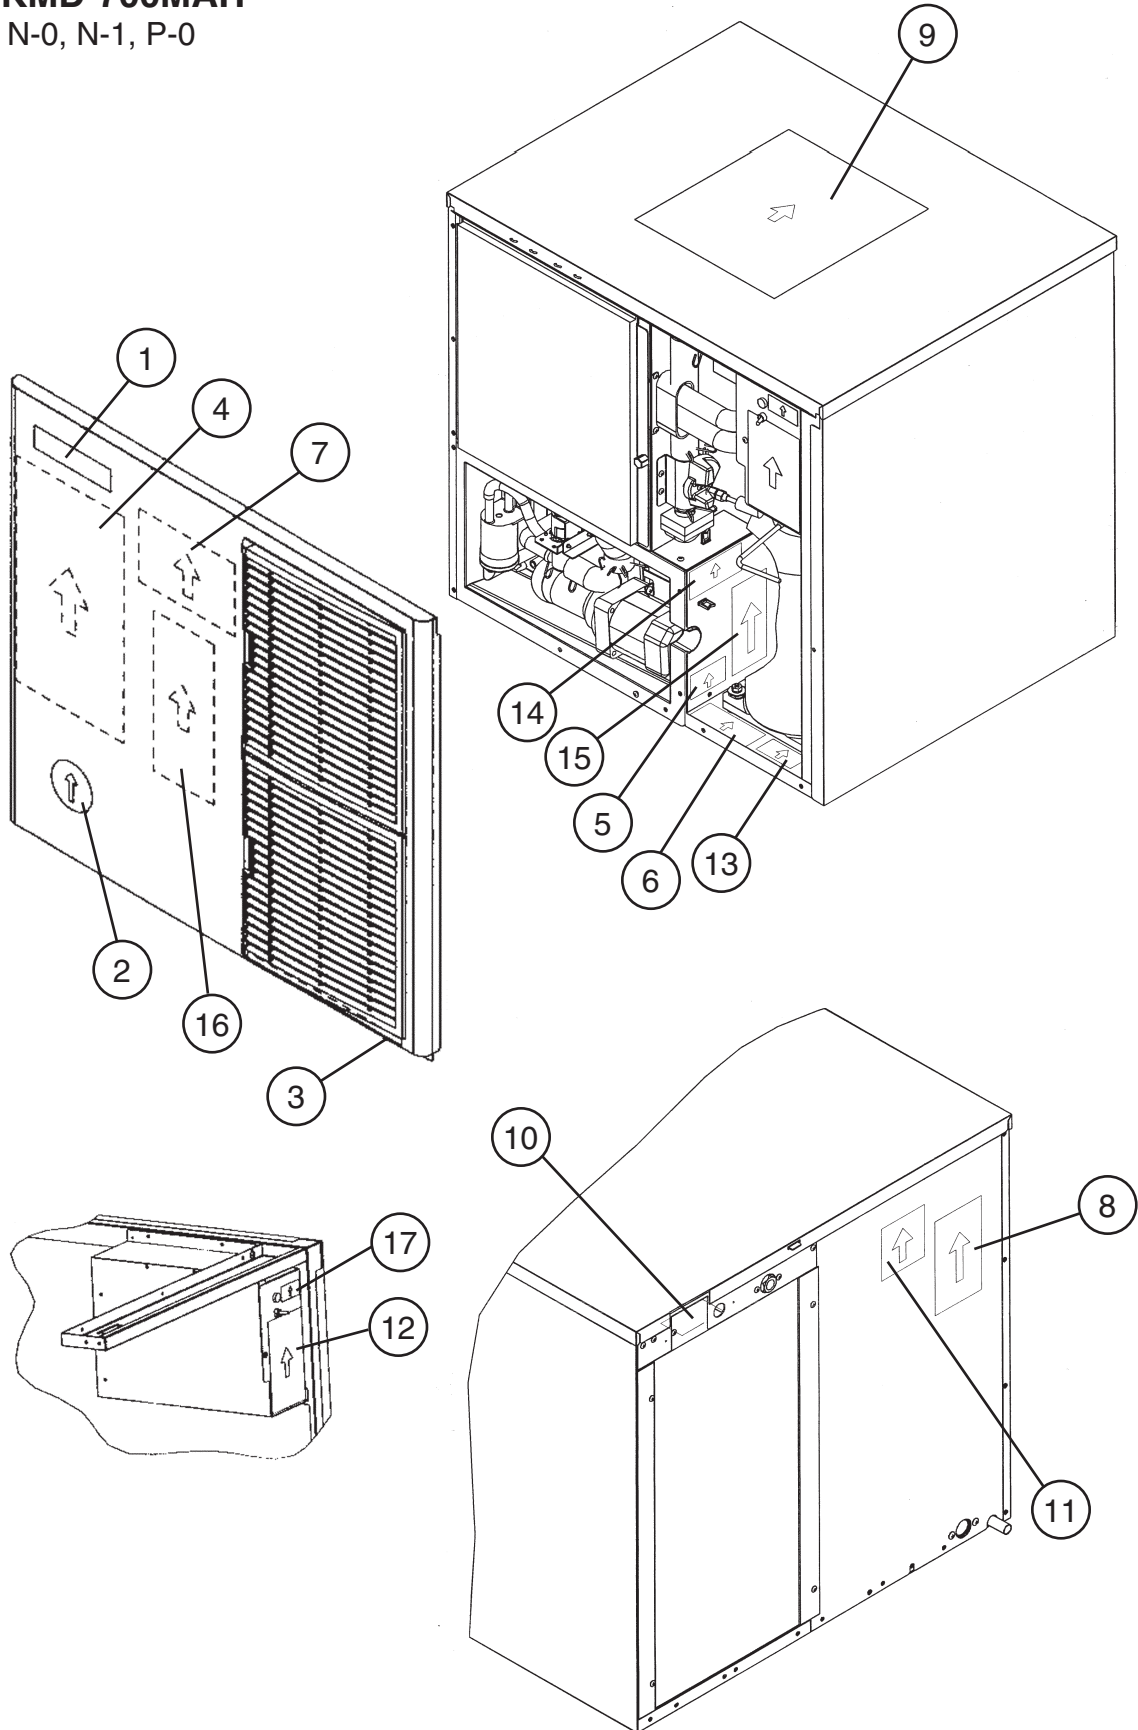

E. Label Location


KMD-700MAH

P-2, P-3, Q-0, R-0, R-1, S-1, T-0

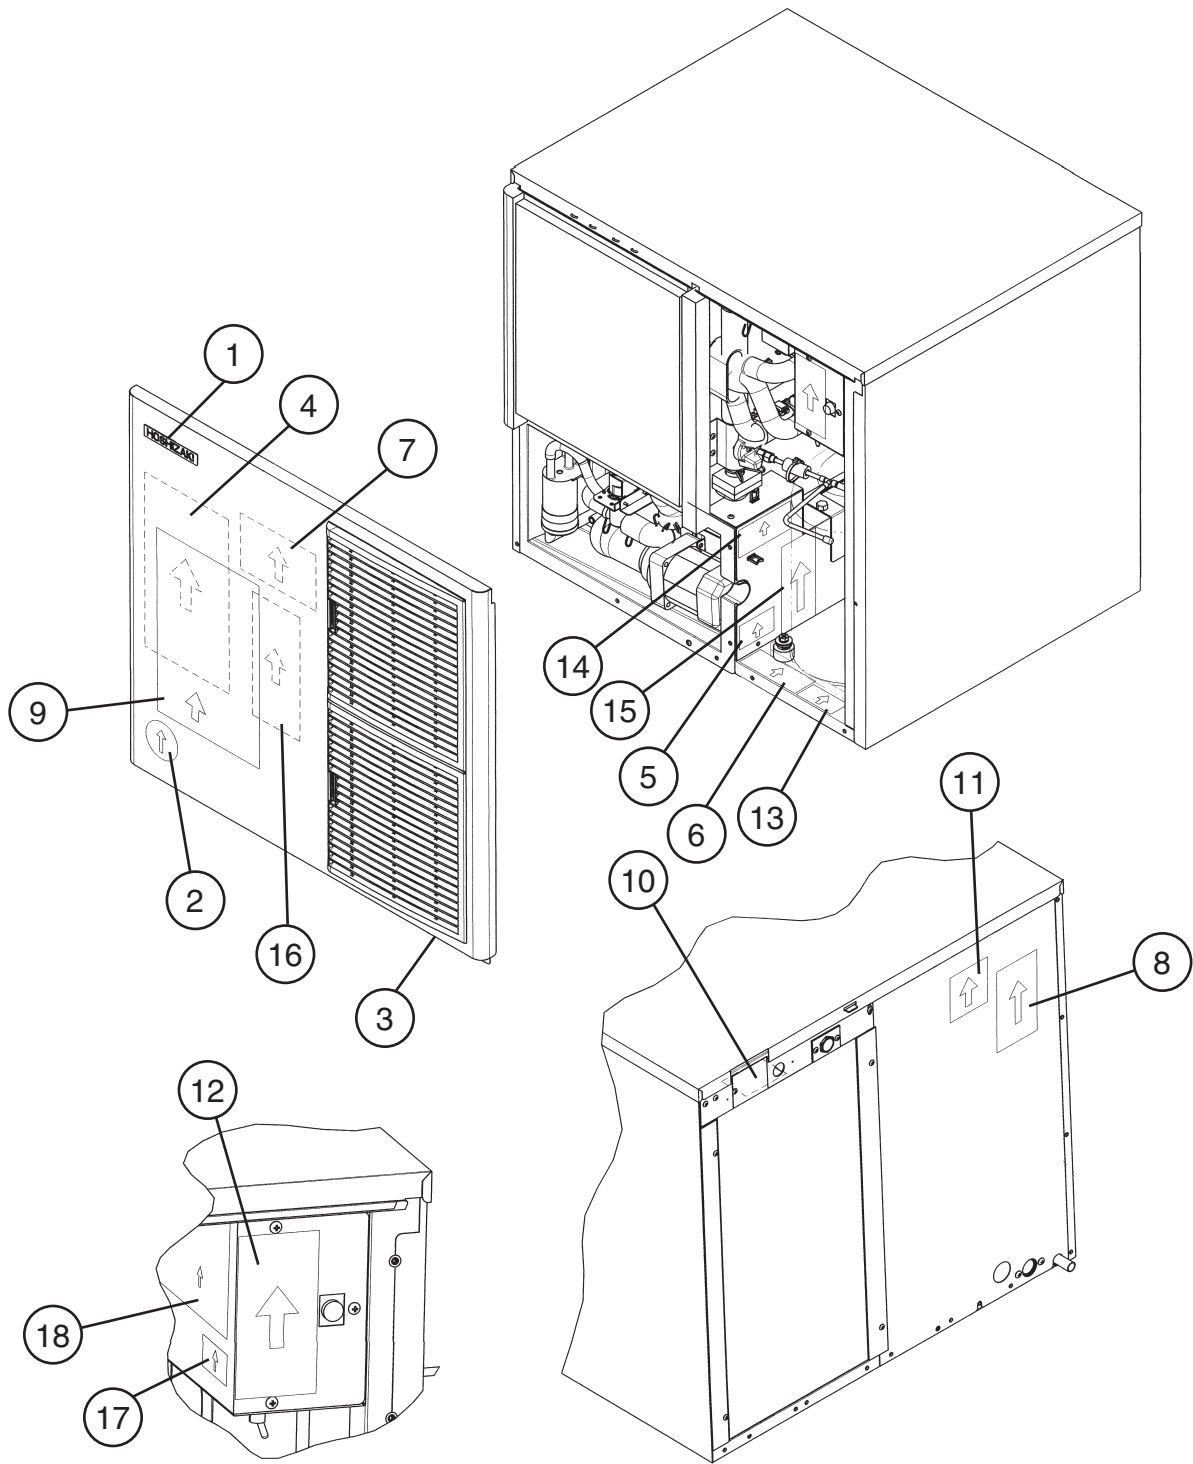

Title: E. Label Location Model: KMD-700MAH													
Index No.	Description	Material or Model Number	Part Number	Required Number									
				N-0 to P-0	P-2 P-3	Q-0	R-0 to T-0						
1	Emblem	ABS	4A0560-01	1	1	1	1						
2	Label – Penguin (R)	PETP FILM	4A0526-01	1	1	1	1						
3	Label – Air Filter	PETP FILM	426177-01	1	1	1	1						
4	Maintenance Label	PVC FILM	2A2821-01	1	1	1	1						
5	Caution Label (F)	PVC FILM	439146-01	1	1	1	1						
6	Caution Label (K)	PVC FILM	439150-01	1	1	1	1						
7	Wiring Label	PVC FILM	3A2730-01	1	1	1	1						
8	Nameplate	-	2A2832-01	1	1	1	1						
9	Instruction Sheet	PAPER	2A2822-01	1	1	1	1						
10	Tag – Warning: Electrical Connection	PAPER	428430-01	1	1	1	1						
11	Instruction Label	PVC FILM	444575-01	1	1	1	1						
12	Manual Label	PVC FILM	3A2729-01	1	-								
			3A3072-01		1	1	1						
13	Label – R-404A	PES FILM	4A0960-01	1	1	1	1						
14	Operation Label – Valve	PVC FILM	439541-01	1	1	1	1						
15	Rating Label	-	2A2833-01	1	1	1	1						
16	Label – Control Board	PVC FILM	3A2220-01	1	1	1	1						
17	Label – Fuse	-	4A2817-01	1	1	1	1						
18	Label – Alarm	-	4A3517-01			1	1						


E. LABEL LOCATION
KMD-700MWH
N-0, N-1

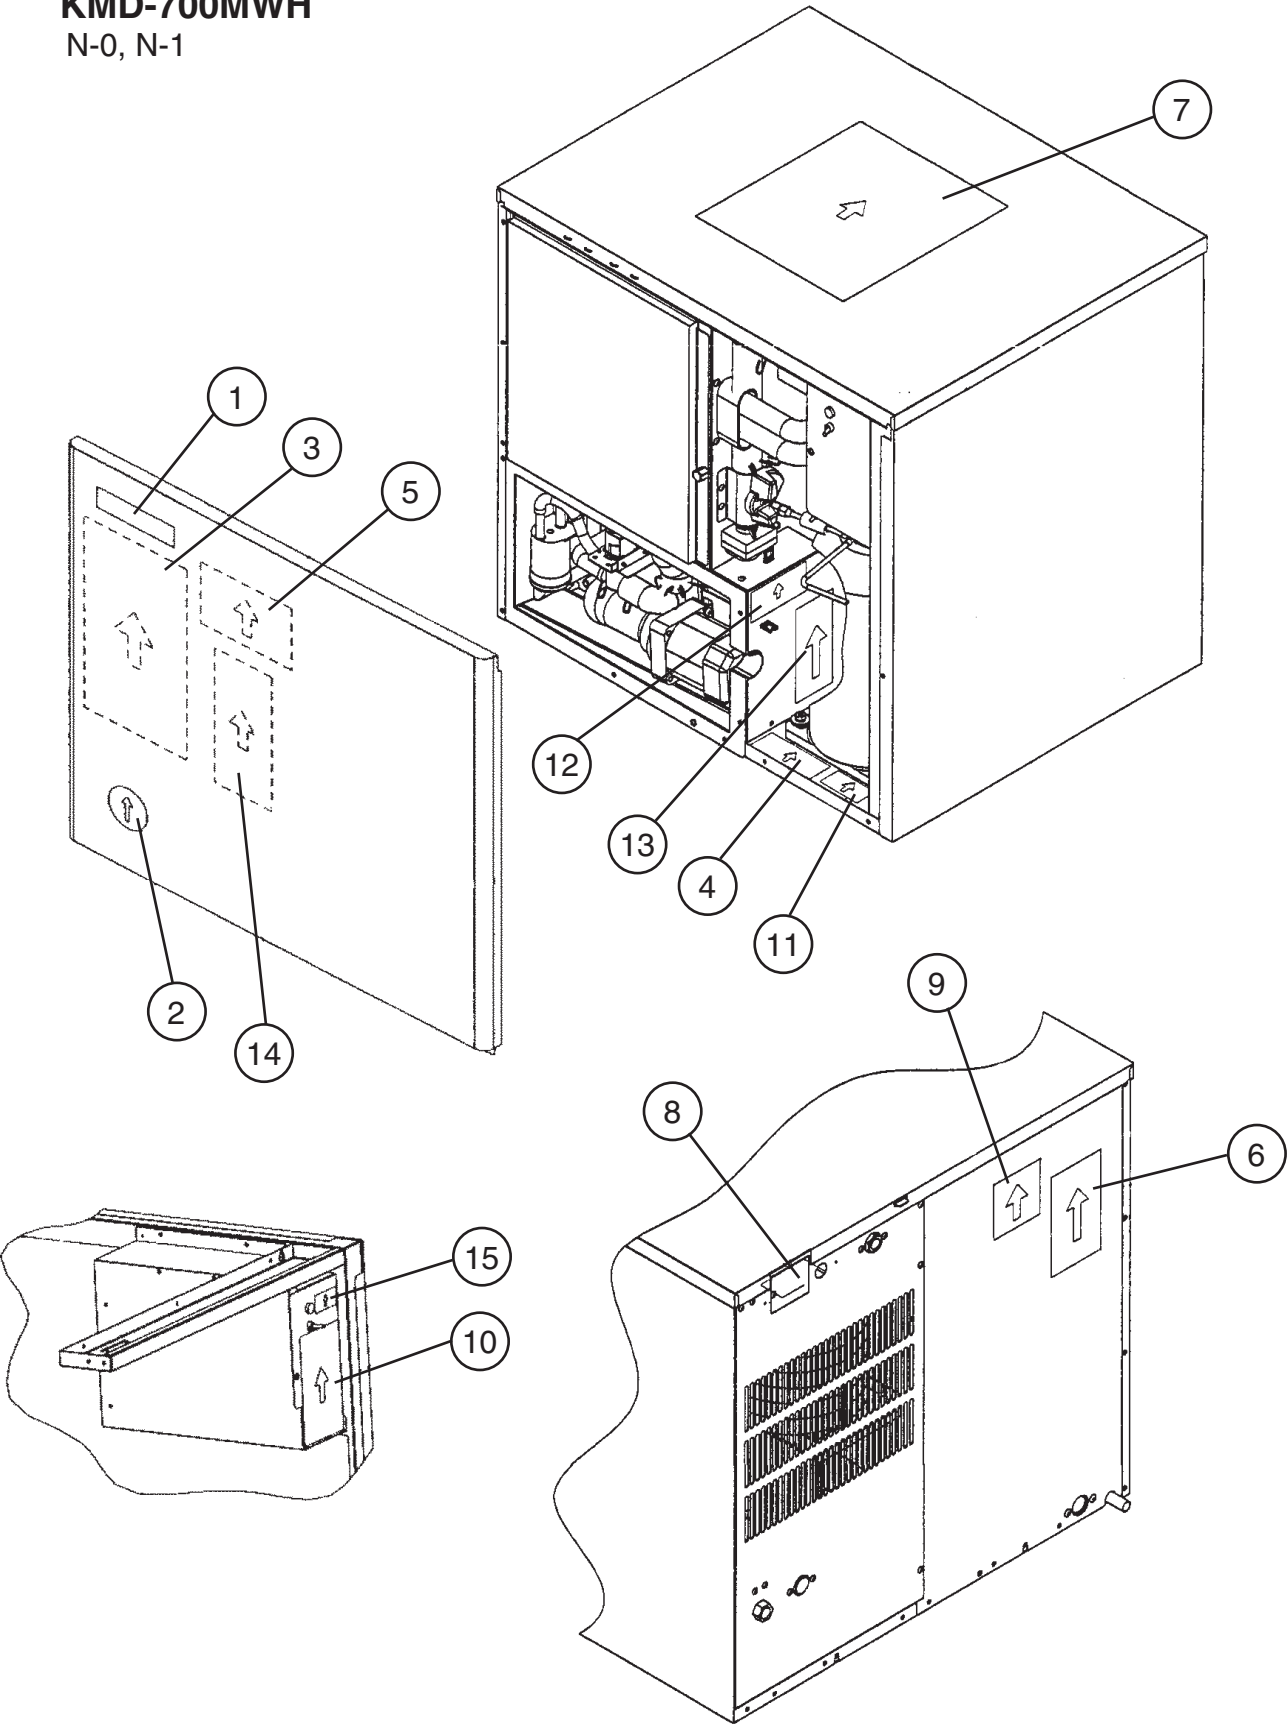

E. Label Location


KMD-700MWH

P-2, Q-0, R-0, R-1, S-1, T-0

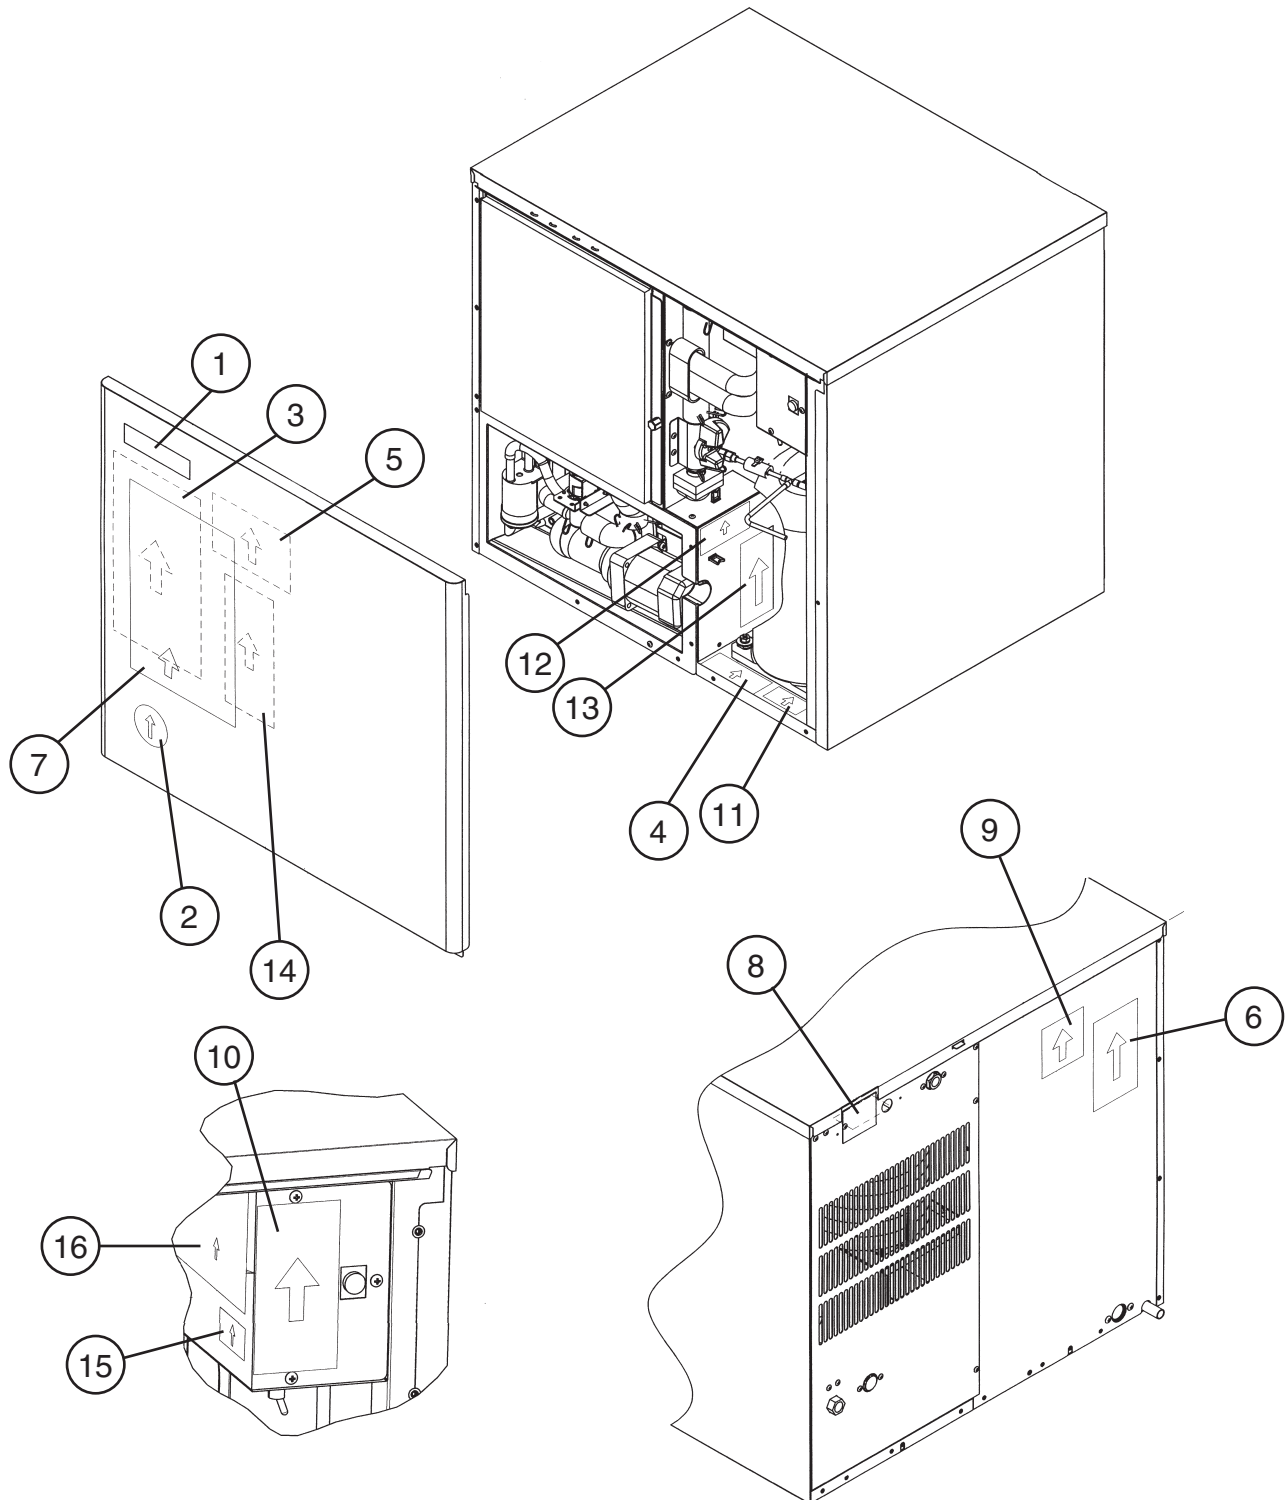

Title: E. Label Location Model: KMD-700MWH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0 N-1	P-2	Q-0	R-0 to T-0					
1	Emblem	ABS	4A0560-01	1	1	1	1					
2	Label – Penguin (R)	PETP FILM	4A0526-01	1	1	1	1					
3	Maintenance Label	PVC FILM	2A2821-01	1	1	1	1					
4	Caution Label (K)	PVC FILM	439150-01	1	1	1	1					
5	Wiring Label	PVC FILM	3A2730-01	1	1	1	1					
6	Nameplate	-	2A2832-02	1	1	1	1					
7	Instruction Sheet	PAPER	2A2822-01	1	1	1	1					
8	Tag – Warning: Electrical Connection	PAPER	428430-01	1	1	1	1					
9	Instruction Label	PVC FILM	444575-01	1	1	1	1					
10	Manual Label	PVC FILM	3A2729-01	1	-							
			3A3072-01		1	1	1					
11	Label – R-404A	PES FILM	4A0960-01	1	1	1	1					
12	Operation Label – Valve	PVC FILM	439541-01	1	1	1	1					
13	Rating Label	-	2A2833-02	1	1	1	1					
14	Label – Control Board	PVC FILM	3A2220-01	1	1	1	1					
15	Label – Fuse	-	4A2817-01	1	1	1	1					
16	Label – Alarm	-	4A3517-01			1	1					


E. Label Location
KMD-700MRH
N-0, N-1, P-1

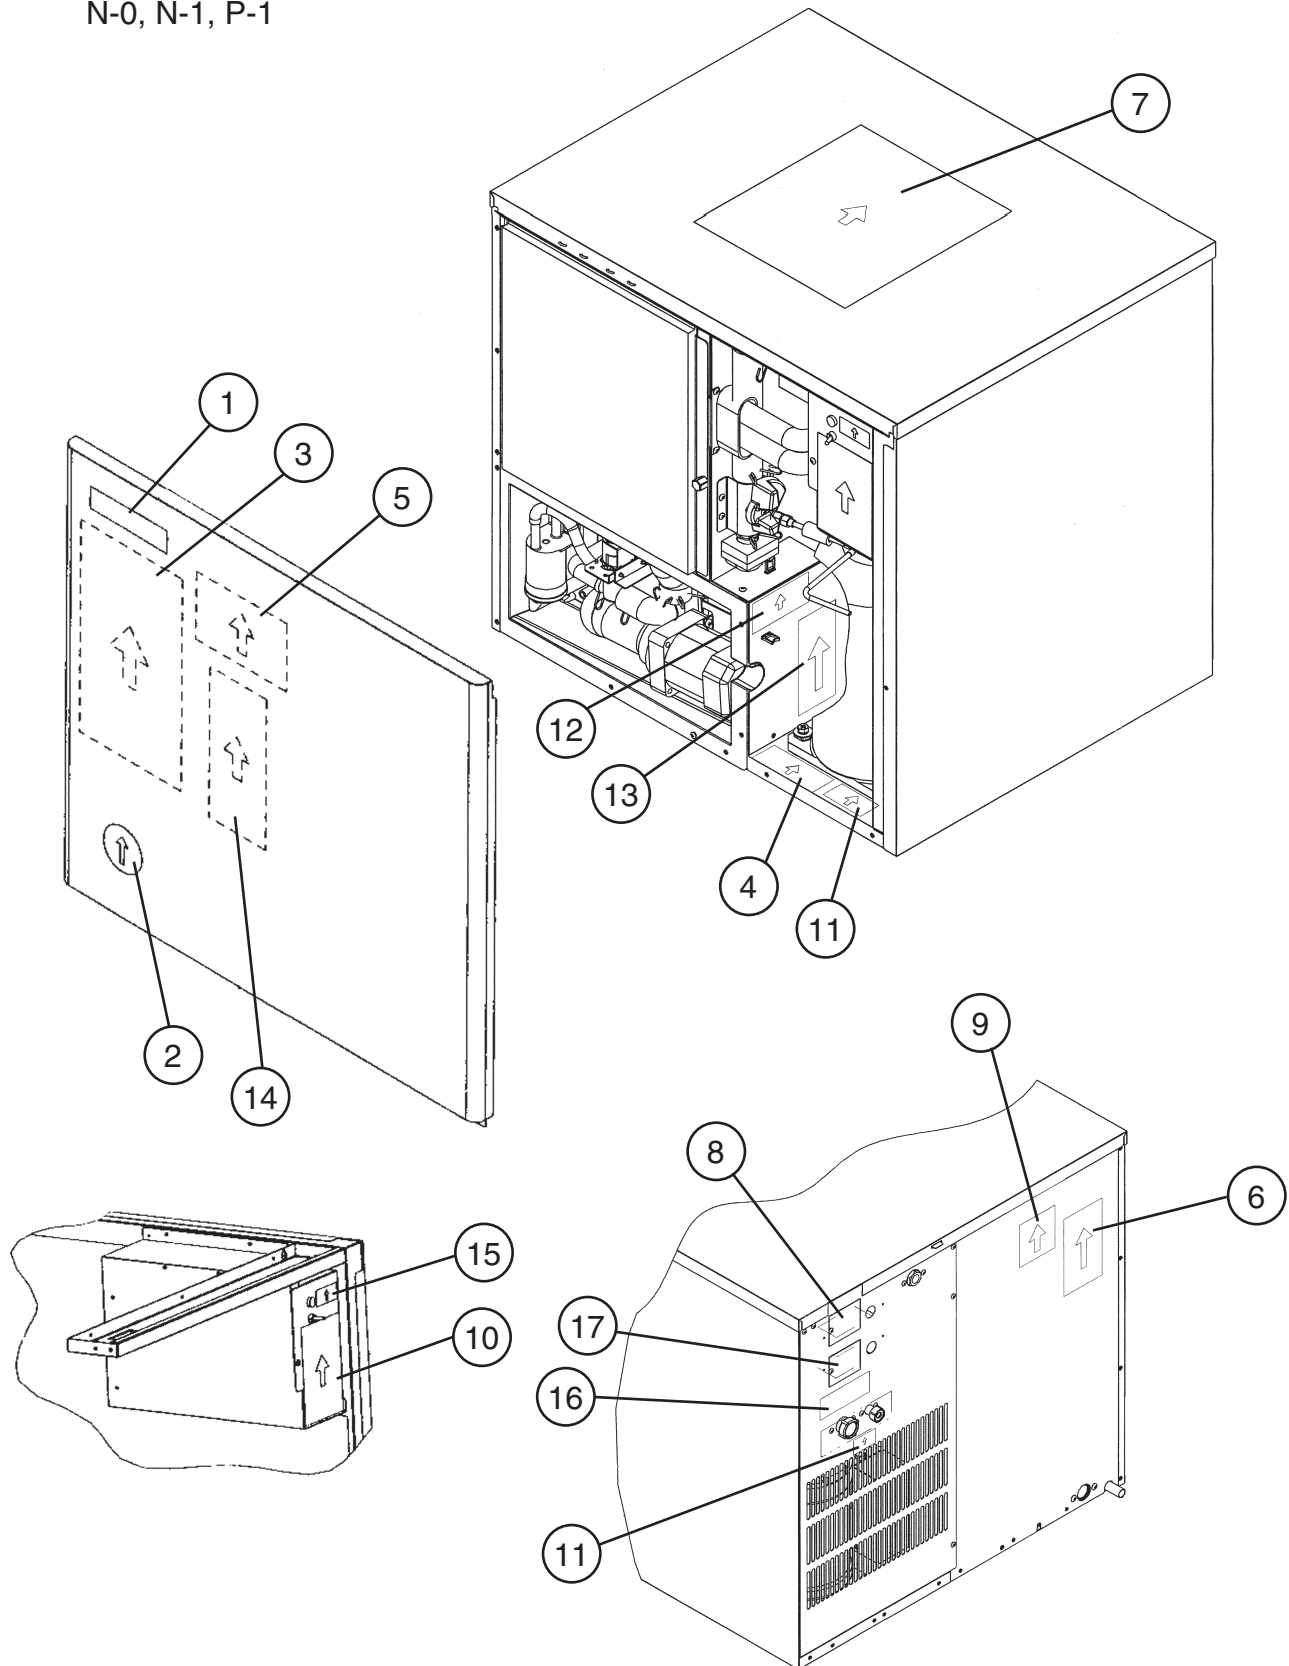

E. Label Location

KMD-700MRH

P-2, Q-0, R-0, R-1, S-1, T-0

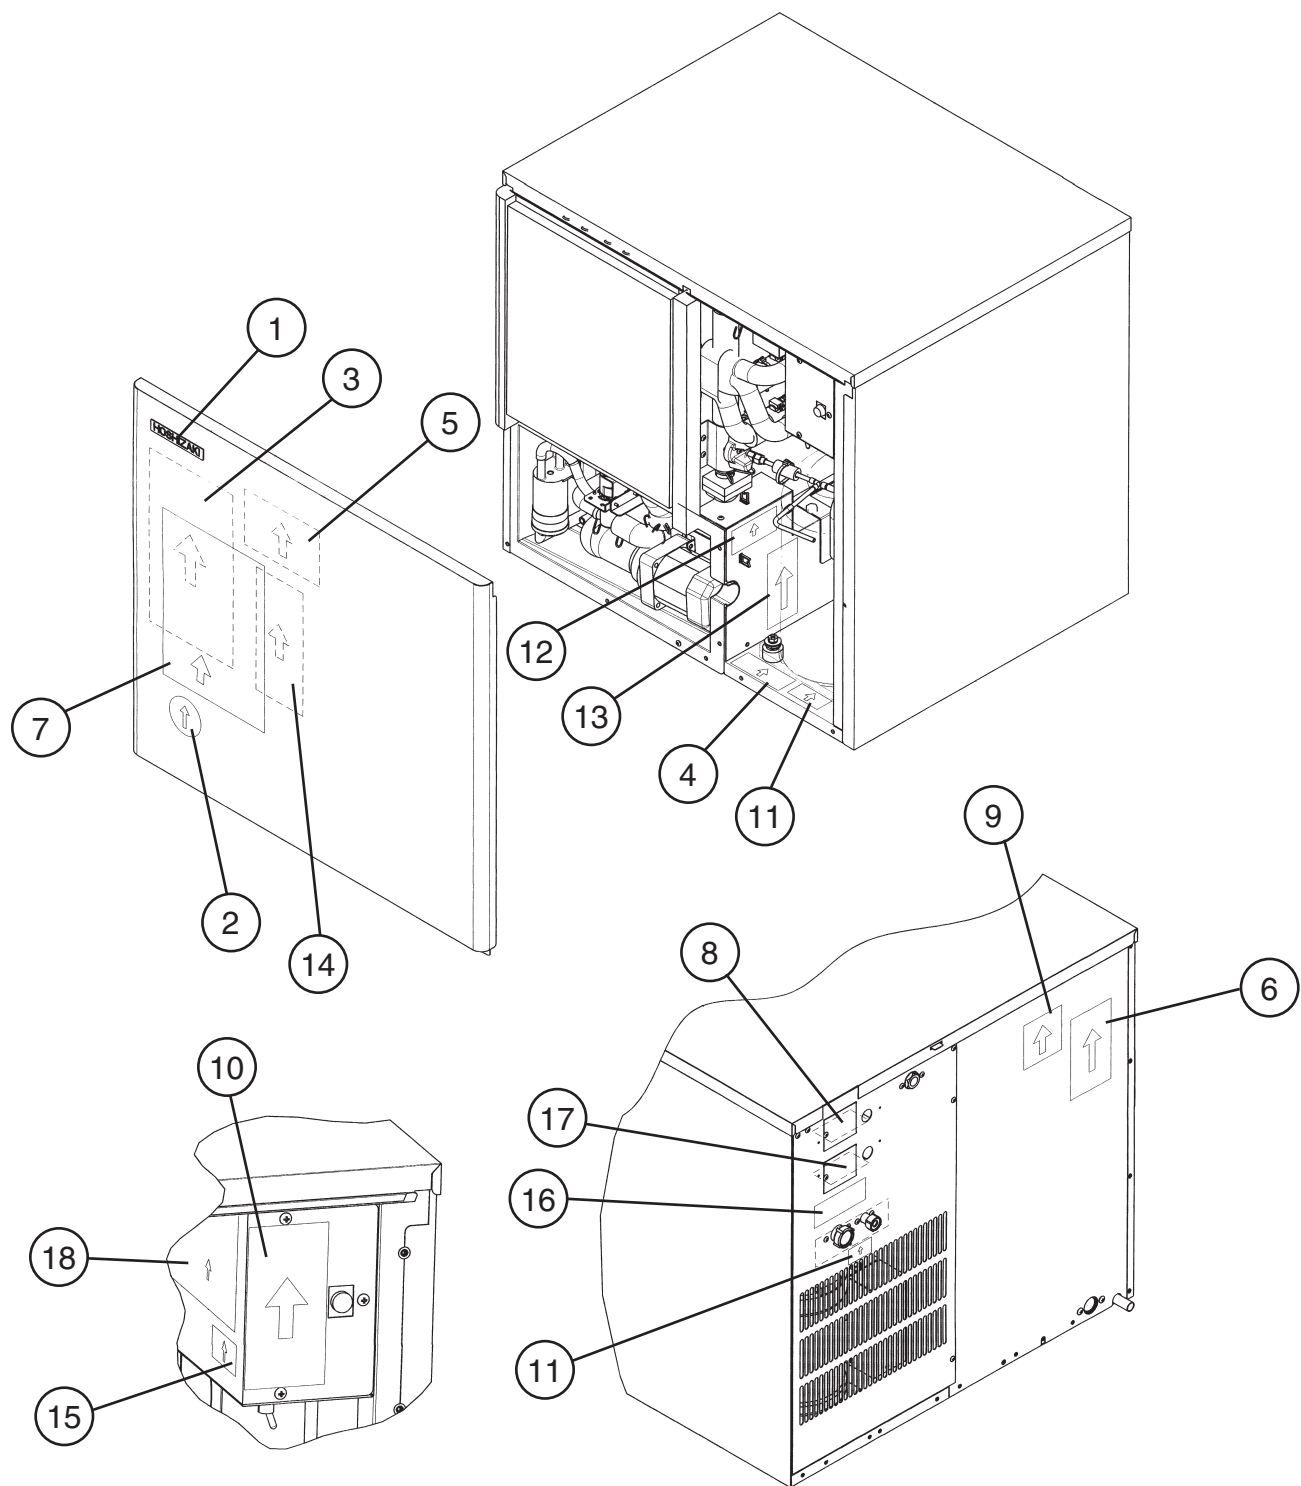


Title: **E. Label Location** Model: **KMD-700MRH**

Index No.	Description	Material or Model Number	Part Number	Required Number									
				N-0 to P-1	P-2	Q-0	R-0 to T-0						
1	Emblem	ABS	4A0560-01	1	1	1	1						
2	Label - Penguin (R)	PETP FILM	4A0526-01	1	1	1	1						
3	Maintenance Label	PVC FILM	2A2821-01	1	1	1	1						
4	Caution Label (K)	PVC FILM	439150-01	1	1	1	1						
5	Wiring Label	PVC FILM	3A2767-01	1	1	1	1						
6	Nameplate	-	2A2832-03	1	1	1	1						
7	Instruction Sheet	PAPER	2A2822-01	1	1	1	1						
8	Tag - Warning: Electrical Connection	PAPER	428430-01	1	1	1	1						
9	Instruction Label	PVC FILM	444575-01	1	1	1	1						
10	Manual Label	PVC FILM	3A2729-01	1	-								
			3A3072-01		1	1	1						
11	Label – R-404A	PES FILM	4A0960-01	1	1	2	2						
12	Operation Label - Valve	PVC FILM	439541-01	1	1	1	1						
13	Rating Label	-	2A2833-03	1	1	1	1						
14	Label – Control Board	PVC FILM	3A2220-01	1	1	1	1						
15	Label – Fuse	-	4A2817-01	1	1	1	1						
16	Caution – Remote Label	-	4A1491-01	1	1	1	1						
17	Tag - Fan Motor Leads	-	4A1494-01	1	1	1	1						
18	Label – Alarm	-	4A3517-01			1	1						

F. Pump Motor Assembly

KMD-700MAH, MWH, MRH

N-0, N-1, P-0, P-1, P-2, P-3, Q-0, R-0, R-1, S-1, T-0

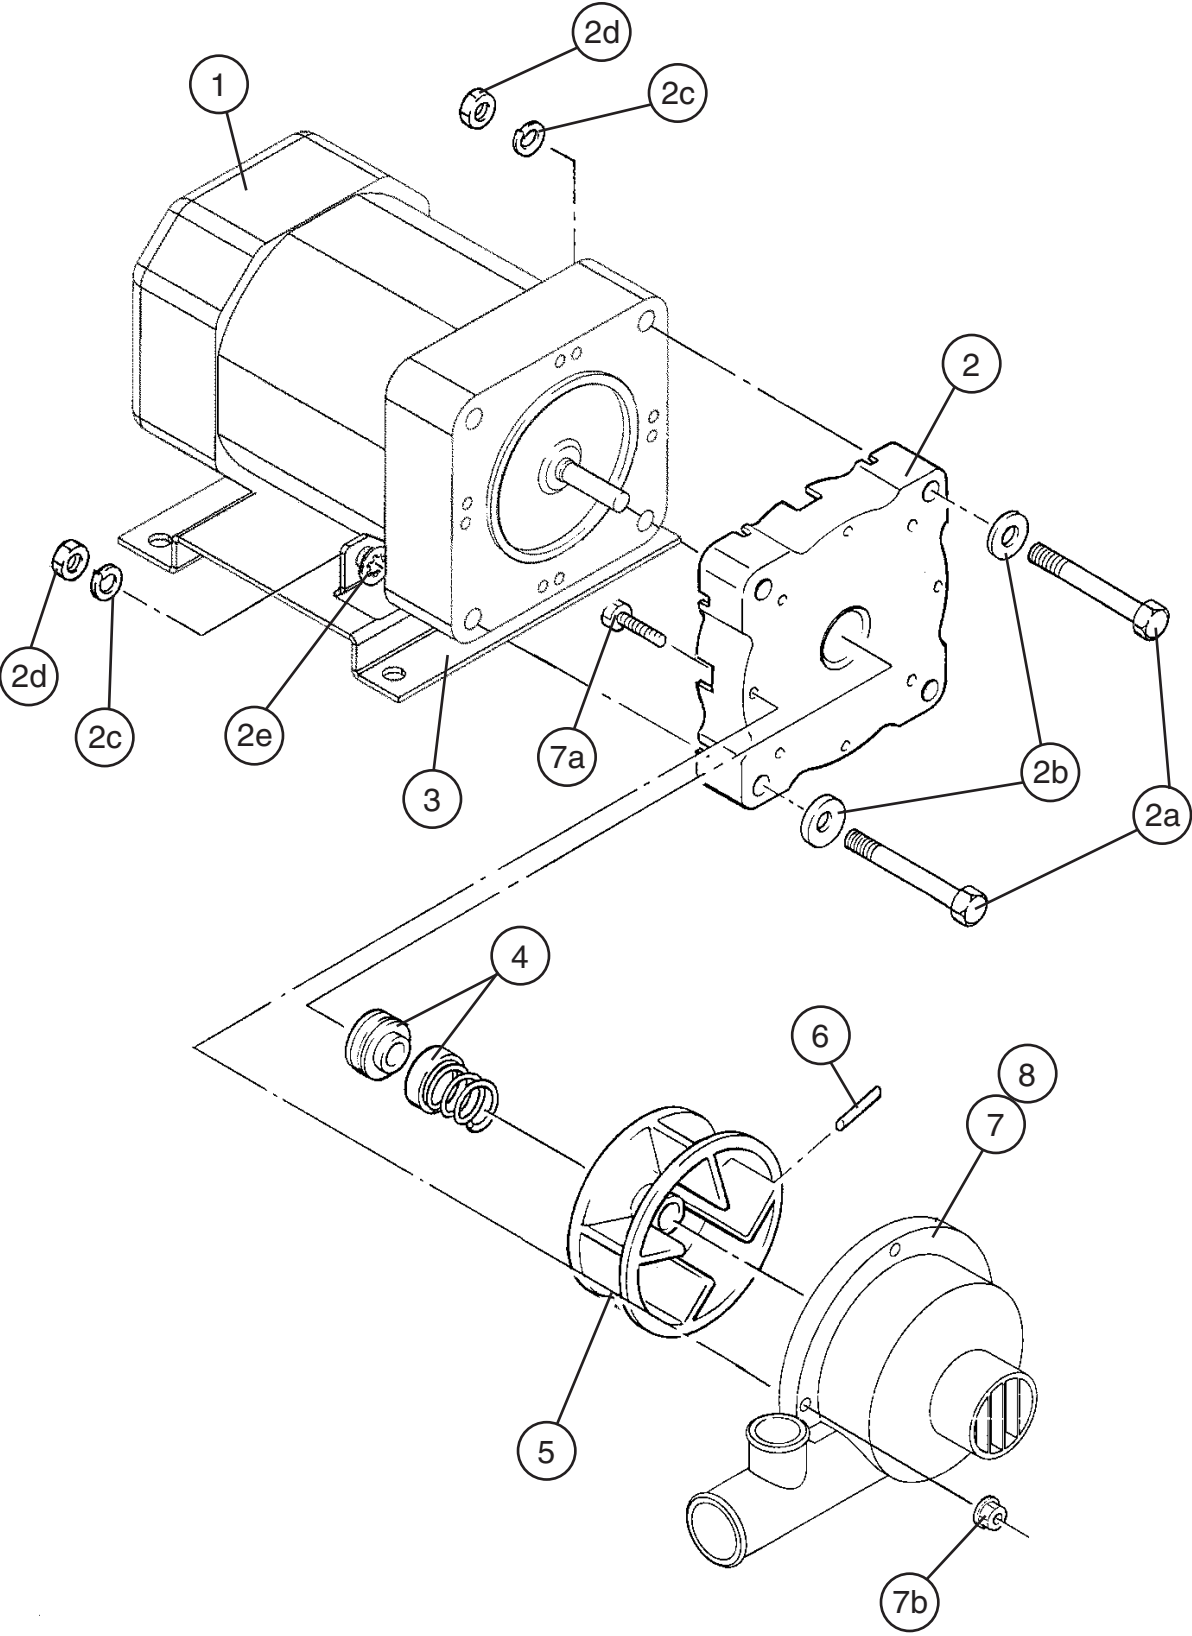


Title: F. Pump Motor Assembly Model: KMD-700MAH, MWH, MRH											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0 to P-3	Q-0	R-0 to T-0					
1	Pump Motor	-	2U0106-01	1	1	1					
2	Pump Flange	-	215662-01	1	1	1					
2a	Hexagon Bolt	6x40, SS	7B02-0640	4	4	4					
2b	Flat Washer	6, SS	7W22-0600	4	4	4					
2c	Split Lock Washer	6, SS	7L22-0600	4	4	4					
2d	Nut	6, SS	7N12-0600	4	4	4					
2e	Tooth Washer	6, SS	7R22-0600	2	2	2					
3	Pump Motor Bracket	SS	323904-01	1	1	1					
4	Mechanical Seal	H5-PN, 8 MM	428545-01	1	-						
	Mechanical Seal (R)	-	4A3820-01		1	1					
5	Impeller	ABS	428548-01	1	1	1					
6	Pin	SS	4A0648-01	1	1	1					
7	Pump Housing	-	2A2762-01	1	1	1					
7a	Hexagon Bolt	4x30, SS	7B02-0430	4	4	4					
7b	Flange Nut	4, SS	7J02-0400	4	4	4					
8	Packing	-	428547-01	1	1	1					

G. Accessories and Packaging

KMD-700MAH, MWH, MRH

N-0, N-1, P-0, P-1, P-2, P-3, Q-0, R-0, R-1, S-1, T-0

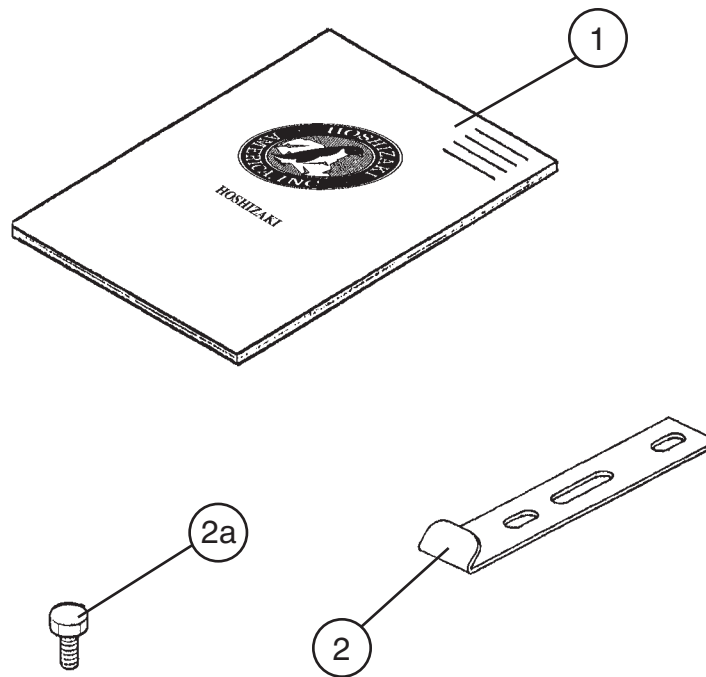

Title: G. Accessories and Packaging Model: KMD-700MAH, MWH, MRH											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0 N-1	P-0 to Q-0	R-0 to T-0					
1	Instruction Manual	PAPER	91A1QA10D	1	1	1					
2	Universal Brace	GS	4A0363-01	2	2	2					
2a	Hex Head Bolt	5x12, SS	7B02-0512	2	2	2					
Packaging (on models currently in production)			2A2126A05								
1	Pallet	-	2A0853-12	1	1	1					
2	Tray	-	2A2173-06	1	1	1					
3	Wood Block – B	-	4A0004-02	3	3	3					
4	Side Protector	-	4A2304-01	3	3	3					
5	Corner Post	-	3A0788-15	2	2	2					
6	Wood Block – C	-	4A0004-03	2	2	2					
7	Corner Post	-	3A0788-06	4	-						
			3A0788-17		4	4					
8	Side Protector	-	4A2304-02	2	2	2					
9	Carton	-	2A2125-08	1	1	1					