

Hoshizaki America, Inc.

Modular Crescent Cuber

Models

KMD-700MAH

KMD-700MWH

KMD-700MRH



“A Superior Degree
of Reliability”

www.hoshizaki.com

PARTS LIST



Number: 71221
Issued: 5-29-2003
Revised: 1-9-2008

CONTENTS

Auxiliary Codes.....	3
Note About Ordering Parts	3
Material Abbreviations	4
A. Ice Cuber Assembly	5
KMD-700MAH	5
KMD-700MWH	9
KMD-700MRH	13
B. Refrigeration Circuit.....	17
KMD-700MAH	17
KMD-700MWH	23
KMD-700MRH	29
C. Water Circuit.....	35
KMD-700MAH, MWH, MRH	35
D. Control Box Assembly	38
KMD-700MAH, MWH, MRH	38
E. Label Location	41
KMD-700MAH	41
KMD-700MWH	44
KMD-700MRH	47
F. Pump Motor Assembly	50
KMD-700MAH, MWH, MRH	50
G. Accessories and Packaging	52
KMD-700MAH, MWH, MRH	52

Auxiliary Codes

KMD-700MAH	N-0	April 2003
	N-1	September 2003
	P-0	December 2003
	P-2	February 2004
	P-3	June 2004
	Q-0	January 2005
	R-0	December 2005
	R-1	August 2006
	S-1	January 2007
	T-0	January 2008

KMD-700MWH	N-0	May 2003
	N-1	October 2003
	P-2	February 2004
	Q-0	April 2005
	R-0	January 2006
	R-1	August 2006
	S-1	February 2007
	T-0	February 2008

KMD-700MRH	N-0	May 2003
	N-1	September 2003
	P-1	December 2003
	P-2	January 2004
	Q-0	April 2005
	R-0	January 2006
	R-1	September 2006
	S-1	January 2007
	T-0	January 2008

Auxiliary Code Breakdown

K-0

- └─ Designates the year. "K" indicates the year 2000. Years progress or regress in alphabetical order.
 - └─ "J" is 1999, "L" is 2001, "M" is 2002, and so on. The letters "I" and "O" were skipped.
- └─ Designates significant part changes within the same year for this model. Base is 0 and this number advances for each change.

Example: P-1

- └─ "P" indicates 2004.
 - └─ "1" indicates the first significant part change for 2004.

Note About Ordering Parts

Most assemblies cannot be ordered as complete units; parts in the assemblies generally must be ordered separately.

Material Abbreviations

ALUMINUM

AL = Aluminum

COPPER

CU = Copper

PLASTIC

ABS = Acrylonitrile -butadiene - styrene
AC = Polyacetal
EVA = Ethylene vinyl acetate
PA = Polyamide = Nylon
PC = Polycarbonate
PE = Polyethylene
PES = Polyester
PETP = Polyethylene terephthalate = Tetlon
PP = Polypropylene
PS = Polystyrene
PTFE = Polytetrafluoroethylene = Teflon
PUR = Polyurethane
PVC = Polyvinyl chloride


RUBBER

VN = Vinyl Nitrile
EPDM = EP rubber
NBR = Nitrile butadiene rubber
NR = Natural rubber
NP = Neoprene
SI.R = Silicone rubber
SY.R = Synthetic rubber
EPH = Epichlorohydrin

STEEL

GS = Galvanized steel
SS = Stainless steel
PS = Plated steel
PAS = Primed steel


A. Ice Cuber Assembly
KMD-700MAH
 N-0

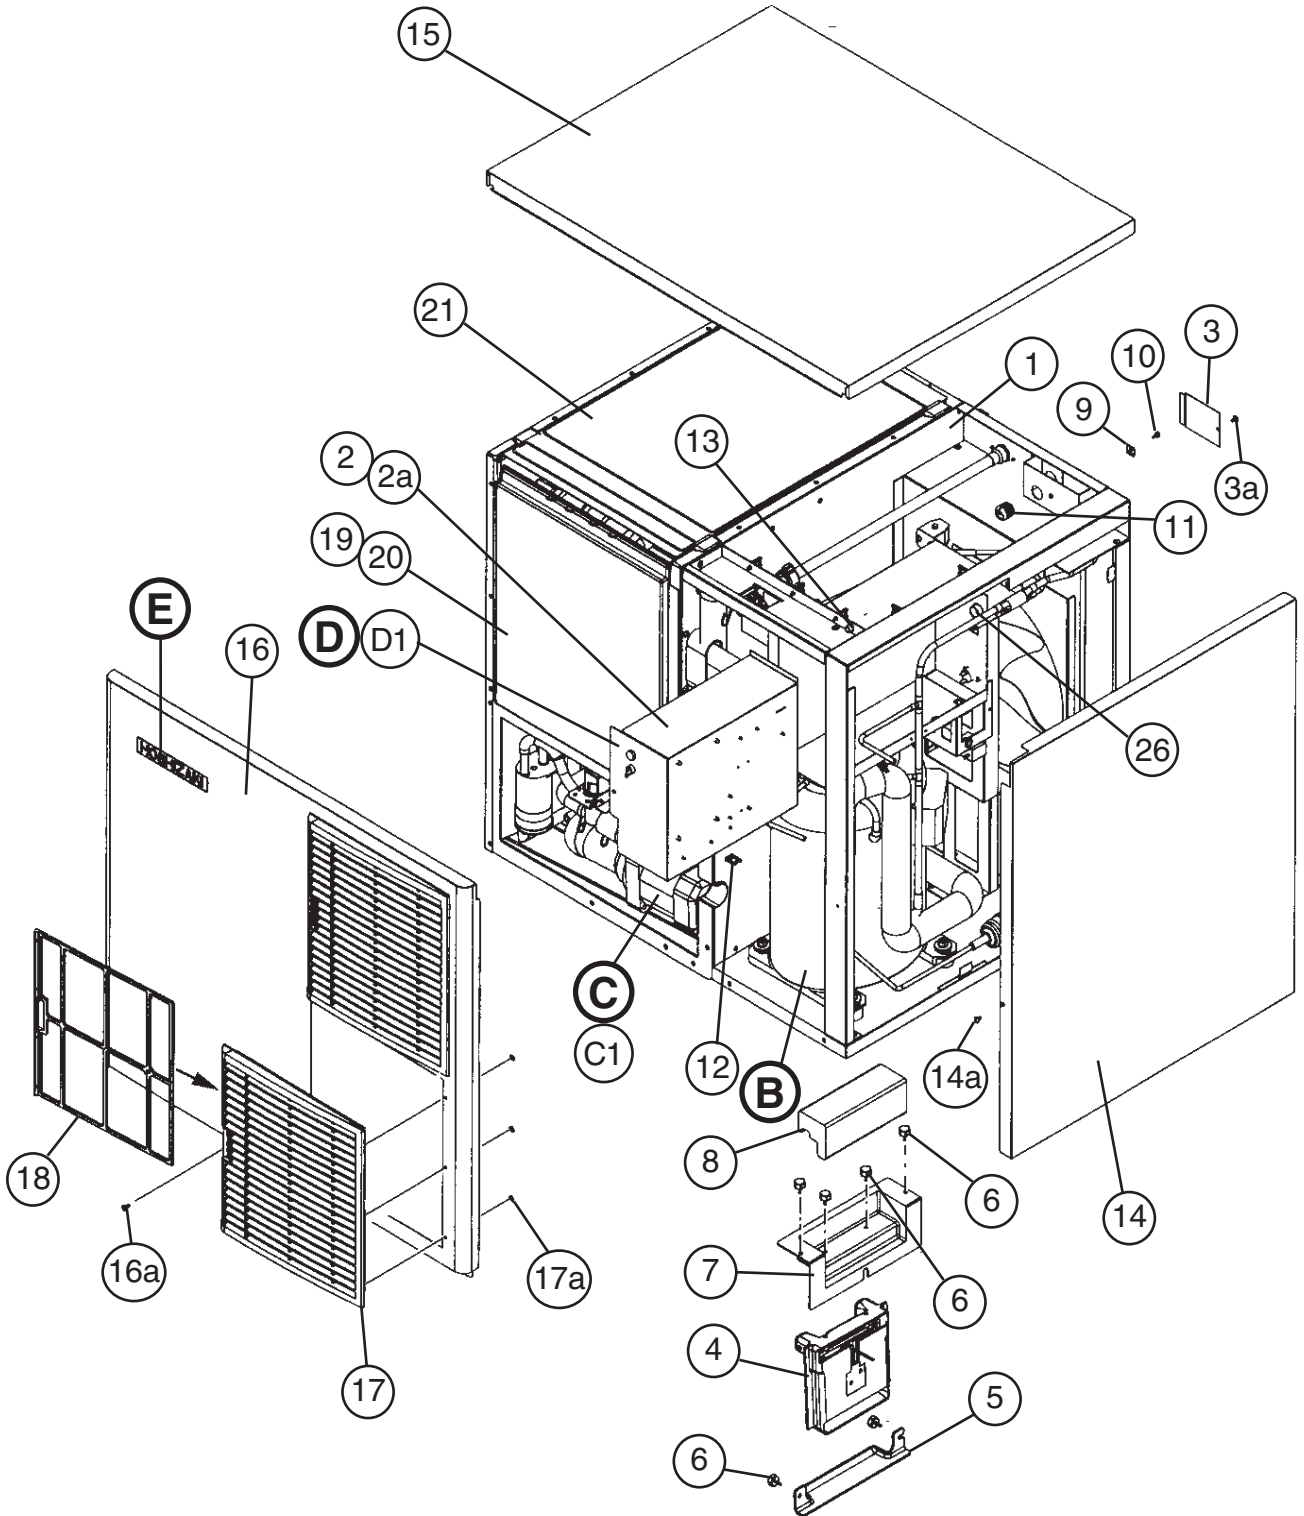

A. Ice Cuber Assembly

KMD-700MAH


N-1, P-0, P-2, P-3, Q-0, R-0, R-1, S-1, T-0

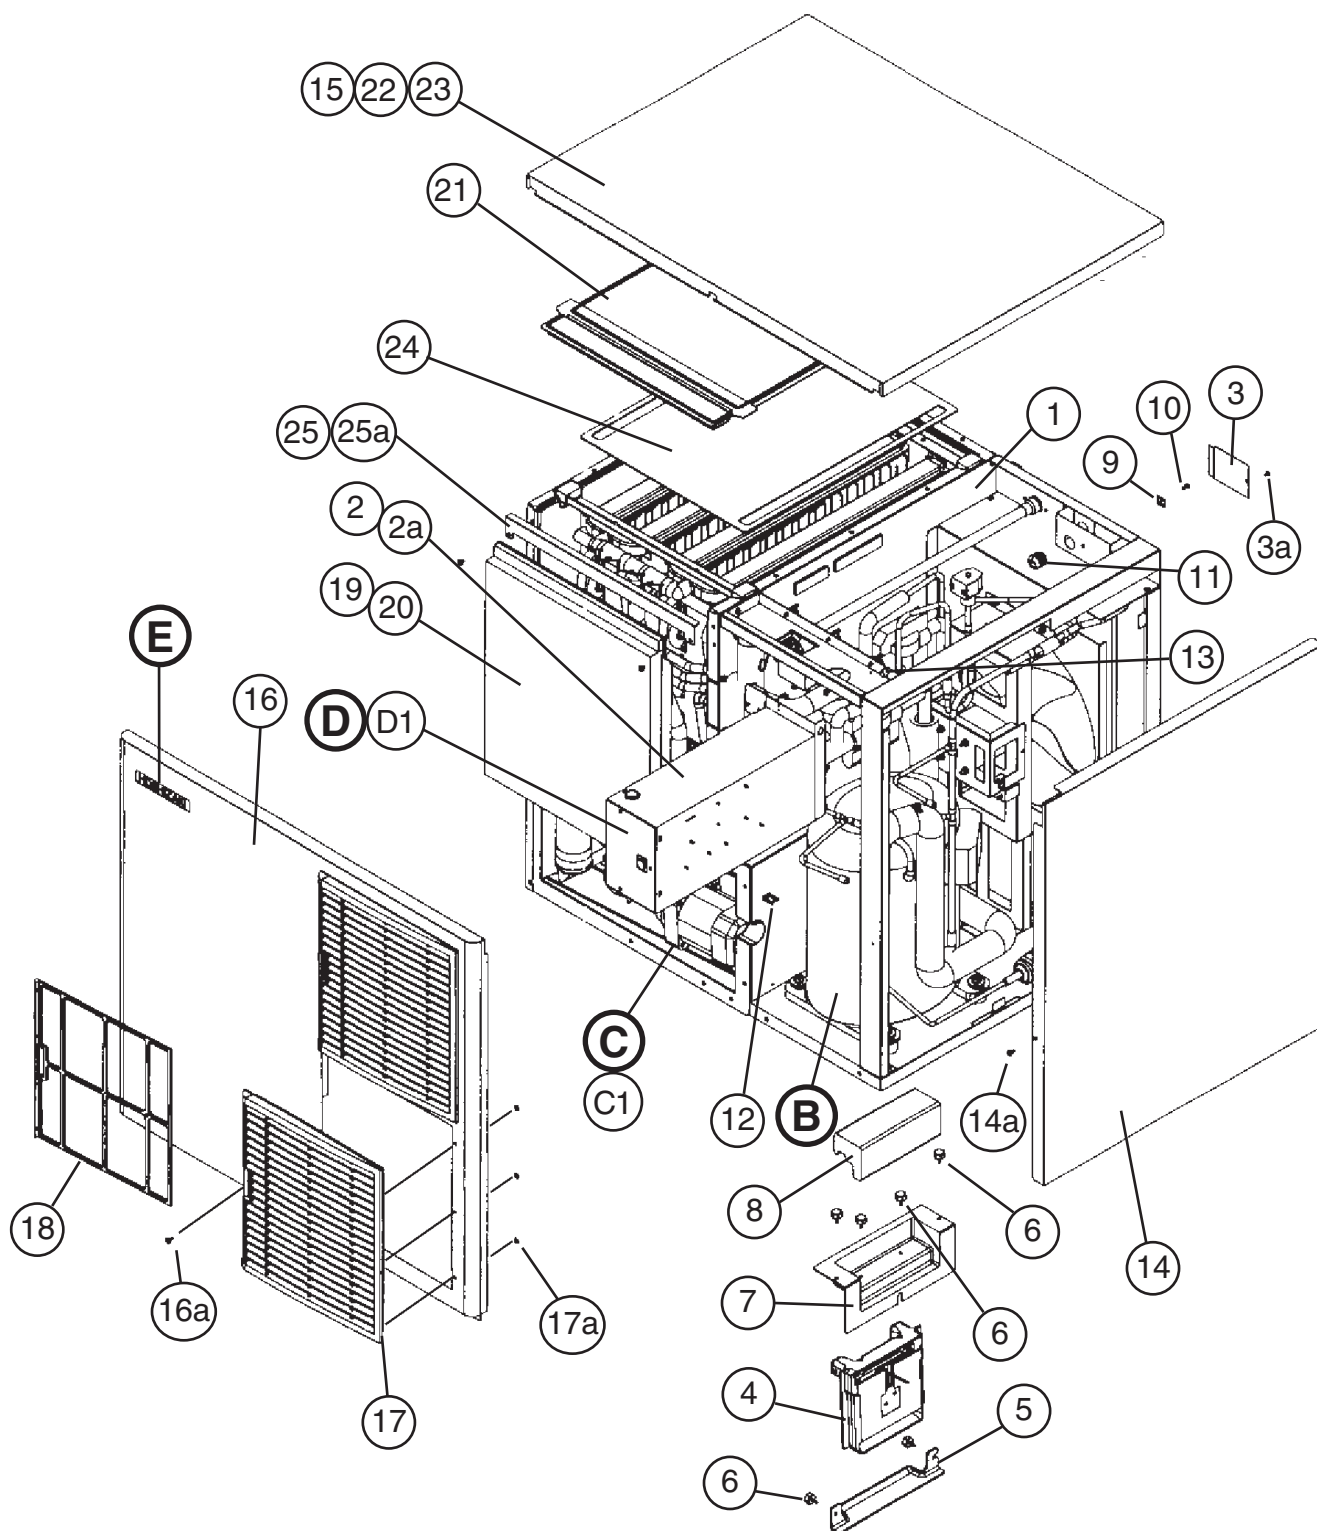

Title: A. Ice Cuber Assembly Model: KMD-700MAH													
Index No.	Description	Material or Model Number	Part Number	Required Number									
				N-0	N-1 P-0	P-2 to Q-0	R-0 to T-0						
B	Refrigeration Circuit	-	1A0799A01	1	-								
			1A0881A01		1	1	1						
C	Water Circuit	-	1A0800A01	1	-								
			1A0800A02		1	-							
			1A0800A03			1	1						
C1	Truss Head Screw	4x10, SS	7C32-0410	1	1	1	1						
D	Control Box Assembly	-	2A2818A01	1	1	-							
			2A3051A01			1	1						
D1	T2 Screw	4x8	7P31-0408	1	1	-							
						3	3						
E	Label Location	-	2A2819A01	1	1	1	1						
1	Evaporator Case	-	1A0790G01	1	-								
			1A0857G01		1	1	1						
2	Control Box Cover	GS	3A2687G01	1	1	-							
			3A2371-01			1	1						
2a	T2 Screw	4x8	7P31-0408	3	3	3	3						
3	Junction Box Cover	GS	433410-01	1	1	1	1						
3a	T2 Screw	4x8	7P31-0408	1	1	1	1						
4	Bin Control	-	464574-01	1	1	1	1						
5	Switch Guide	-	3A2643-01	1	1	1	1						
6	Thumbscrew	Black	415949G10	6	6	6	6						
7	Switch Cover	-	3A2642-01	1	1	1	1						
8	Insulation Switch	-	4A3068-01	1	1	1	1						
9	Square Washer	-	433537-01	1	-								
			433537-02		1	1	1						
10	Screw – Grounding	-	433304-02	1	1	1	1						
11	Bushing	SR-34-2	420472-05	1	1	1	1						
12	Wire Saddle	VS-4238-M	4A0338-02	9	9	9	9						
13	Bushing	OCB-500	428394-02	2	2	2	2						
14	Side Panel (R)	SS	2A2800G01	1	1	1	1						
14a	Truss Head Screw	4x10, SS	7C32-0410	1	1	1	1						
15	Top Panel	SS	2A2801-01	1	-								
	Top Panel Assembly		2A2955G01		1	1	1						
16	Front Panel	SS	2A2802-01	1	-								
	Front Panel Assembly		2A2958G01		1	1	1						
16a	Truss Head Screw	4x10, SS	7C32-0410	1	1	1	1						
17	Louver A	-	1A0547-01	2	2	2	2						
17a	Push Retainer	-	4A2414-01	6	6	6	6						
18	Air Filter A	-	2A2062G01	2	2	2	2						
19	Front Insulation	-	3A2722G01	1	-								
			3A2933G01		1	1	1						
20	Thumbscrew	-	415949G01	1	1	1	1						
21	Top Insulation	-	3A2723G01	1	-								
			3A2934G01		1	1	1						

Title: A. Ice Cuber Assembly Model: KMD-700MAH											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0	N-1 P-0	P-2 to Q-0	R-0 to T-0				
22	Top Panel Insulation (B2)	-	3A2928-02	-	1	1	1				
23	Top Panel Insulation (B3)	-	3A2928-03	-	1	1	1				
24	Top Cover	ABS	3A2922-01	-	1	1	1				
25	Front Insulation Bracket	GS	3A2909-01	-	1	1	1				
25a	T2 Screw	4x8, SS	7P32-0408	-	2	2	2				
26	Bushing	OCB-875	428394-04	2	2	-					


A. Ice Cuber Assembly
KMD-700MWH
 N-0

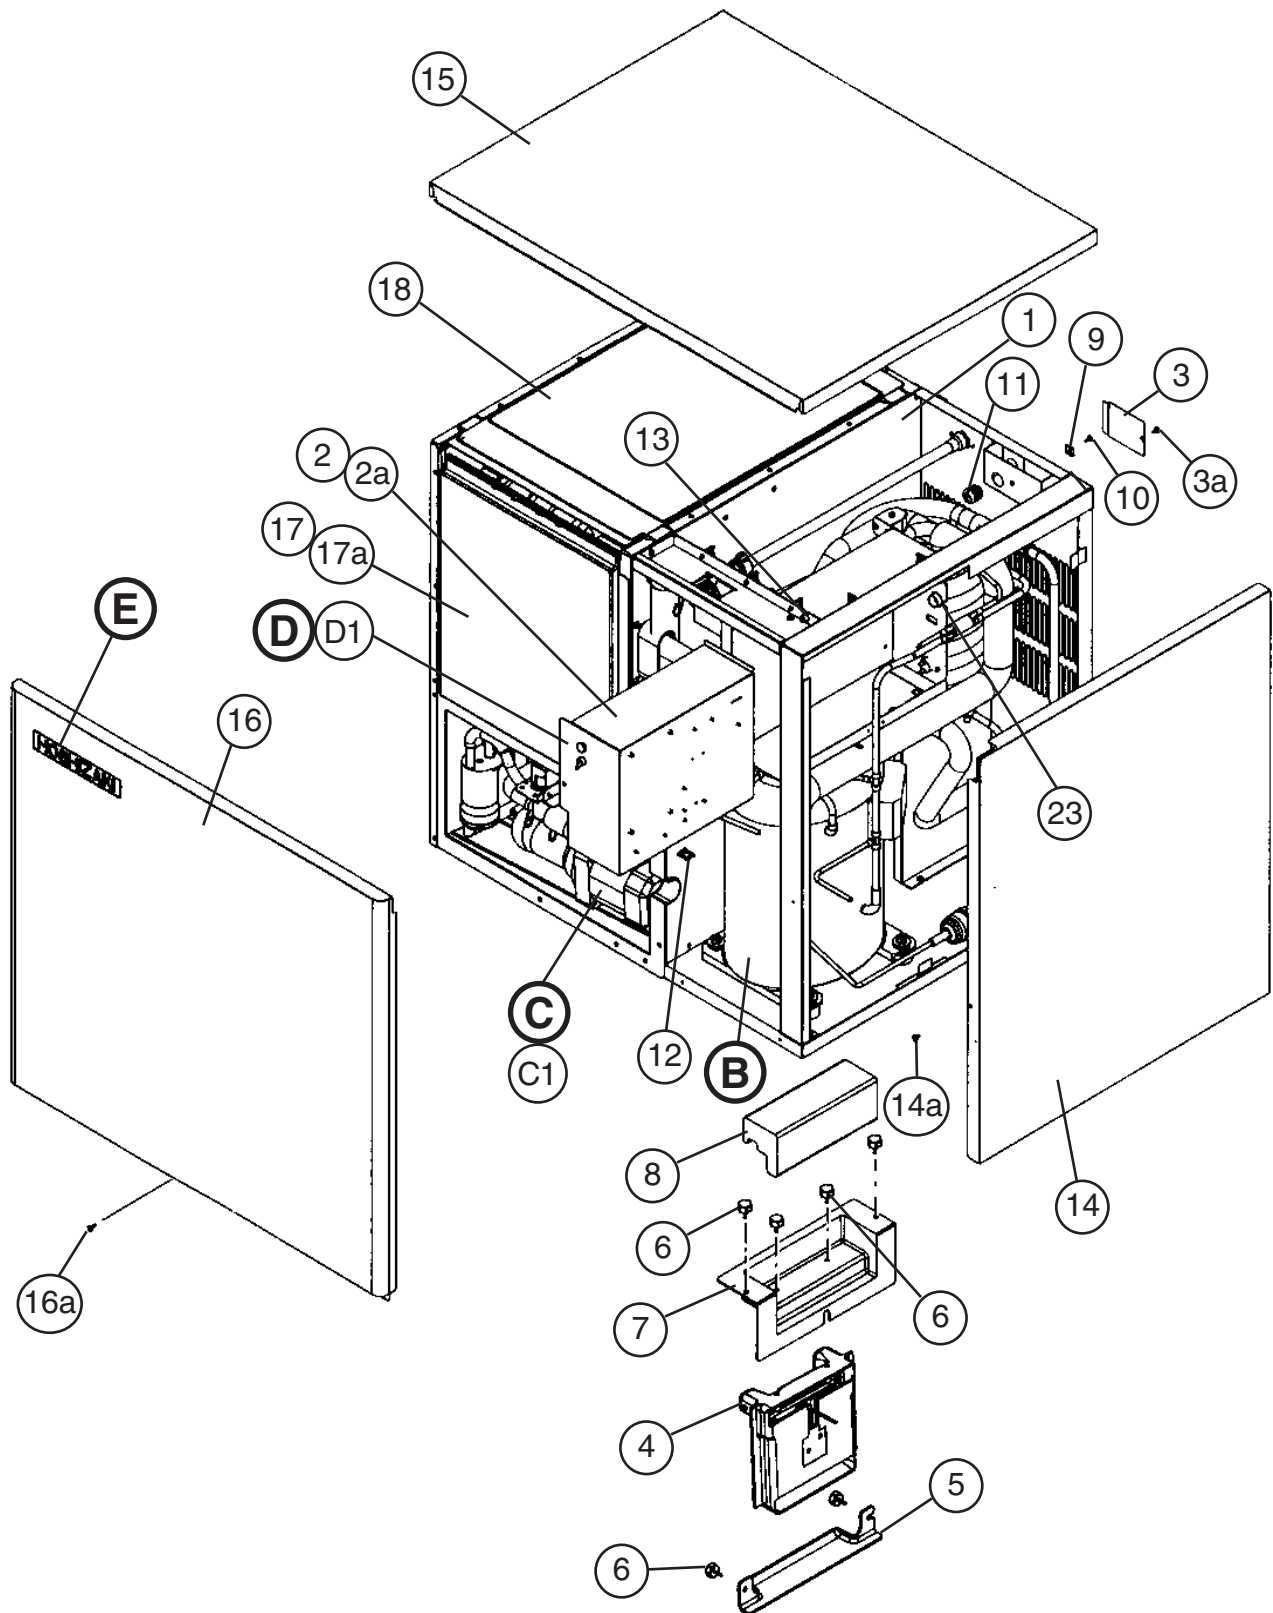

A. Ice Cuber Assembly

KMD-700MWH


N-1, P-2, Q-0, R-0, R-1, S-1, T-0

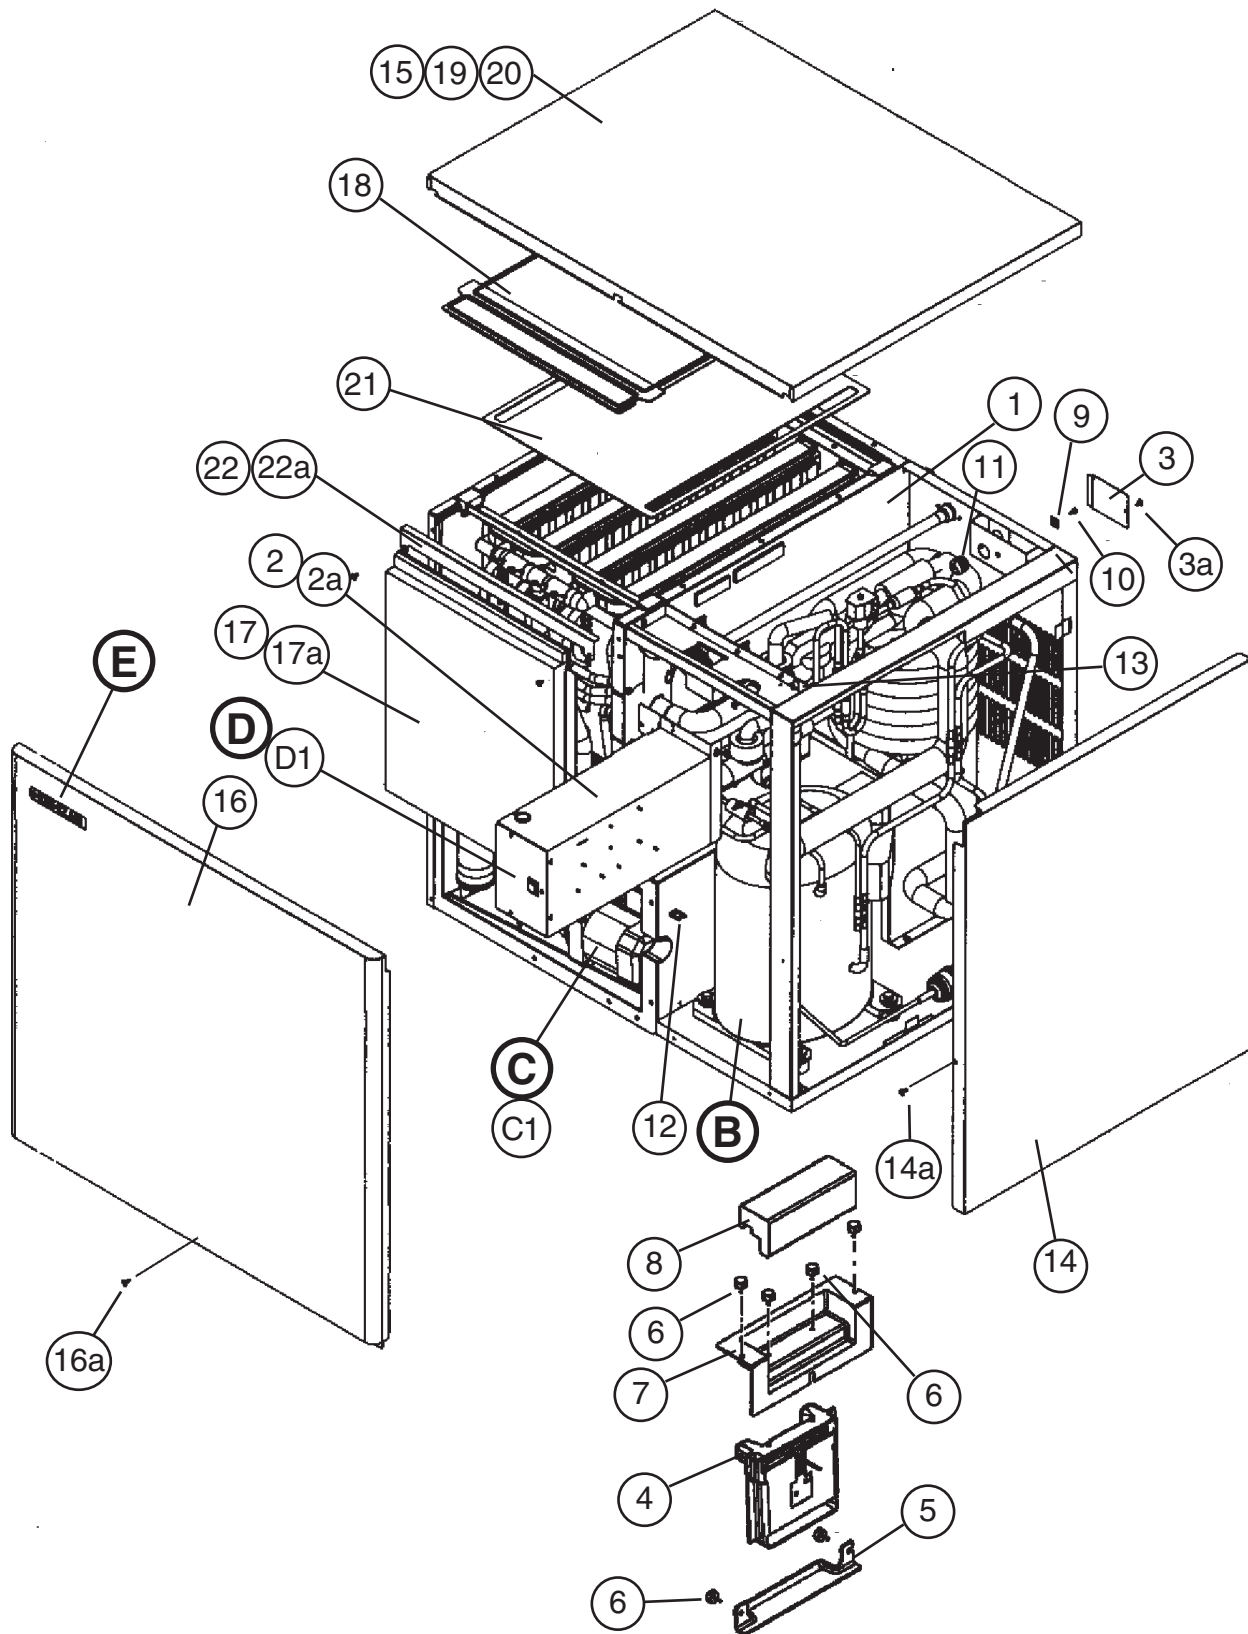

Title: A. Ice Cuber Assembly Model: KMD-700MWH											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0	N-1	P-2 Q-0	R-0 to T-0				
B	Refrigeration Circuit	-	1A0815A01	1	-						
			1A0902A01		1	1	1				
C	Water Circuit	-	1A0800A01	1	-						
			1A0800A02		1	-					
			1A0800A03			1	1				
C1	Truss Head Screw	4x8, SS	7C32-0408	2	2	2	2				
D	Control Box Assembly	-	2A2818A01	1	1	-					
			2A3051A01			1	1				
D1	T2 Screw	4x8	7P31-0408	1	1	-					
						3	3				
E	Label Location	-	2A2839A01	1	1	1	1				
1	Evaporator Case	-	1A0790G02	1	-						
			1A0857G02		1	-					
			1A0857G01			1	1				
2	Control Box Cover	GS	3A2687G01	1	1	-					
			3A2371-01			1	1				
2a	T2 Screw	4x8	7P31-0408	3	3	3	3				
3	Junction Box Cover	GS	433410-01	1	1	1	1				
3a	T2 Screw	4x8	7P31-0408	1	1	1	1				
4	Bin Control	-	464574-01	1	1	1	1				
5	Switch Guide	-	3A2643-01	1	1	1	1				
6	Thumbscrew	-	415949G10	6	6	6	6				
7	Switch Cover	-	3A2642-01	1	1	1	1				
8	Insulation Switch	-	4A3068-01	1	1	1	1				
9	Square Washer	-	433537-01	1	-						
			433537-02		1	1	1				
10	Screw – Grounding	-	433304-02	1	1	1	1				
11	Bushing	SR-34-2	420472-05	1	1	1	1				
12	Wire Saddle	VS-4238-M	4A0338-02	9	9	9	9				
13	Bushing	OCB-500	428394-02	1	1	1	1				
14	Side Panel (R)	SS	2A2800G01	1	1	1	1				
14a	Truss Head Screw	4x8, SS	7C32-0408	1	1	1	1				
	Top Panel		2A2801-01	1	-						
	Top Panel Assembly		2A2955G01		1	1	1				
16	Front Panel	SS	2A2802-02	1	-						
	Front Panel Assembly		2A2956G01		1	1	1				
16a	Truss Head Screw	4x10, SS	7C32-0410	1	1	1	1				
17	Front Insulation	-	3A2722G01	1	-						
			3A2933G01		1	1	1				
17a	Thumbscrew	-	415949G01	1	1	1	1				
18	Top Insulation	-	3A2723G01	1	-						
			3A2934G01		1	1	1				
19	Top Panel Insulation (B2)	-	3A2928-02	-	1	1	1				
20	Top Panel Insulation (B3)	-	3A2928-03	-	1	1	1				


Title: A. Ice Cuber Assembly Model: KMD-700MWH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0	N-1	P-2 Q-0	R-0 to T-0					
21	Top Cover	ABS	3A2922-01	-	1	1	1					
22	Front Insulation Bracket	GS	3A2909-01	-	1	1	1					
22a	T2 Screw	4x8, SS	7P32-0408	-	2	2	2					
23	Bushing	OCB-875	428394-04	2	2	-						

A. Ice Cuber Assembly
KMD-700MRH
 N-0

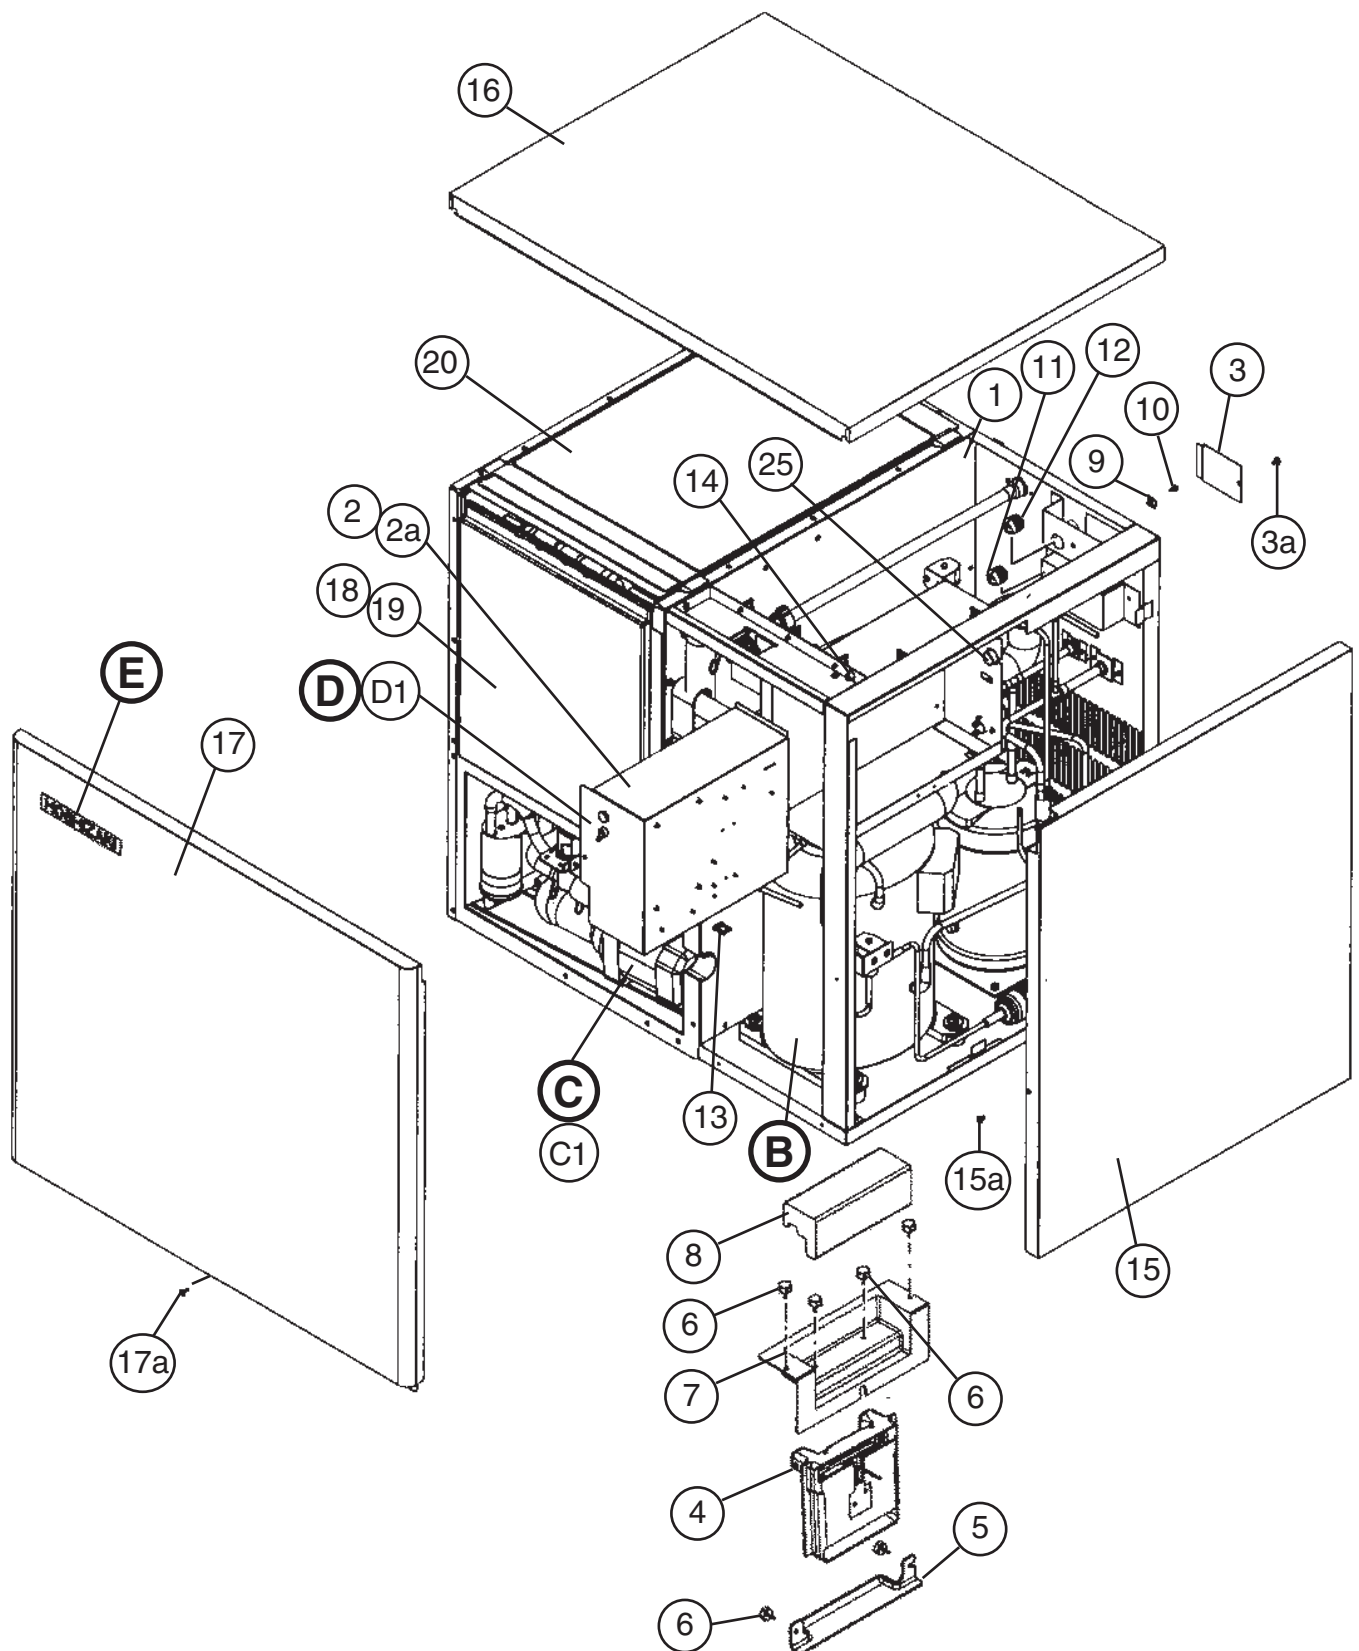

A. Ice Cuber Assembly
KMD-700MRH

N-1, P-1, P-2, Q-0, R-0, R-1, S-1, T-0

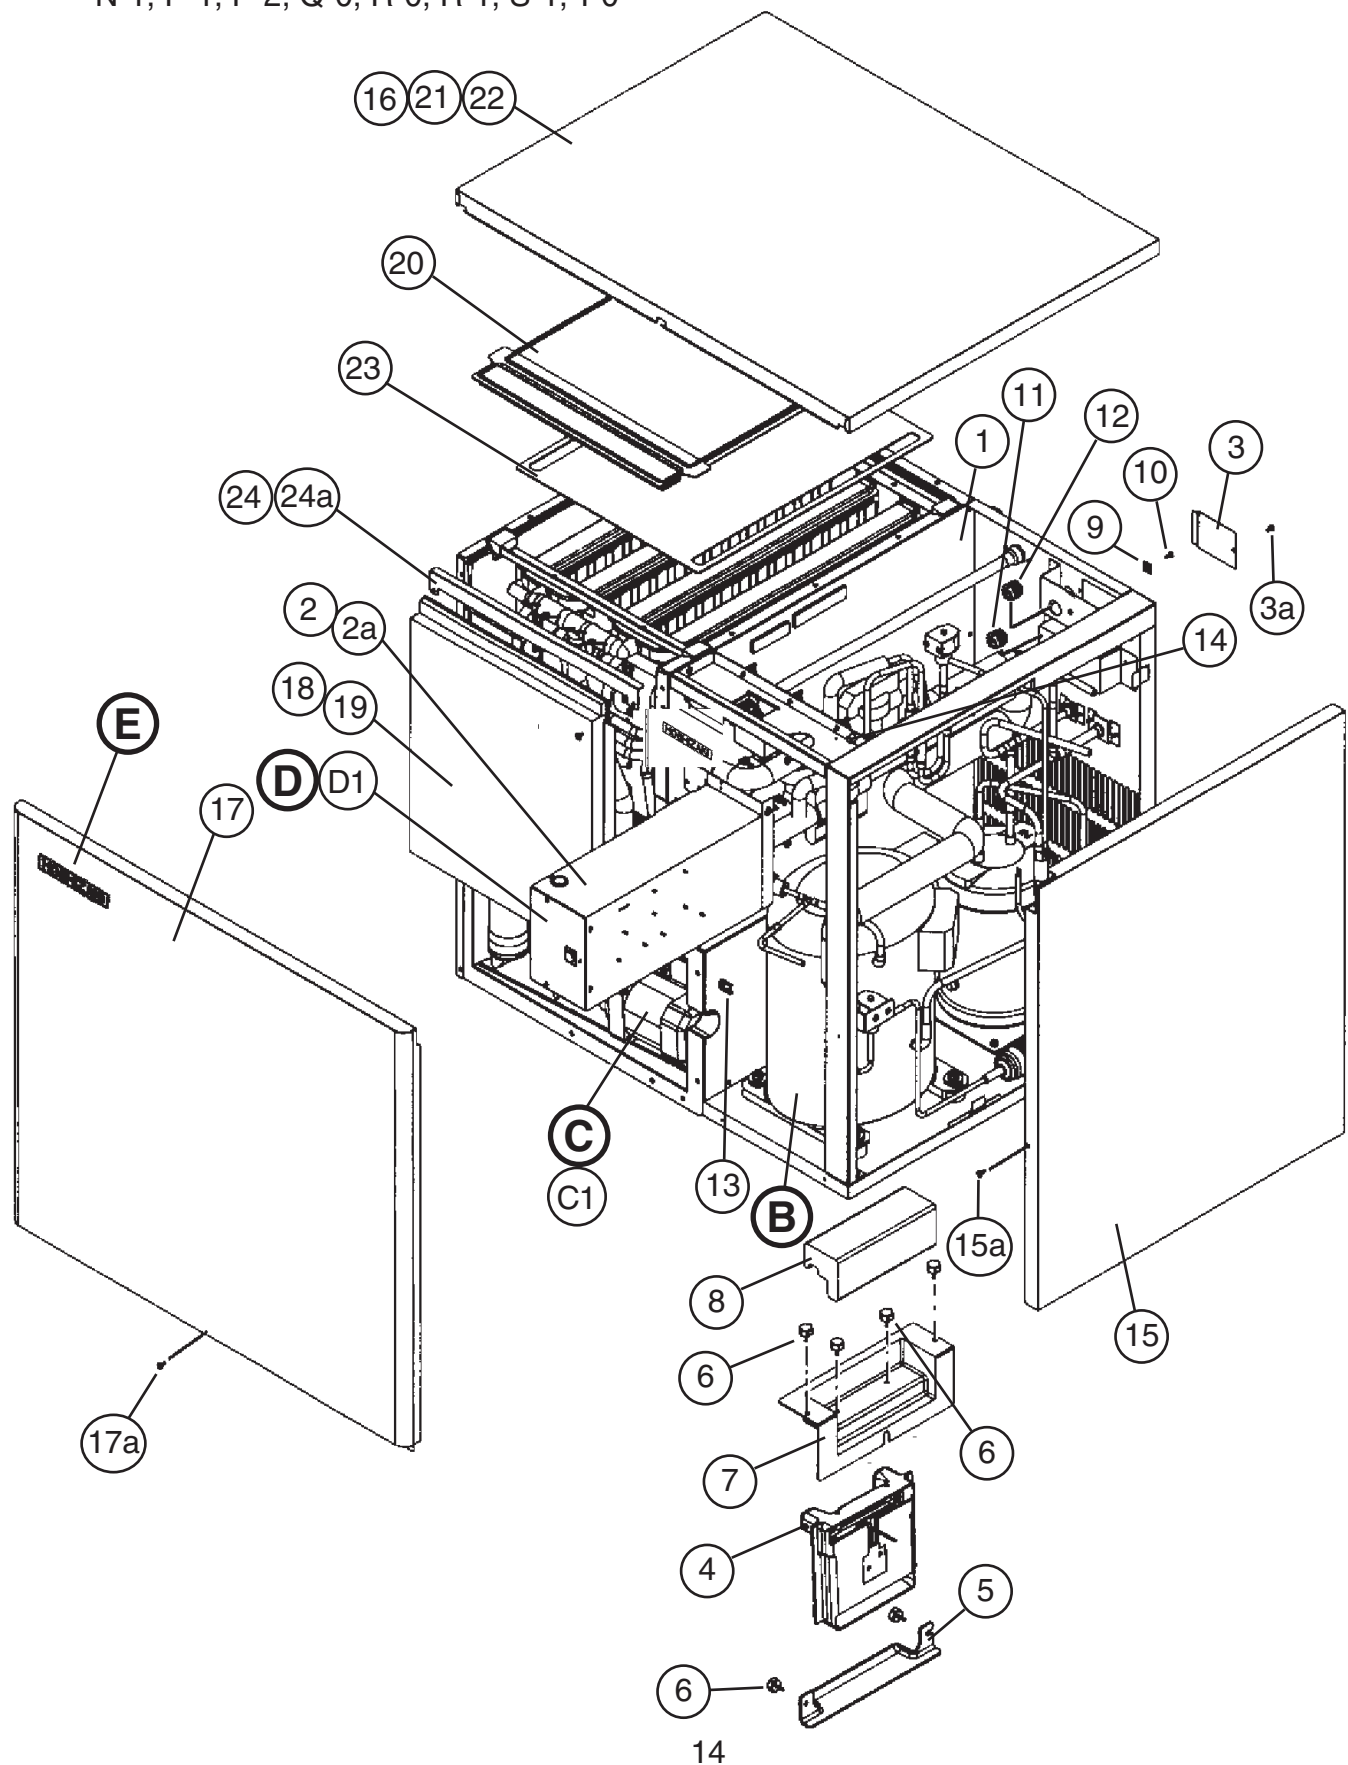


Title: **A. Ice Cuber Assembly** Model: **KMD-700MRH**


Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0	N-1 P-1	P-2 to Q-0	R-0 to T-0				
B	Refrigeration Circuit	-	1A0801A01	1	-						
			1A0900A01		1	1	1				
C	Water Circuit	-	1A0800A01	1	-						
			1A0800A02		1	-					
			1A0800A03			1	1				
C1	Truss Head Screw	4x8, SS	7C32-0408	1	1	1	1				
D	Control Box Assembly	-	2A2818A01	1	1	-					
			2A3051A01			1	1				
D1	T2 Screw	4x8	7P31-0408	1	1	3	3				
E	Label Location	-	2A2765A01	1	1	1	1				
1	Evaporator Case	-	1A0790G03	1	-						
			1A0857G03		1	-					
			1A0857G01			1	1				
2	Control Box Cover	GS	3A2687G01	1	1	-					
			3A2371-01			1	1				
2a	T2 Screw	4x8	7P31-0408	3	3	3	3				
3	Junction Box Cover	GS	433410-01	1	1	1	1				
3a	T2 Screw	4x8	7P31-0408	2	2	2	2				
4	Bin Control	-	464574-01	1	1	1	1				
5	Switch Guide	-	3A2643-01	1	1	1	1				
6	Thumbscrew	-	415949G10	6	6	6	6				
7	Switch Cover	-	3A2642-01	1	1	1	1				
8	Insulation Switch	-	4A3068-01	1	1	1	1				
9	Square Washer	-	433537-01	1	-						
			433537-02		1	1	1				
10	Screw – Grounding	-	433304-02	1	1	1	1				
11	Bushing	SR-34-2	420472-05	1	1	1	1				
12	Bushing	SR-30-1	420472-03	1	1	1	1				
13	Wire Saddle	VS-4238-M	4A0338-02	9	9	9	9				
14	Bushing	OCB-500	428394-02	1	1	1	1				
15	Side Panel (R)	SS	2A2800G01	1	1	1	1				
15a	Truss Head Screw	4x8, SS	7C32-0408	1	1	1	1				
16	Top Panel	SS	2A2801-01	1	-						
	Top Panel Assembly		2A2955G01		1	1	1				
17	Front Panel	SS	2A2802-02	1	-						
	Front Panel Assembly		2A2956G01		1	1	1				
17a	Truss Head Screw	4x10, SS	7C32-0410	1	1	1	1				
18	Front Insulation	-	3A2722G01	1	-						
			3A2933G01		1	1	1				
19	Thumbscrew	-	415949G01	1	1	1	1				
20	Top Insulation	-	3A2723G01	1	-						
			3A2934G01		1	1	1				
21	Top Panel Insulation (B2)	-	3A2928-02	-	1	1	1				
22	Top Panel Insulation (B3)	-	3A2928-03	-	1	1	1				

Title: A. Ice Cuber Assembly Model: KMD-700MRH											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0	N-1 P-1	P-2 to Q-0	R-0 to T-0				
23	Top Cover	ABS	3A2922-01	-	1	1	1				
24	Front Insulation Bracket	GS	3A2909-01	-	1	1	1				
24a	T2 Screw	4x8, SS	7P32-0408	-	2	2	2				
25	Bushing	OCB-875	428394-04	2	2	-					

B. Refrigeration Circuit
KMD-700MAH
1/2
N-0

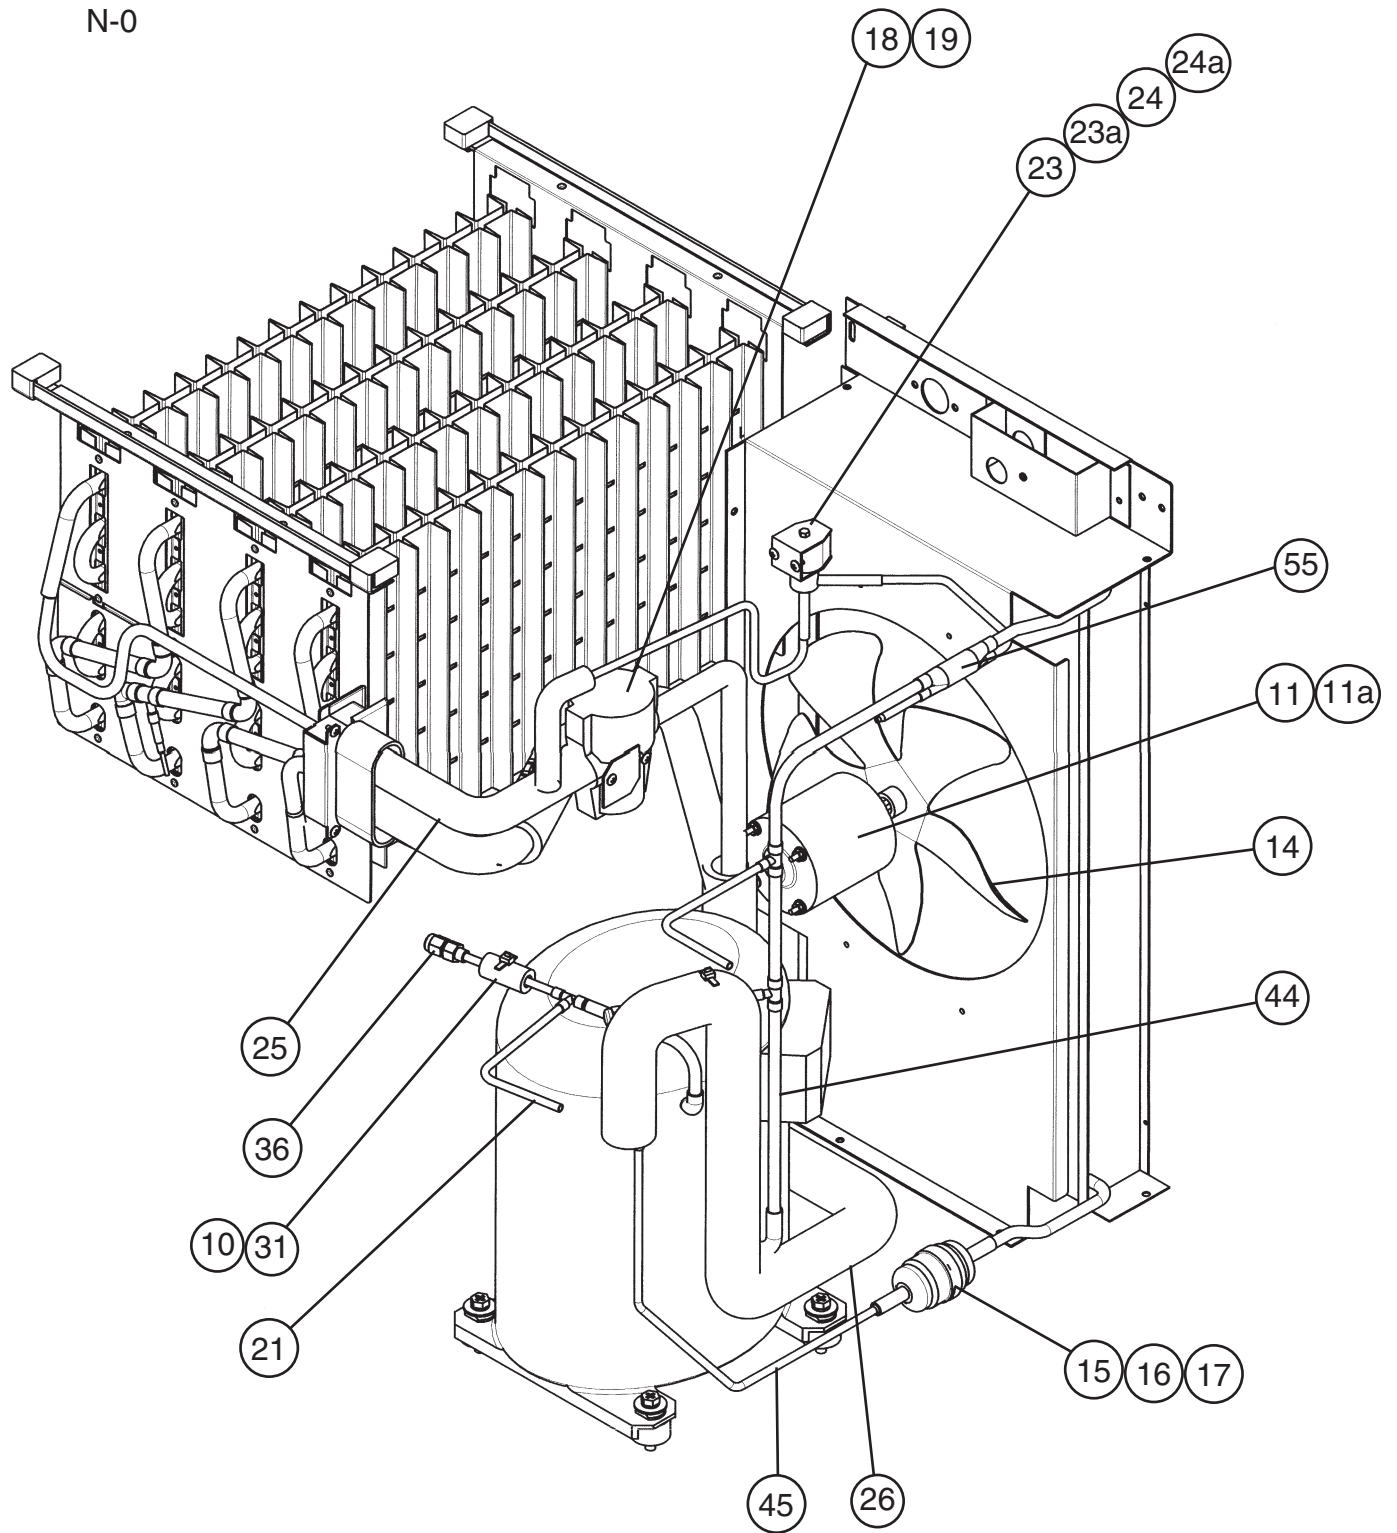

B. Refrigeration Circuit
KMD-700MAH
2/2
N-0

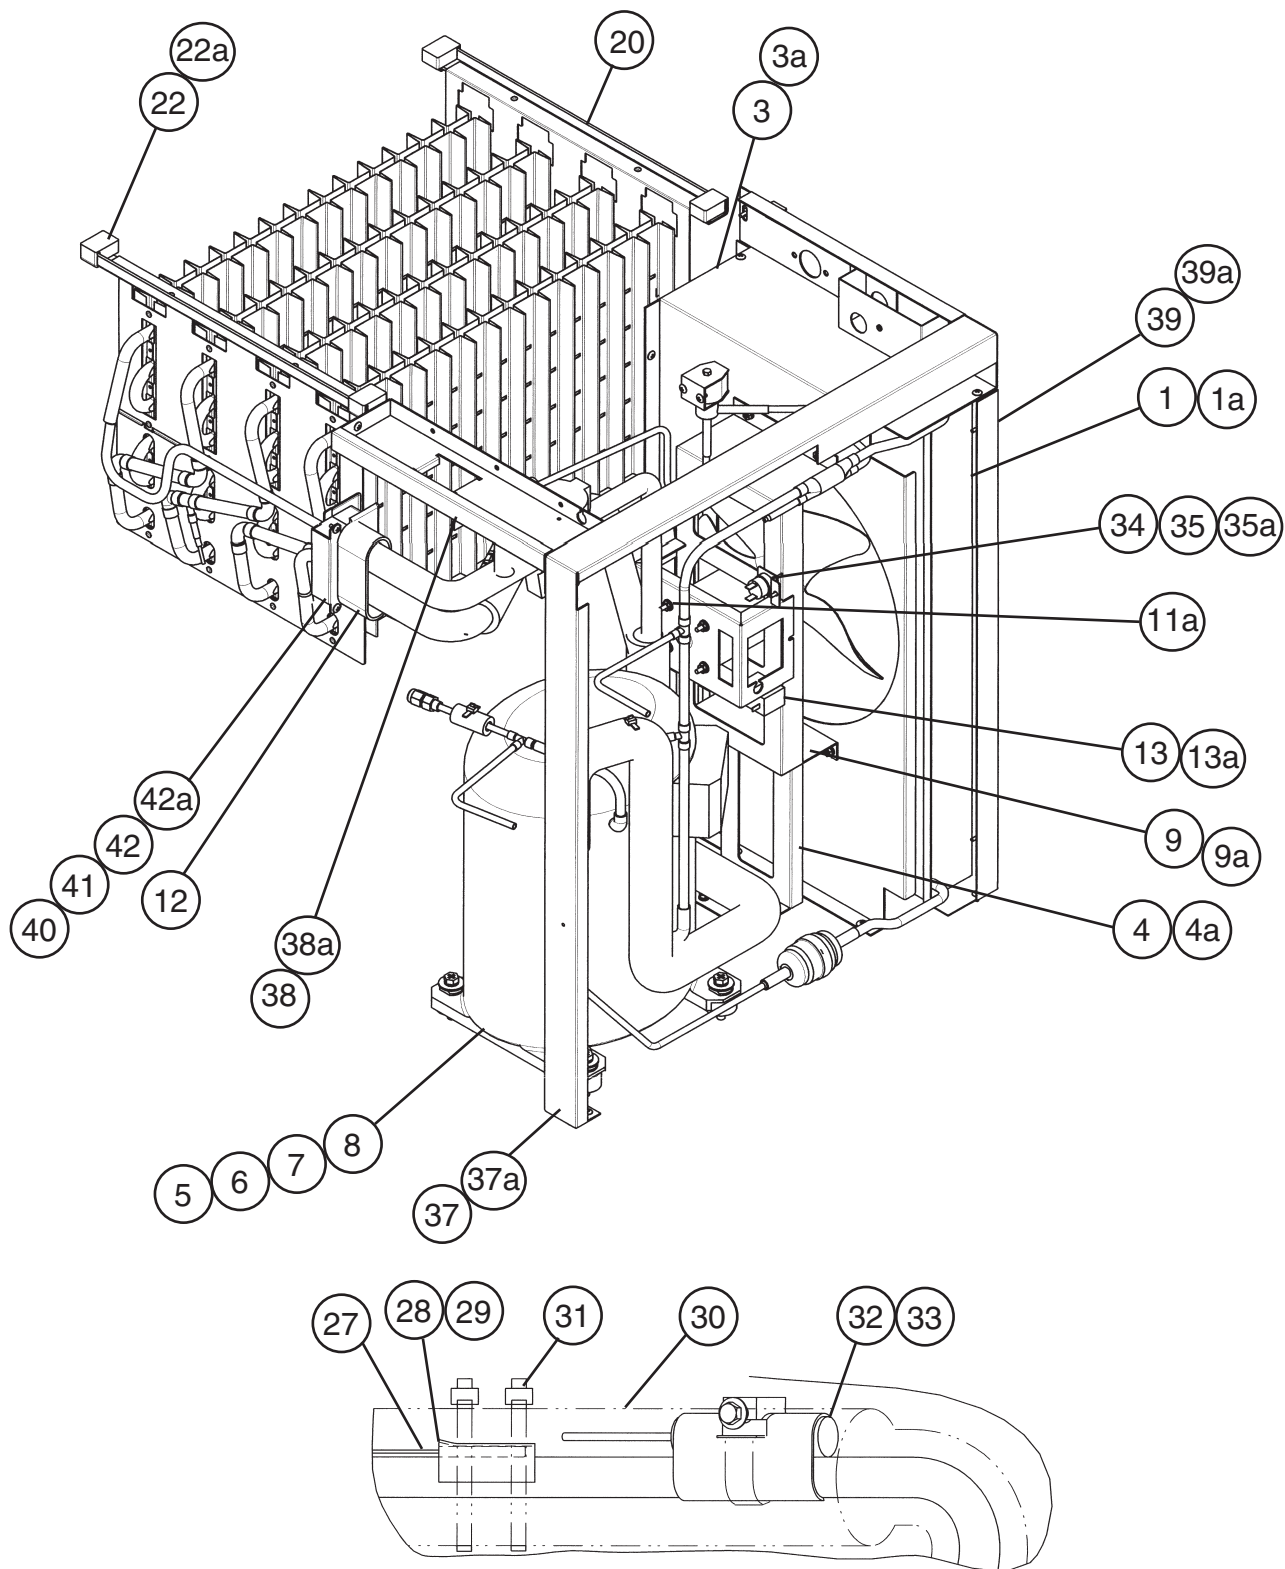




DETAILED THERMISTOR ATTACHMENT

B. Refrigeration Circuit

KMD-700MAH

1/2

N-1, P-0, P-2, P-3, Q-0, R-0, R-1, S-1, T-0

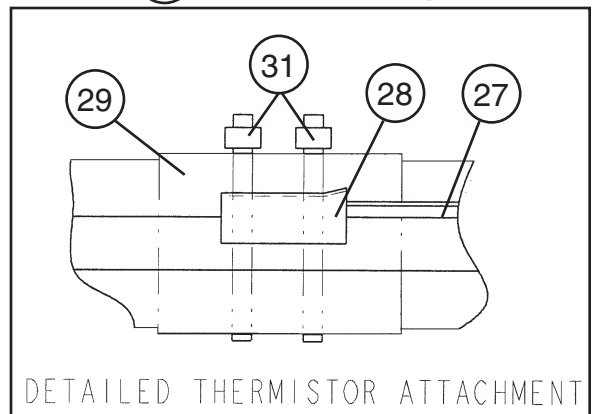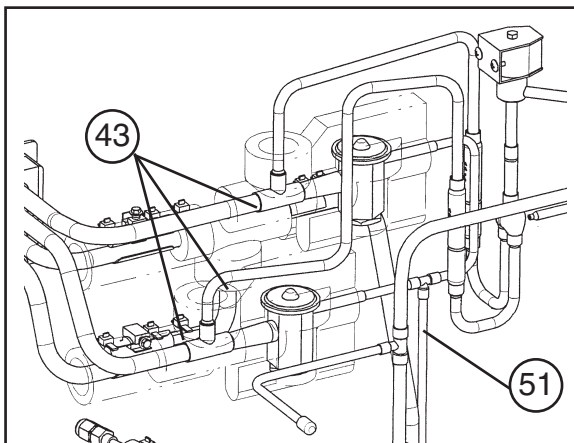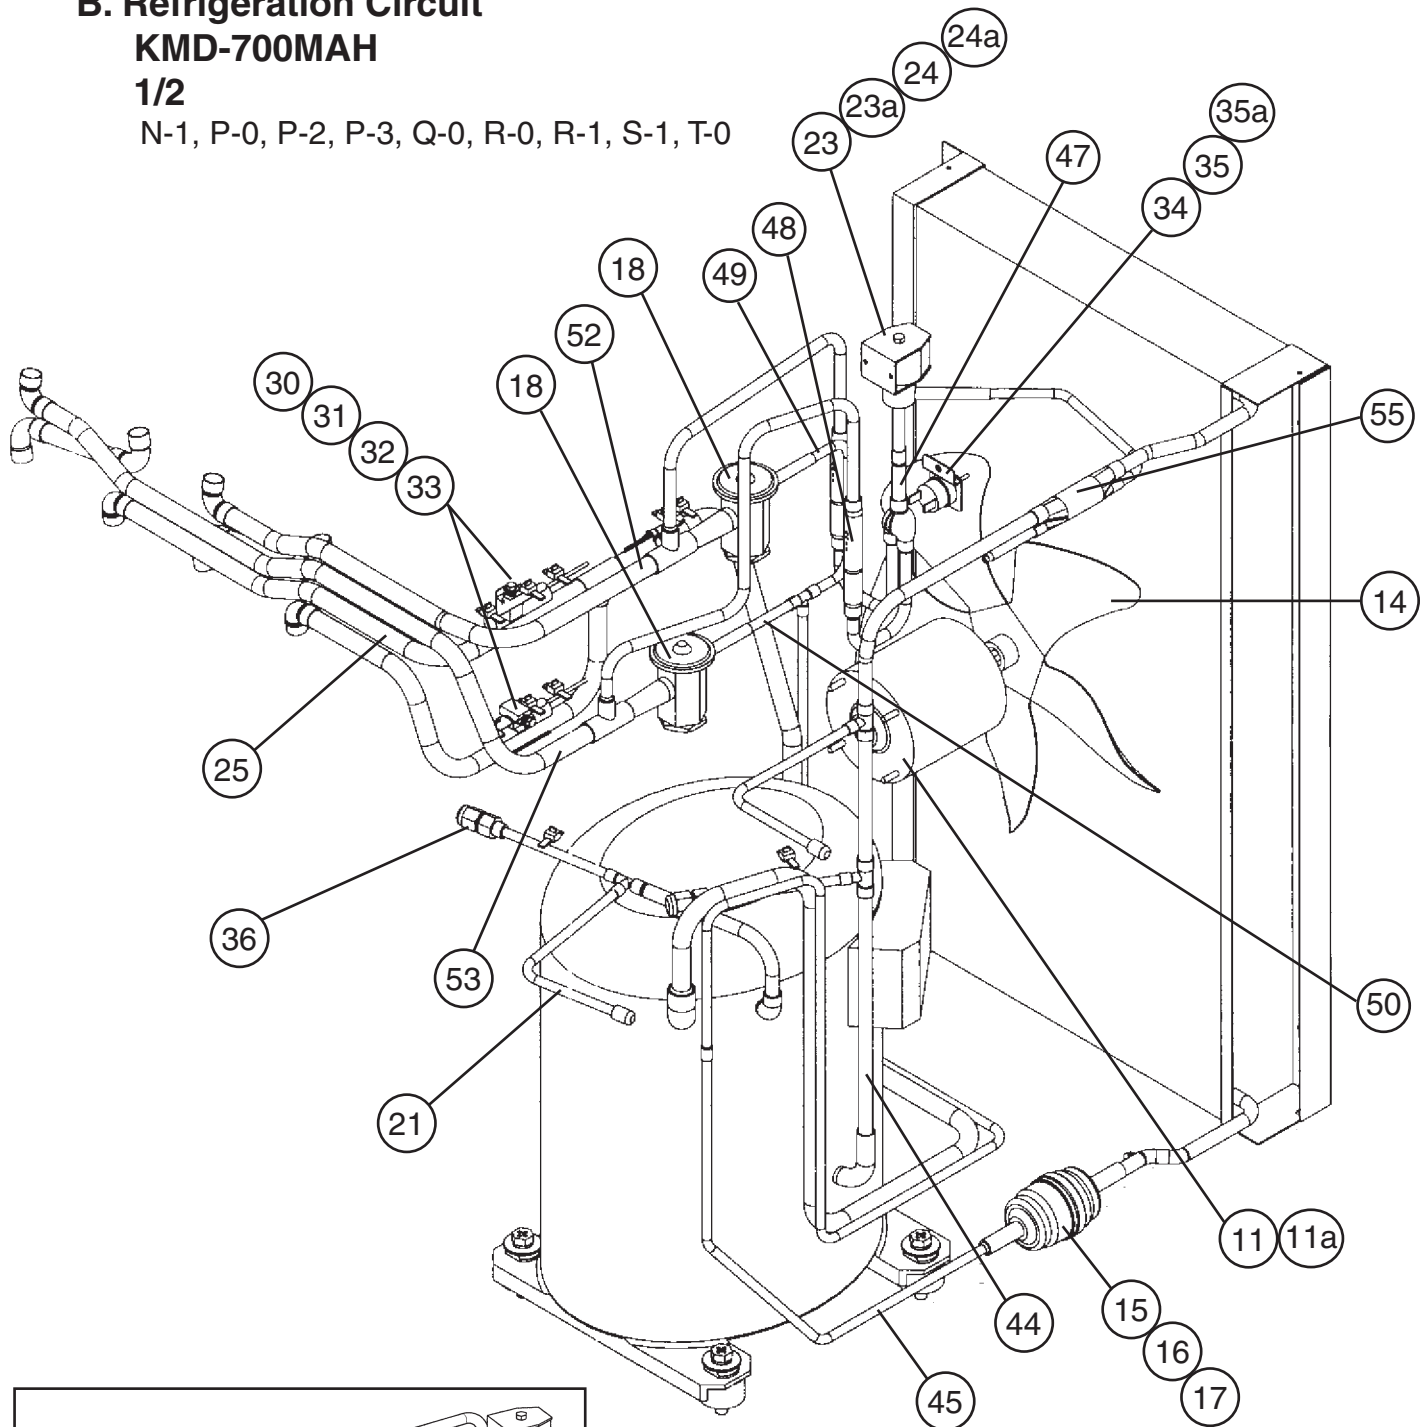


B. Refrigeration Circuit

KMD-700MAH

2/2

N-1, P-0, P-2, P-3, Q-0, R-0, R-1, S-1, T-0

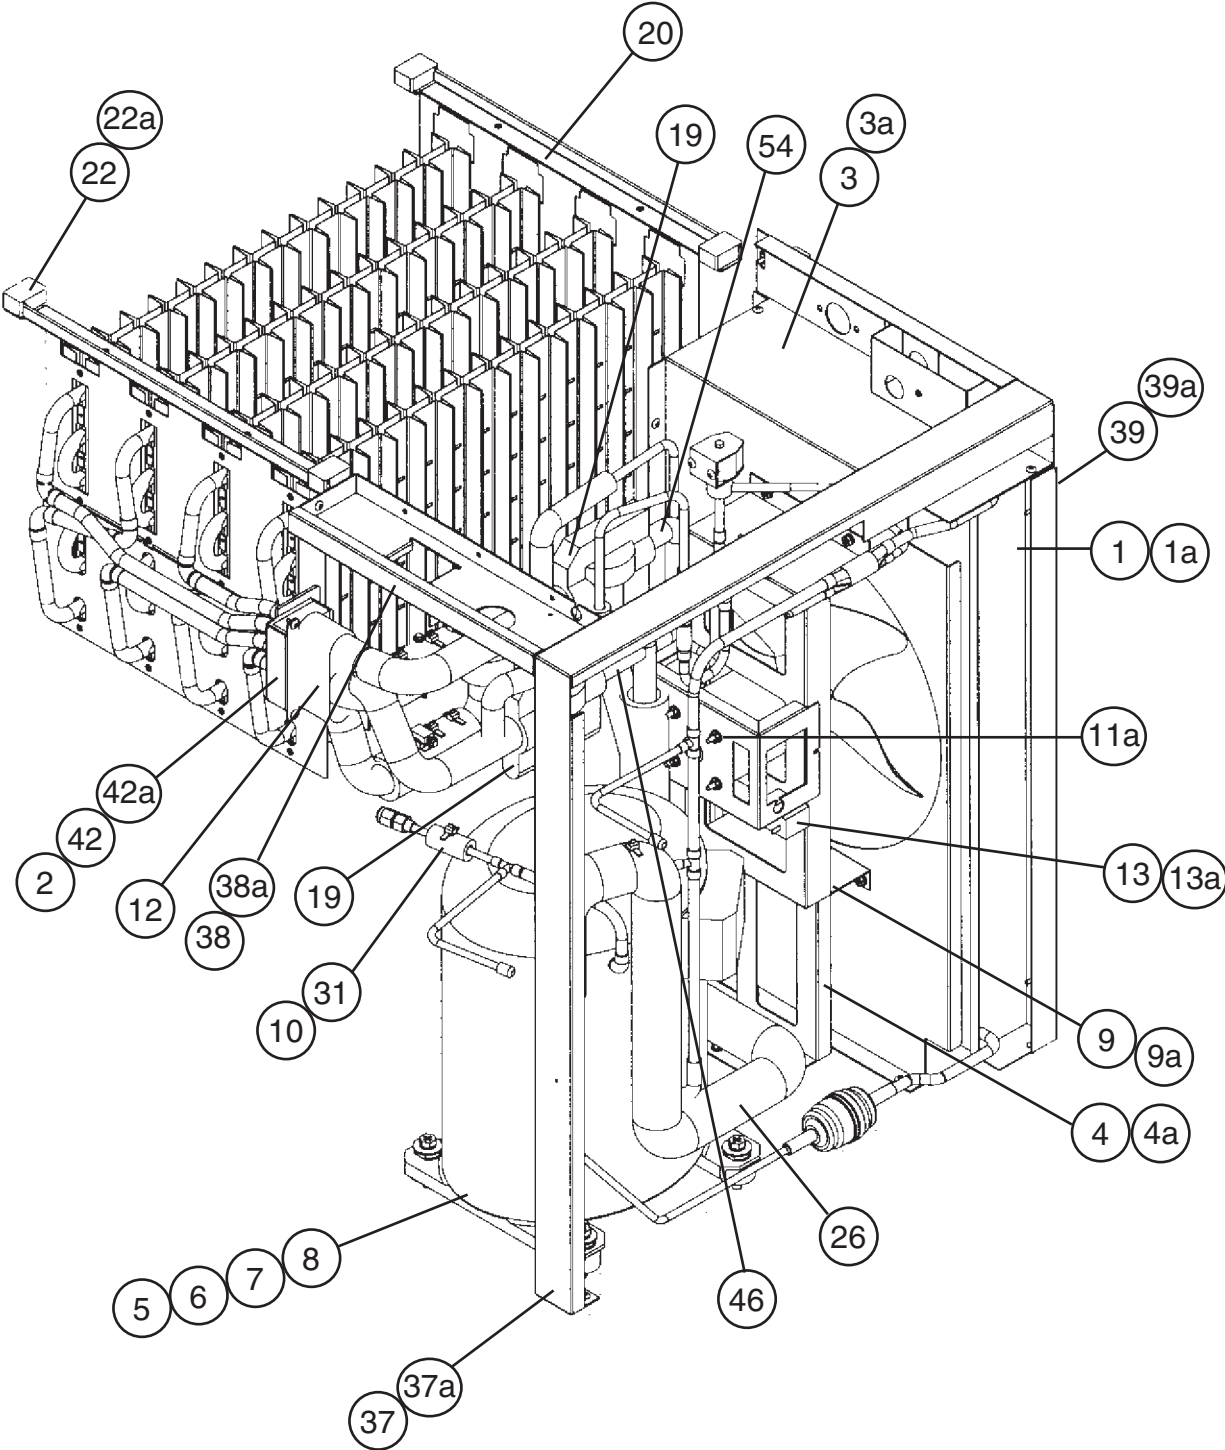


Title: **B. Refrigeration Circuit** Model: **KMD-700MAH**



Index No.	Description	Material or Model Number	Part Number	Required Number									
				N-0	N-1 P-0	P-2	P-3 Q-0	R-0 R-1	S-1 T-0				
1	Condenser	-	1A0802-01	1	1	1	1	1	1				
1a	T2 Screw	4x8	7P31-0408	3	3	3	3	3	3				
2	Insulated Rubber Tube	-	323975G01	-	1	1	1	1	1				
3	Shroud	-	3A2689G01	1	1	1	1	1	1				
3a	T2 Screw	4x8	7P31-0408	5	5	5	5	5	5				
4	Fan Motor Bracket (B)	GS	3A2789-01	1	1	1	1	1	1				
4a	Hex Head Bolt w/ Washer (LF)	5x10	7B0130510	4	4	4	4	4	4				
5	Compressor	CS10K6E-PFV-237	4A1539-01	1	1	1	1	1	1				
6	Bolt	8x45	437889-01	4	4	4	4	4	4				
7	Grommet	027-0167-00	434922-01	4	4	4	4	4	4				
8	Spacer	028-0188-02	434921-01	4	4	4	4	4	4				
9	Fan Motor Bracket	GS	3A2690G01	1	1	1	1	1	1				
9a	Hex Head Bolt w/ Washer (LF)	5x10	7B0130510	4	4	4	4	4	4				
10	Insulation Tube	L=40	7762-1020	1	1	1	1	1	1				
11	Fan Motor	U90 B1 7190 1031	440911-01	1	1	1	-						
		5KCP84DFK148S	4A3158-01				1	1	1				
11a	Self Locking Nut	No. 8-32	7N21I0832	4	4	4	4	4	4				
12	Insulation	-	436671-01	1	1	1	1	1	1				
13	Capacitor	5 MFD 250 VAC	443192-02	1	1	1	1	1	1				
13a	T2 Screw	4x8	7P31-0408	1	1	1	1	1	1				
14	Fan Blade	20569-17	4A0197-01	1	1	1	1	1	1				
15	Drier	-	4A2666-01	1	1	1	1	1	1				
16	End Cap	-	4A1413F01	2	2	2	2	2	2				
17	Nylon Tie	PLWP3H-TL	8911-0301	1	1	1	1	1	1				
18	Expansion Valve	-	4A2053-01	1	-								
			4A1870-01		2	2	2	2	2				
19	Expansion Valve Cover	-	4A1168-01	1	2	2	2	2	2				
20	Evaporator	-	2A2834G01	1	-								
			2A2781G01		1	1	1	1	1				
21	Copper Tube – Access Valve	-	3A2698G01	1	1	1	1	1	1				
22	Frame Seal	EPDM	323925-01	4	4	4	4	4	4				
22a	Truss Head Screw	4x8, SS	7C32-0408	4	4	4	4	4	4				
23	Valve Body	70	440352-01	1	1	1	1	-					
			4A3978-01					1	1				
23a	Bolt	-	440353F01	1	1	1	1	-					
			4A3277F01					1	1				
24	Coil - Valve	ABS-25-1- HD-2	440353-01	1	1	1	1	-					
		-	4A3277-01					1	1				
24a	Truss Head Screw	4x8	7C31-0408	2	2	2	2	2	2				
25	Copper Tube (A) Low Side	CU	3A2697G01	1	-								
			3A3010G01		1	1	1	1	1				
26	Heat Exchanger	-	3A2696G01	1	-								
			3A3009G01		1	1	1	1	1				

Title: B. Refrigeration Circuit Model: KMD-700MAH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0	N-1 P-0	P-2	P-3 Q-0	R-0 R-1	S-1 T-0			
27	Thermistor	-	429006-04	1	-							
			429006-05		1	-						
			429006-03			1	1	1	1			
28	Holder – Thermistor	CU	438247-01	1	1	1	1	1	1			
29	Insulation – Thermistor	PE FOAM	427441-01	1	1	1	1	1	1			
30	Insulation – Tube	L=200	7762-2943	1	-							
		L=110			2	2	2	2	2			
31	Cable Tie	-	7920-0010	4	10	10	10	10	10			
32	Holder – Expansion Valve	-	3A0112-01	1	2	2	2	2	2			
33	Clamp	-	443461-02	1	2	2	2	2	2			
34	Pressure Switch	ACB-1UB09	433441-07	1	1	1	1	1	1			
35	Pressure Switch Bracket	GS	434938-01	1	1	1	1	1	1			
35a	T2 Screw	4x8	7P31-0408	1	1	1	1	1	1			
36	Access Valve	-	457729-01	2	2	2	2	2	2			
37	Side Frame	GS	3A2691G01	1	1	1	1	1	1			
37a	Truss Head Screw	4x8	7C31-0408	6	6	6	6	6	6			
38	Front Frame	GS	3A2692-01	1	1	1	1	1	1			
38a	T2 Screw	4x8	7P31-0408	4	4	4	4	4	4			
39	Barrier	GS	3A2693-01	1	1	1	1	1	1			
39a	T2 Screw	4x8	7P31-0408	2	2	2	2	2	2			
40	Rubber Insulation (A)	-	3A2649-01	1	-							
41	Rubber Insulation (B)	-	3A2650-01	1	-							
42	Insulation Holder	SS	4A3043-01	1	1	1	1	1	-			
			3A0979-01						1			
42a	T2 Screw	4x8, SS	7P32-0408	2	2	2	2	2	2			
43	Connection Tee Cover	-	4A1379-01		3	3	3	3	3			
44	Copper Tube (A) High Side (includes Stainer, item 55)	CU	3A2694G01	1	1	1	1	1	1			
45	Copper Tube (B) High Side	CU	3A2695-01	1	1	1	1	1	1			
46	Insulation Tube	L=88	7762-1020		1	1	1	1	1			
47	Check Valve Assembly	-	3A3013G01		1	1	1	1	1			
48	Check Valve	SKC31220	4A2054-01		2	2	2	2	2			
49	Copper Tube (B) Heat Exchanger	-	4A3292-01		1	1	1	1	1			
50	Copper Tube (A) Heat Exchanger	-	4A3293-01		1	1	1	1	1			
51	Tee	-	436000-01		1	1	1	1	1			
52	Copper Tube (B) - Low Side	-	3A3011G01		1	1	1	1	1			
53	Copper Tube (C) - Low Side	-	3A3012G01		1	1	1	1	1			
54	Insulation Tube	L=220	7762-1020		1	1	1	1	1			
55	Strainer (included in item 44, Copper Tube (A) High Side)	-	4A0397-01	1	1	1	1	1	1			

B. Refrigeration Circuit
KMD-700MWH
 1/2
 N-0

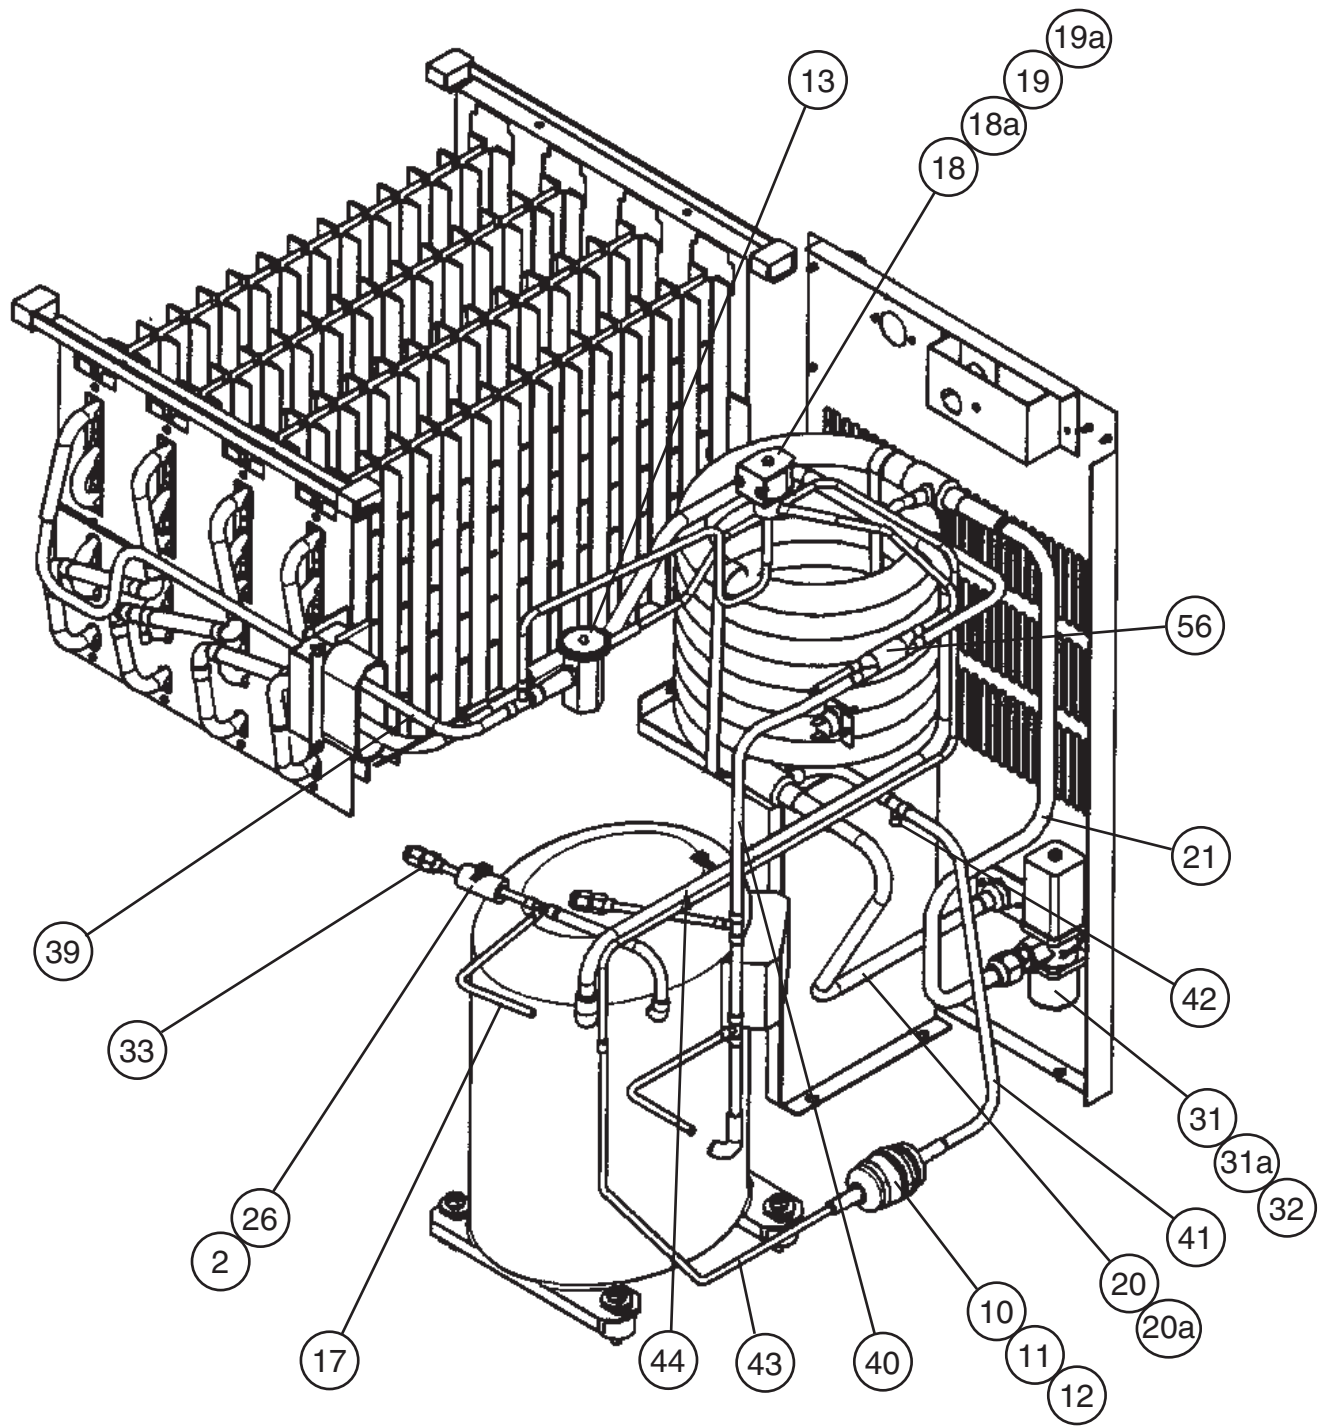

B. Refrigeration Circuit
KMD-700MWH
2/2
N-0

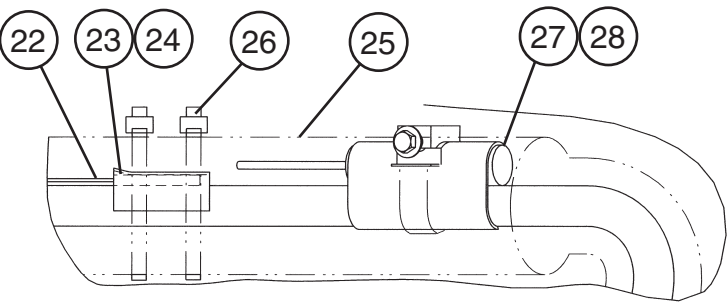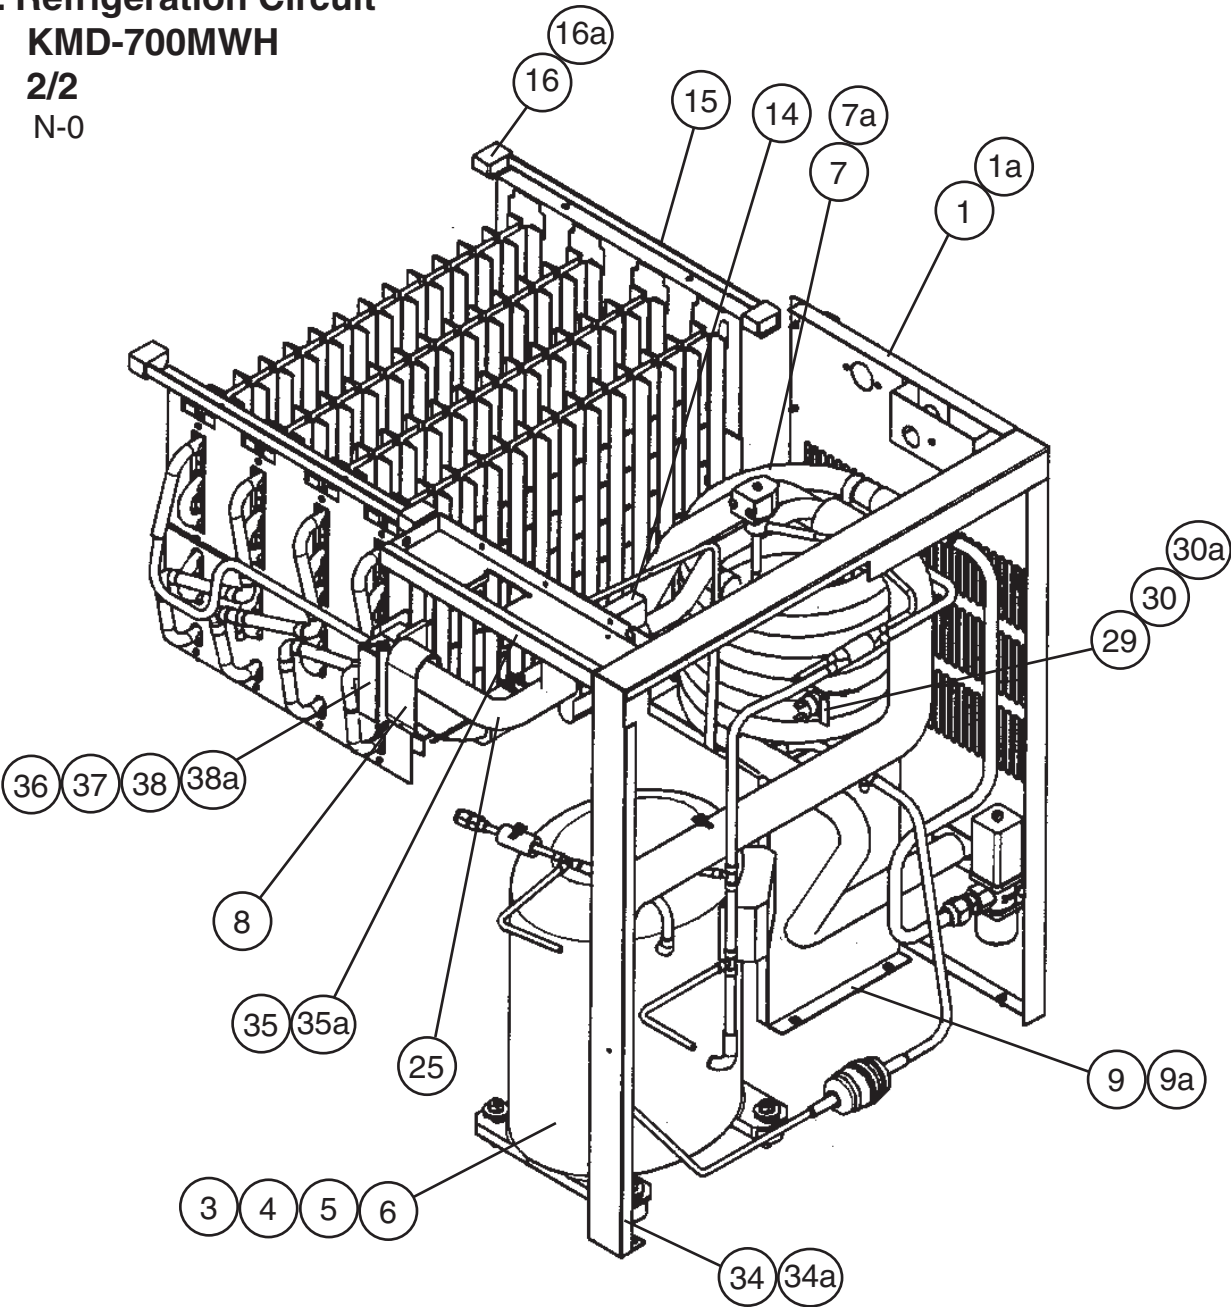



Detailed Thermistor Attachment

B. Refrigeration Circuit

KMD-700MWH

1/2

N-1, P-2, Q-0, R-0, R-1, S-1, T-0

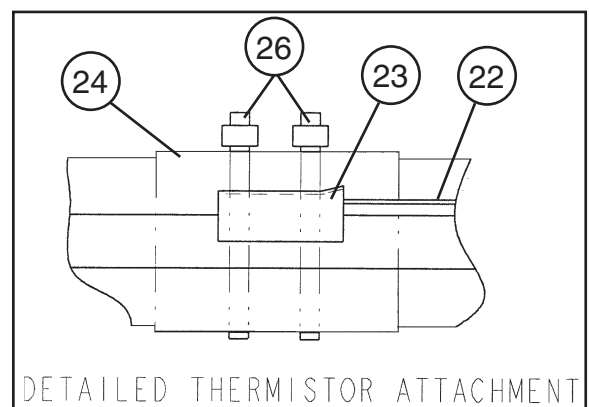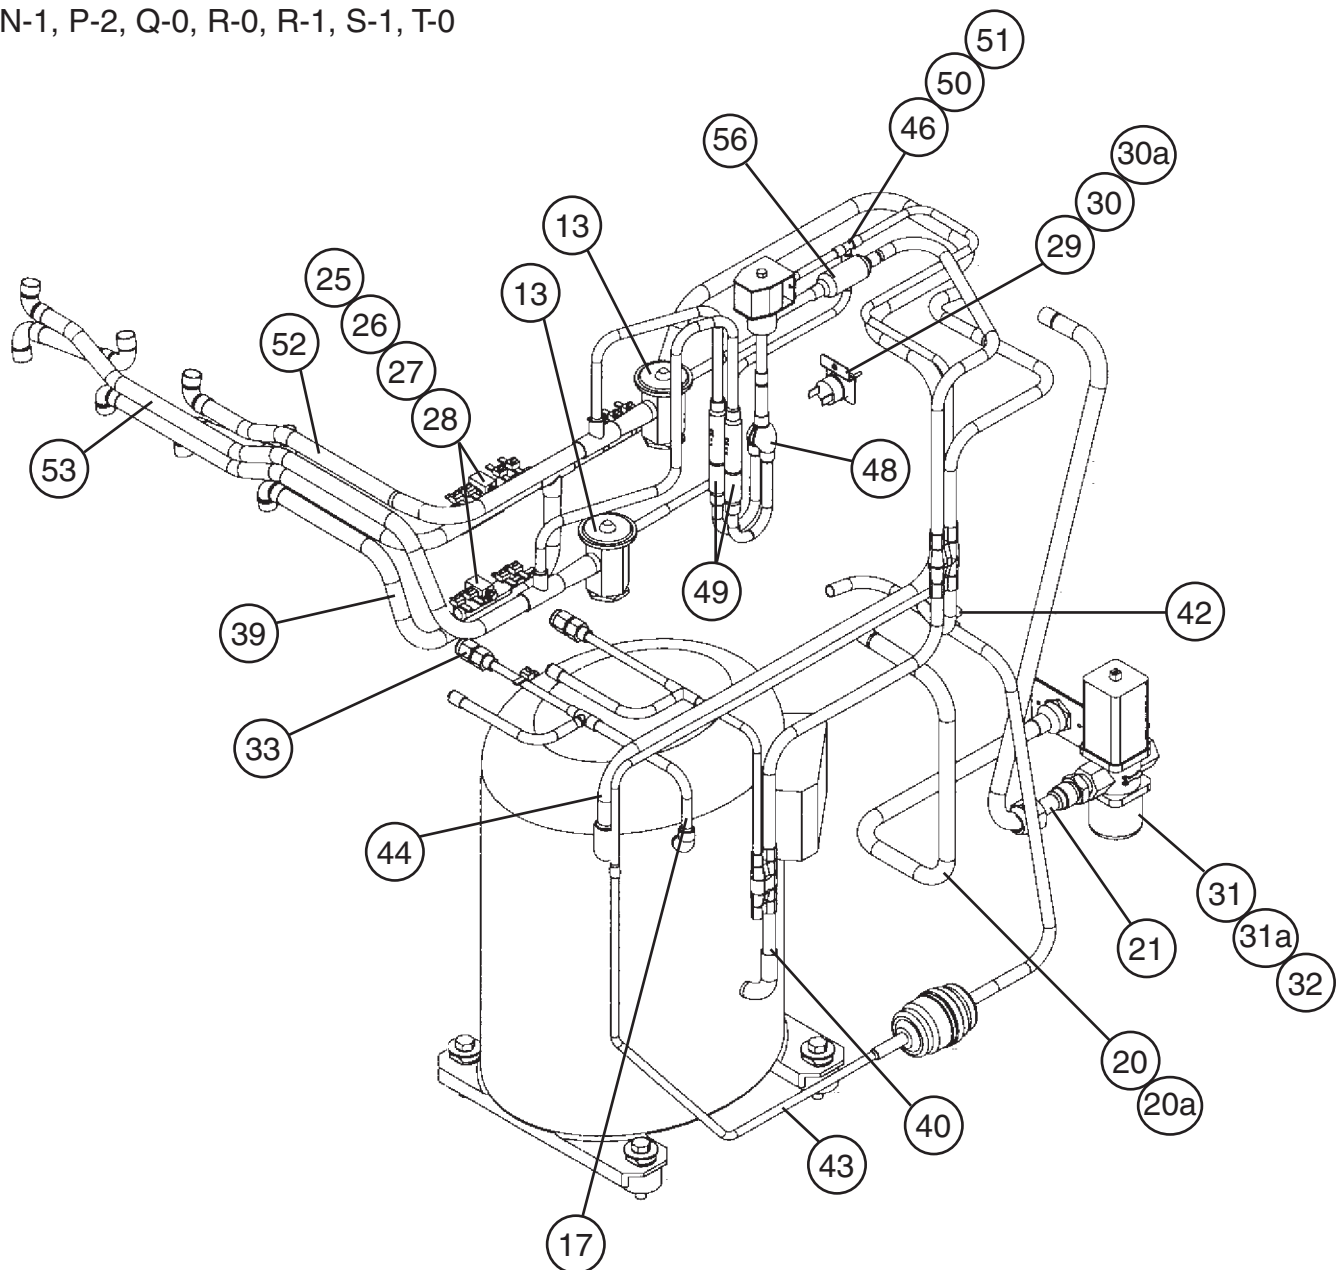


B. Refrigeration Circuit

KMD-700MWH

2/2

N-1, P-2, Q-0, R-0, R-1, S-1, T-0

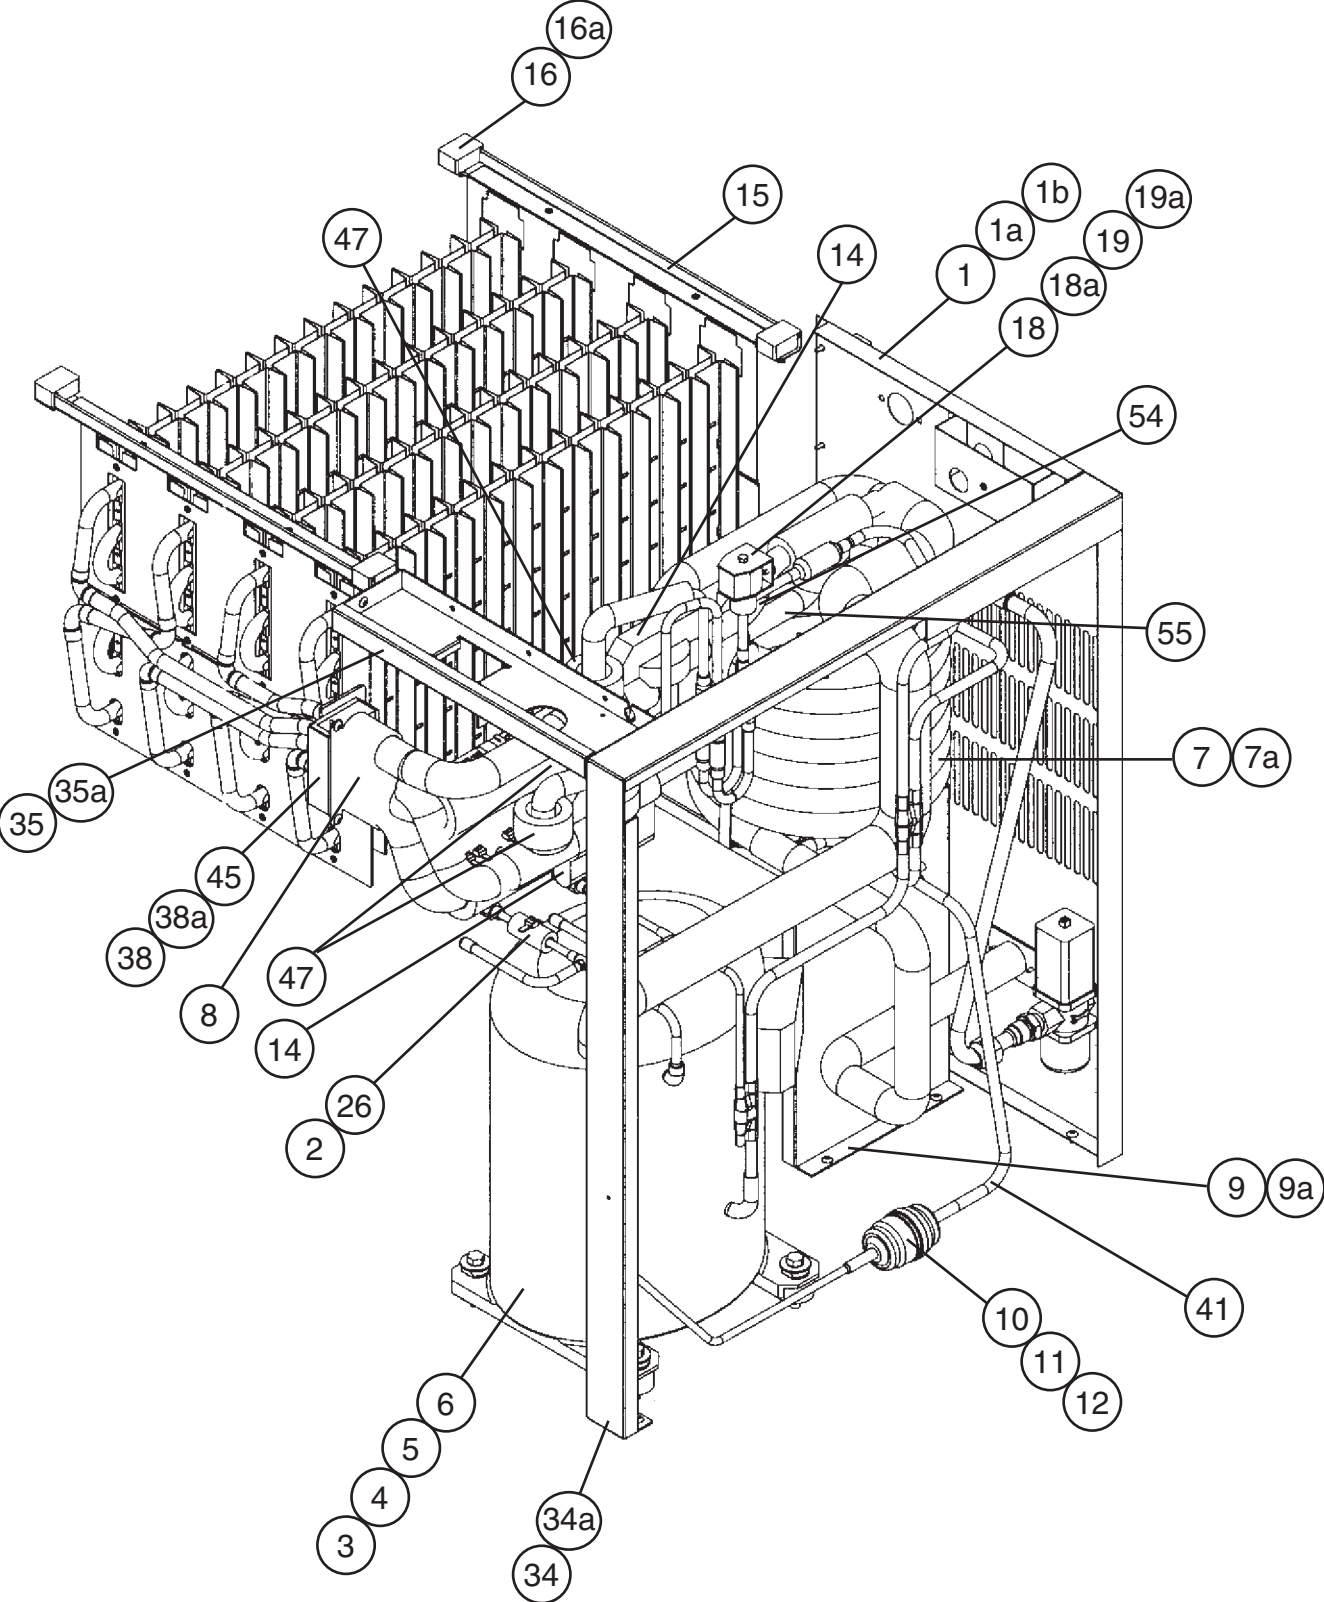

Title: B. Refrigeration Circuit Model: KMD-700MWH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0	N-1	P-2 Q-0	R-0 R-1	S-1 T-0				
1	Rear Panel	GS	3A2758G01	1	1	1	1	1				
1a	T2 Screw	4x8	7P31-0408	5	5	5	5	5				
1b	Truss Head Screw	4x8	7C31-0408		2	2	2	2				
2	Insulation Tube	L=40	7762-1020	1	1	1	1	1				
3	Compressor	CS10K6E-PFV-237	4A1539-01	1	1	1	1	1				
4	Bolt	8x45	437889-01	4	4	4	4	4				
5	Grommet	027-0167-00	434922-01	4	4	4	4	4				
6	Spacer	028-0188-02	434921-01	4	4	4	4	4				
7	Condenser – Water Cooled	HS-0162	2A2359G03	1	1	1	1	1				
7a	Hex Head Bolt w/Washer (LF)	5x10	7B0130510	2	-							
		5x12	7B0130512		2	2	2	2				
8	Insulation	-	436671-01	1	1	1	1	1				
9	Condenser – Bracket	GS	2A2846-01	1	1	1	1	1				
9a	Truss Head Screw	4x8	7C31-0408	4	-							
	T2 Screw		7P31-0408		4	4	4	4				
10	Drier	-	4A2666-01	1	1	1	1	1				
11	End Cap	-	4A2666F01	2	2	2	2	2				
12	Nylon Tie	PLWP3H-TL	8911-0301	1	1	1	1	1				
13	Expansion Valve	-	4A2053-01	1	-							
			4A1870-01		2	2	2	2				
14	Expansion Valve Cover	-	4A1168-01	1	2	2	2	2				
15	Evaporator	-	2A2834G01	1	-							
			2A2781G01		1	1	1	1				
16	Frame Seal	EPDM	323925-01	4	4	4	4	4				
16a	Truss Head Screw	4x12, SS	7C32-0412	4	4	4	4	4				
17	Copper Tube – Access Valve	-	3A2698G01	1	-							
			3A2734G01		1	1	1	1				
18	Valve Body	70	440352-01	1	1	1	-					
			4A3978-01				1	1				
18a	Bolt	-	440353F01	1	1	1	-					
			4A3277F01				1	1				
19	Coil – Valve	ABS-25-1-HD-2	440353-01	1	1	1	-					
		-	4A3277-01				1	1				
19a	Truss Head Screw	4x8	7C31-0408	2	2	2	2	2				
20	Copper Tube – Condenser Inlet	-	3A2769G01	1	-							
			3A2827G01		1	1	1	1				
20a	T2 Screw	4x8	7P31-0408	2	2	2	2	2				
21	Copper Tube – Condenser Outlet	-	4A3110G01	1	-							
			3A3045G01		1	1	1	1				
22	Thermistor	-	429006-05	1	1	-						
			429006-03			1	1	1				
23	Holder – Thermistor	CU	438247-01	1	1	1	1	1				
24	Insulation – Thermistor	PE FOAM	427441-01	1	1	1	1	1				

Title: **B. Refrigeration Circuit** Model: **KMD-700MWH**


Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0	N-1	P-2 Q-0	R-0 R-1	S-1 T-0			
25	Insulation – Tube	L=180	7762-2943	1	-						
			7762-3555		2	-					
		L=110	7762-3555			2	2	2			
26	Cable Tie	-	7920-0010	4	12	12	12	12			
27	Holder – Expansion Valve	-	3A0112-01	1	2	2	2	2			
28	Clamp	-	443461-02	1	2	2	2	2			
29	Pressure Switch	ACB-2UB04	433441-05	1	1	1	1	1			
30	Pressure Switch Bracket	GS	434938-01	1	1	1	1	1			
30a	T2 Screw	4x8	7P31-0408	1	1	1	1	1			
31	Water Regulator	-	4A0911-06	1	1	1	1	1			
31a	Truss Head Screw	4x6	7C31-0406	2	2	2	2	2			
32	Male Connector	-	4A1087-01	1	1	1	1	1			
33	Access Valve	-	457729-01	1	-						
34	Side Frame	GS	3A2691G01	1	1	1	1	1			
34a	Truss Head Screw	4x8	7C31-0408	2	2	2	2	2			
35	Front Frame	GS	3A2692-01	1	1	1	1	1			
35a	T2 Screw	4x8	7P31-0408	4	4	4	4	4			
36	Rubber Insulation (A)	-	3A2649-01	1	-						
37	Rubber Insulation (B)	-	3A2650-01	1	-						
38	Insulation Holder	SS	4A3043-01	1	1	1	1	-			
			3A0979-01					1			
38a	T2 Screw	4x8, SS	7P32-0408	2	2	2	2	2			
39	Copper Tube (A) Low Side	CU	3A2697G01	1	-						
			3A2804G01		1	1	1	1			
40	Copper Tube (A) High Side (includes Strainer, item 56)	CU	3A2760G01	1	-						
			3A3054G01		1	1	1	1			
41	Copper Tube (B) High Side	CU	3A2768-01	1	1	1	1	1			
42	Tee	-	436000-06	1	1	1	1	1			
43	Copper Tube (C) – High Side	CU	3A2762-01	1	-						
			3A3047-01		1	1	1	1			
44	Heat Exchanger	-	3A2766G01	1	-						
			2A3037G01		1	1	1	1			
45	Insulated Rubber Tube	-	323975G01		1	1	1	1			
46	Copper Tube (F) High Side	-	4A3342-01		1	1	1	1			
47	Connection Tee Cover	-	4A1379-01		3	3	3	3			
48	Check Valve Assembly	-	3A3071G01		1	1	1	1			
49	Check Valve	-	4A2054-01		2	2	2	2			
50	Copper Tube (D) High Side	-	4A3333-01		1	1	1	1			
51	Tee	-	436000-01		1	1	1	1			
52	Copper Tube (B) - Low Side	-	3A3050G01		1	1	1	1			
53	Copper Tube (C) - Low Side	-	3A3051G01		1	1	1	1			
54	Insulation Tube	L=505	7762-1020		1	-					
		L=270				1	1	1			
55	Insulation Tube	L=330	7762-1020		1	-					
		L=370				1	1	1			
56	Strainer (included in item 40, Copper Tube (A) High Side)	-	4A0397-01	1	1	1	1	1			

B. Refrigeration Circuit


KMD-700MRH

1/2

N-0

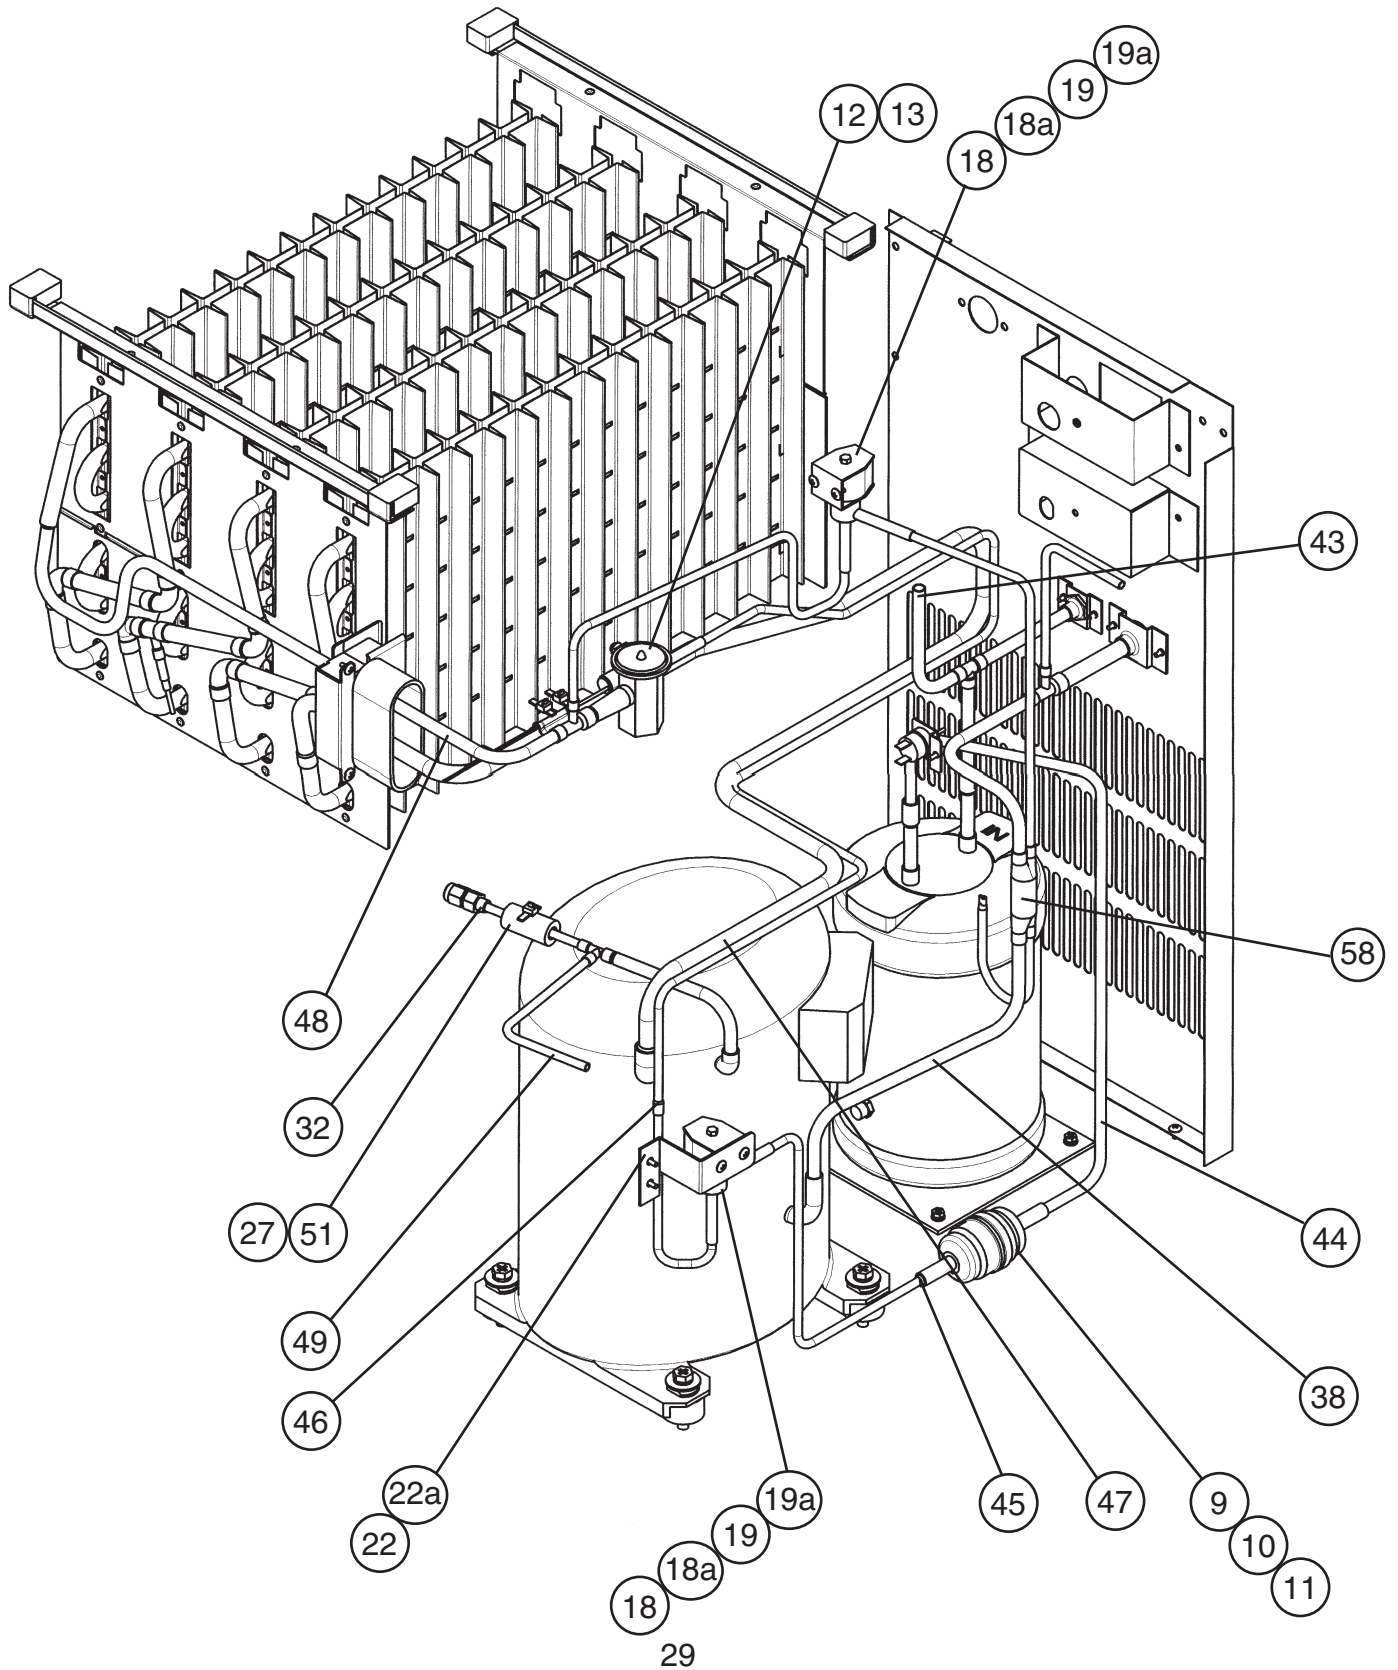

B. Refrigeration Circuit
KMD-700MRH
2/2
N-0



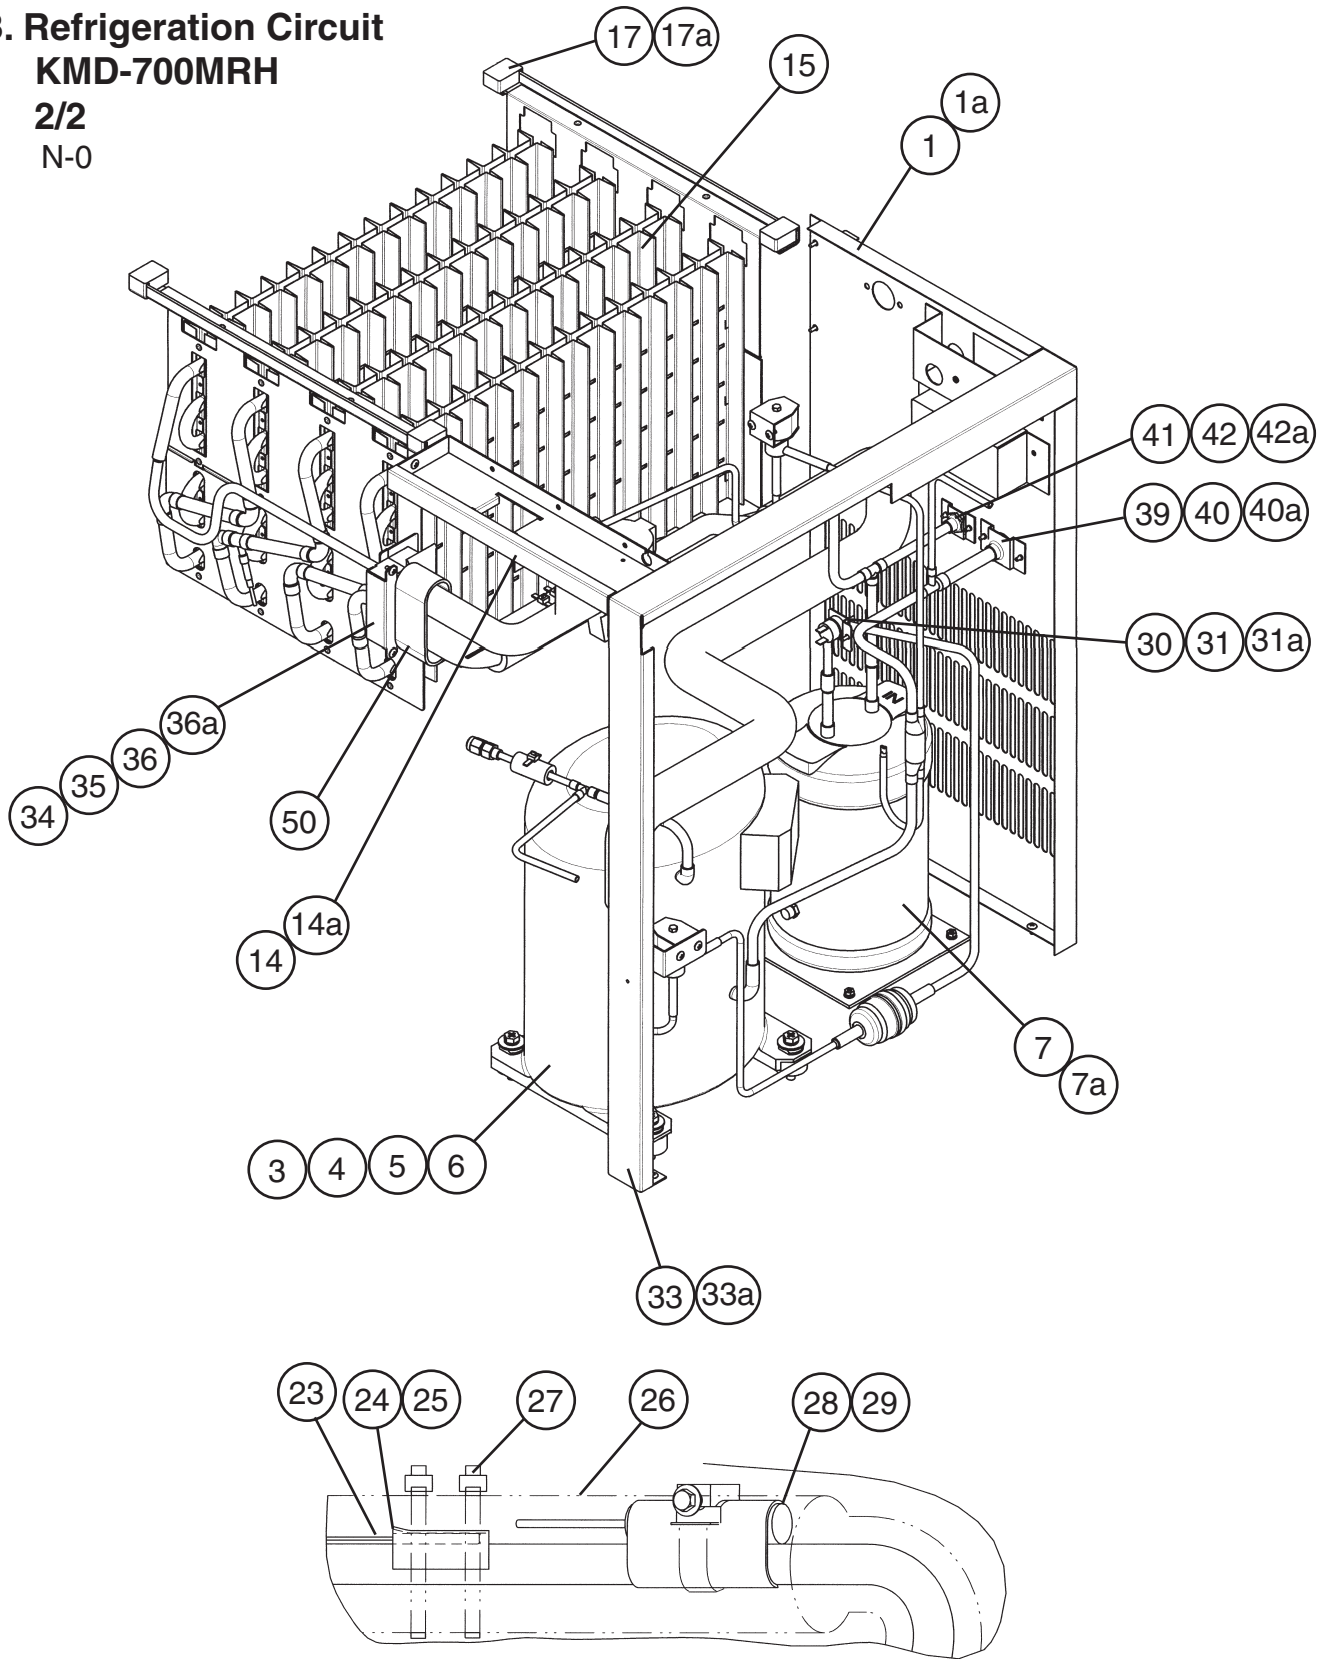


Detailed Thermistor Attachment

B. Refrigeration Circuit **KMD-700MRH**

1/2

N-1, P-1, P-2, Q-0, R-0, R-1, S-1, T-0

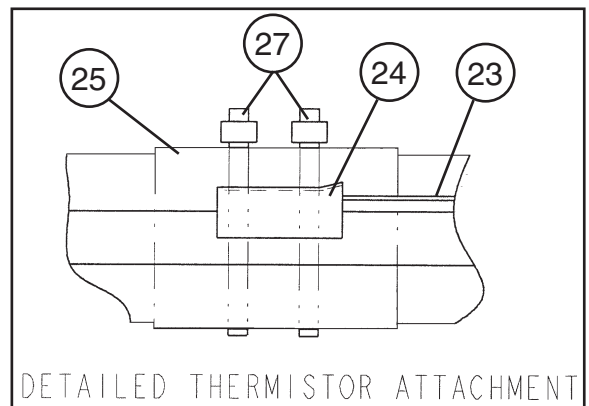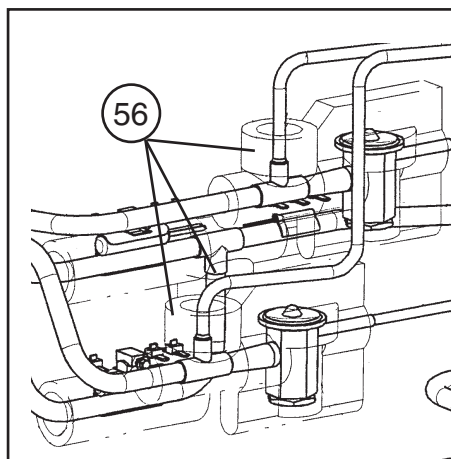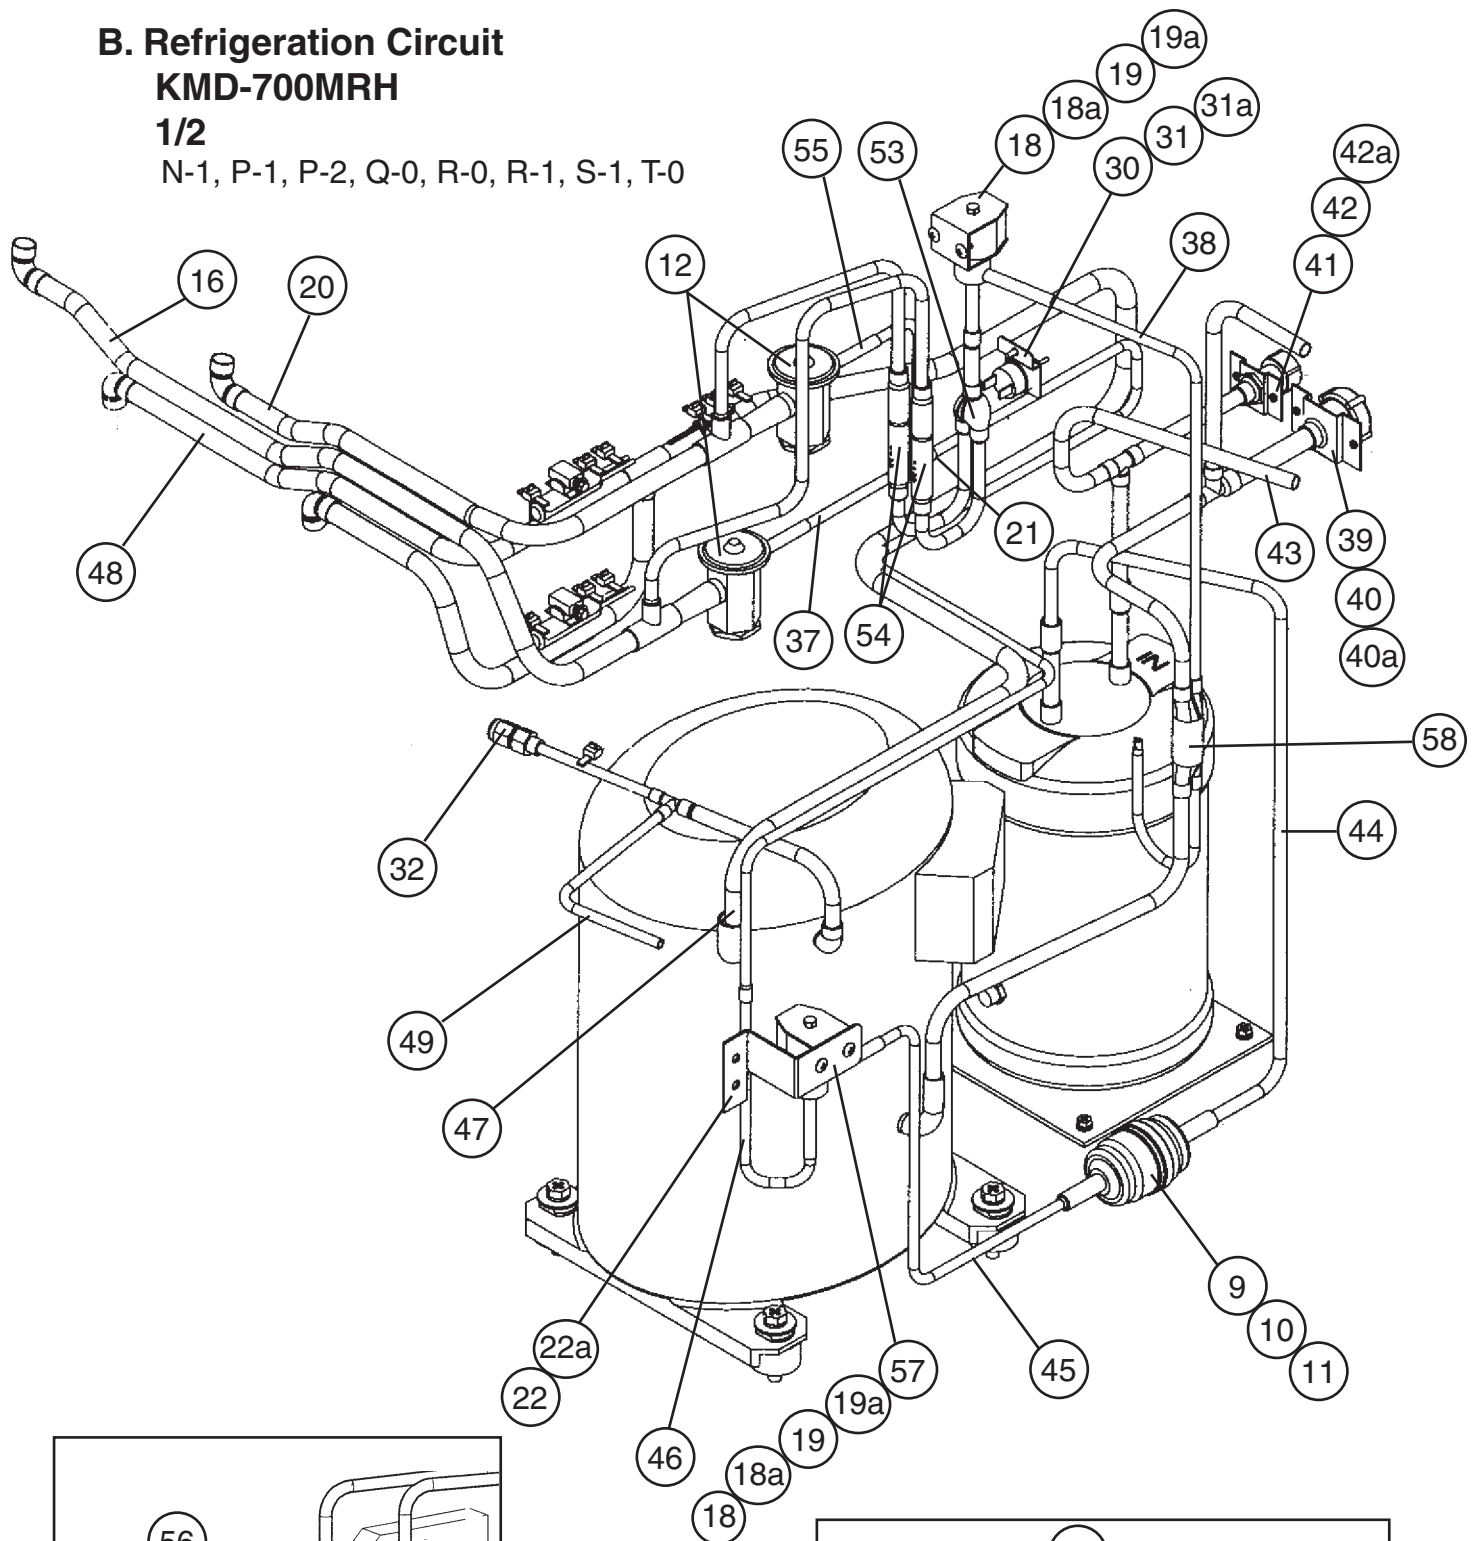


B. Refrigeration Circuit

KMD-700MRH

2/2

N-1, P-1, P-2, Q-0, R-0, R-1, S-1, T-0

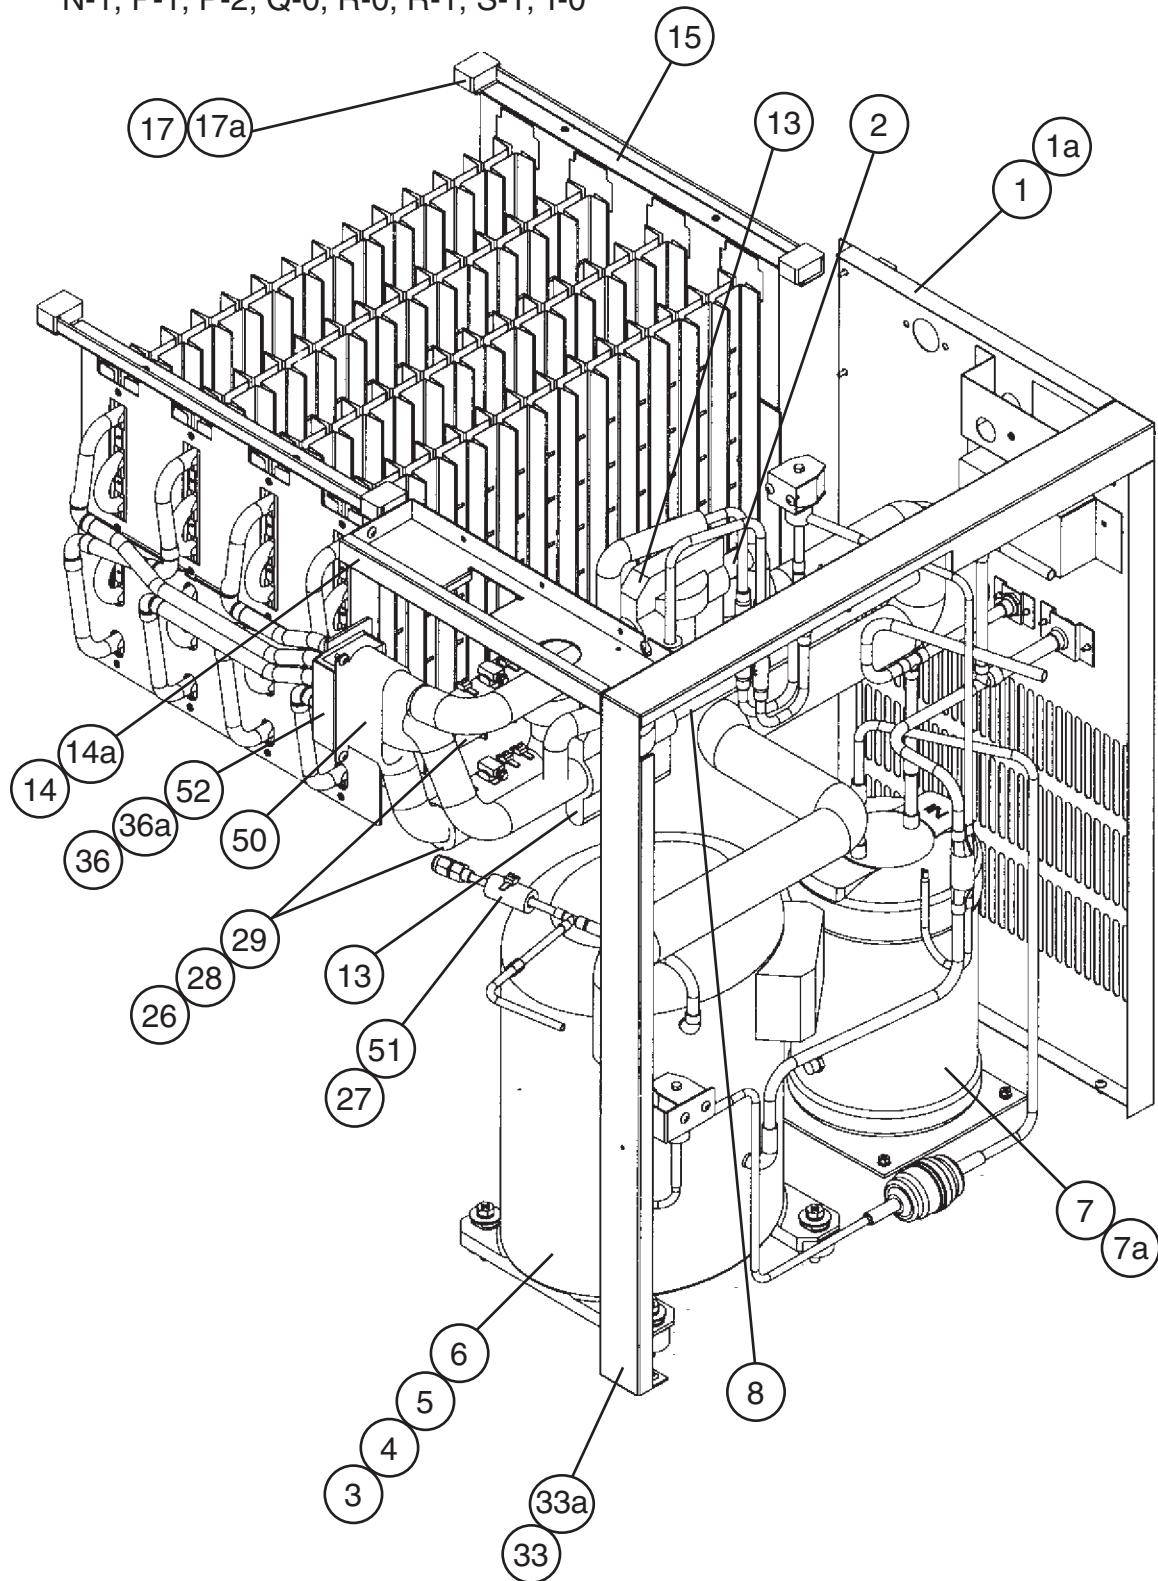


Title: B. Refrigeration Circuit Model: KMD-700MRH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0	N-1 P-1	P-2 Q-0	R-0 R-1	S-1 T-0				
1	Rear Panel	GS	3A2757G01	1	1	1	1	1				
1a	T2 Screw	4x8	7P31-0408	5	5	5	5	5				
2	Insulation Tube	L=184	7762-1020		1	1	1	1				
3	Compressor	CS10K6E-PFV-279	4A1539-02	1	1	1	1	1				
4	Bolt	8x45	437889-01	4	4	4	4	4				
5	Grommet	027-0167-00	434922-01	4	4	4	4	4				
6	Spacer	028-0188-02	434921-01	4	4	4	4	4				
7	Receiver Tank	-	437652-01	1	1	1	1	1				
7a	Hex Head Bolt w/Washer (LF)	5x10	7B0130510	3	3	3	3	3				
8	Insulation Tube	L=133	7762-1020		1	1	1	1				
9	Drier	-	4A2666-01	1	1	1	1	1				
10	End Cap	-	4A1413F01	2	-							
			4A2666F01		2	2	2	2				
11	Nylon Tie	PLWP3H-TL	8911-0301	1	1	1	1	1				
12	Expansion Valve	-	4A2053-01	1	-							
			4A1870-01		2	2	2	2				
13	Expansion Valve Cover	-	4A1168-01	1	2	2	2	2				
14	Front Frame	GS	3A2692-01	1	1	1	1	1				
14a	T2 Screw	4x8	7P31-0408	4	4	4	4	4				
15	Evaporator	-	2A2834G01	1	-							
			2A2781G01		1	1	1	1				
16	Copper Tube (C) - Low Side	-	3A3012G01		1	1	1	1				
17	Frame Seal	EPDM	323925-01	4	4	4	4	4				
17a	Truss Head Screw	4x8, SS	7C32-0408	4	4	4	4	4				
18	Valve Body - Hot Gas	70	440352-01	2	2	2	-					
			4A3978-01				1	1				
18a	Bolt	-	440353F01	2	2	2	-					
			4A3277F01				2	2				
19	Coil-Valve	ABS-25-1-HD-2	440353-01	2	2	2	-					
		-	4A3277-01				2	2				
19a	Truss Head Screw	4x8	7C31-0408	2	2	2	2	2				
20	Copper Tube (B) - Low Side	-	3A3043G01		1	1	1	1				
21	Tee	-	436000-01		1	1	1	1				
22	Line Valve Bracket	GS	4A3037-01	1	1	1	1	1				
22a	T2 Screw	4x8	7P31-0408	2	2	2	2	2				
23	Thermistor	-	429006-05	1	1	-						
			429006-03			1	1	1				
24	Holder – Thermistor	CU	438247-01	1	1	1	1	1				
25	Insulation – Thermistor	PE FOAM	427441-01	1	1	1	1	1				
26	Insulation Tube	L=220	7762-2943	1	-							
		L=110			2	2	2	2				
27	Cable Tie	-	7920-0010	3	10	10	10	10				
28	Holder – Expansion Valve	-	3A0112-01	1	2	2	2	2				

Title: B. Refrigeration Circuit Model: KMD-700MRH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0	N-1 P-1	P-2 Q-0	R-0 R-1	S-1 T-0				
29	Clamp	-	443461-02	1	2	2	2	2				
30	Pressure Switch	ACB-1UB09	433441-07	1	1	1	1	1				
31	Pressure Switch Bracket	GS	434938-01	1	1	1	1	1				
31a	T2 Screw	4x8	7P31-0408	1	1	1	1	1				
32	Access Valve	-	457729-01	1	1	1	1	1				
33	Side Frame	GS	3A2691G01	1	1	1	1	1				
33a	Truss Head Screw	4x8	7C31-0408	4	4	4	4	4				
34	Rubber Insulation (A)	-	3A2649-01	1	-							
35	Rubber Insulation (B)	-	3A2650-01	1	-							
36	Insulation Holder	SS	4A3043-01	1	1	1	1	-				
			3A0979-01					1				
36a	T2 Screw	4x8, SS	7P32-0408	2	2	2	2	2				
37	Copper Tube (A) - Liquid	-	4A3321-01		1	1	1	1				
38	Copper Tube (A) High Side (includes Strainer, item 58)	CU	3A2759G01	1	1	1	1	1				
39	Coupling	-	434136G01	1	1	1	1	1				
40	Tube Holder – L	GS	438245-01	1	1	1	1	1				
40a	T2 Screw	4x8	7P31-0408	2	2	2	2	2				
41	Coupling	-	433751G01	1	1	1	1	1				
42	Tube Holder – S	GS	438246-01	1	1	1	1	1				
42a	T2 Screw	4x8	7P31-0408	2	2	2	2	2				
43	Copper Tube (B) – High Side	CU	4A3038G01	1	1	1	1	1				
44	Copper Tube (C) – High Side	CU	3A2761-01	1	1	1	1	1				
45	Copper Tube (D) – High Side	CU	3A2763-01	1	1	1	1	1				
46	Copper Tube (E) – High Side	CU	3A2764-01	1	1	1	1	1				
47	Heat Exchanger	-	3A2765G01	1	-							
			3A3041G01		1	1	1	1				
48	Copper Tube (A) – Low Side	CU	3A2697G01	1	-							
			3A3010G01		1	1	1	1				
49	Copper Tube – Access Valve	-	3A2698G01	1	1	1	1	1				
50	Insulation	-	436671-01	1	1	1	1	1				
51	Insulation Tube	L=40	7762-1020	1	1	1	1	1				
52	Insulated Rubber Tube	-	323975G01		1	1	1	1				
53	Check Valve Assembly	-	3A3042G01		1	1	1	1				
54	Check Valve	SKC31220	4A2054-01		2	2	2	2				
55	Copper Tube (B) - Liquid	-	4A3322-01		1	1	1	1				
56	Connection Tee Cover	-	4A1379-01		1	3	3	3				
57	Valve Body - Liquid Line	-	4A3276-01				1	1				
58	Strainer (included in item 38: Copper Tube (A) High Side)	-	4A0397-01	1	1	1	1	1				

C. Water Circuit

KMD-700MAH, MWH, MRH

N-0, N-1, P-0, P-1, P-2, P-3, Q-0, R-0, R-1, S-1, T-0


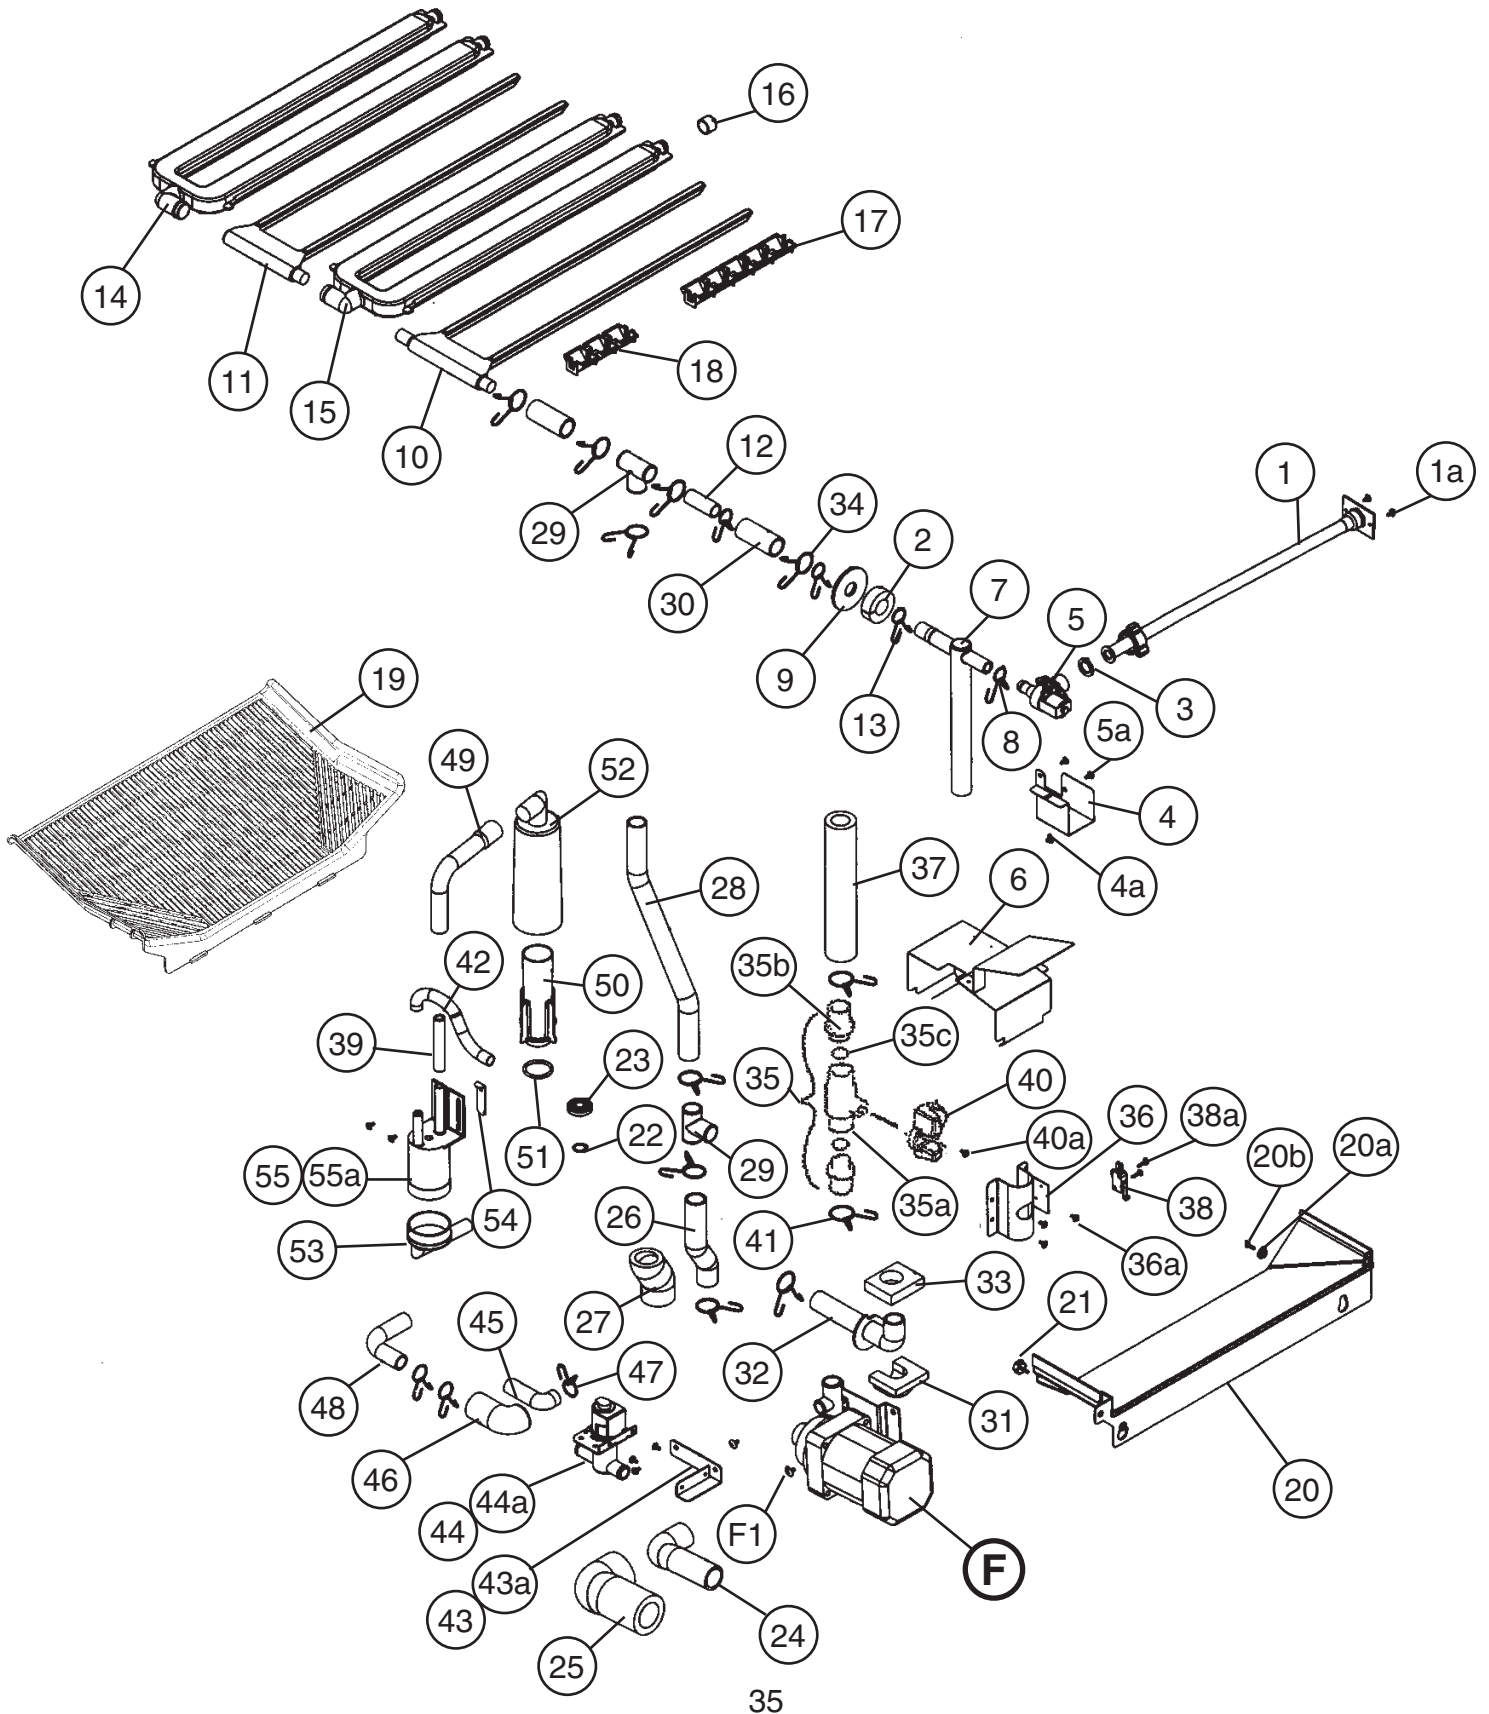


Title: C. Water Circuit Model: KMD-700MAH, MWH, MRH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0	N-1 to P-1	P-2 to Q-0	R-0 R-1	S-1 T-0				
F	Pump Motor Assembly	HS-0178	2A2848A01	1	1	1	1	1				
F1	Truss Head Screw	5x8, SS	7C32-0508	2	2	2	2	2				
1	Water Supply Pipe	-	4A0768G07	1	1	1	1	1				
1a	T2 Screw	4x8, SS	7P32-0408	2	2	2	2	2				
2	Insulation (E)	-	4A0392-01	1	1	1	1	1				
3	Rubber Gasket	-	413854-03	1	1	1	1	1				
4	Water Valve Bracket	GS	3A2685-01	1	1	1	1	1				
4a	T2 Screw	4x8	7P31-0408	1	1	1	1	1				
5	Water Valve	-	4A1176-01	1	-							
			4A1176-03		1	1	1	1				
5a	Truss Head Screw	4x8, SS	7C32-0408	2	2	2	2	2				
6	Water Shield	SS	3A2725G01	1	1	1	1	1				
7	Hose – Water Valve	-	3A2648-01	1	1	1	1	1				
8	Hose Clamp	16.5 mm, SS	427443-04	1	1	1	1	1				
9	Flange	-	439267-01	1	1	1	1	1				
10	Water Supply Tube	-	2A2370-01	1	1	1	1	1				
11	Water Supply Tube	-	2A2370-02	1	1	1	1	1				
12	Vinyl Hose	L=47	7716-1519	1	1	1	1	1				
13	Hose Clamp	18 mm, SS	427443-05	3	3	3	3	3				
14	Spray Tube	-	2A2369-01	1	1	1	1	1				
15	Spray Tube	-	2A2369-02	1	1	1	1	1				
16	Spray Tube Plug	-	3A2645-01	4	4	4	4	4				
17	Spray Guide (A)	-	208586-01	8	8	8	8	8				
18	Spray Guide (D)	-	208586-04	4	4	4	4	4				
19	Cube Guide (A)	-	1A0842-01	1	1	1	1	1				
20	Cube Guide (B)	-	1A0781-01	1	1	1	1	1				
20a	Collar	-	435269-01	2	2	2	2	2				
20b	T2 Flat Head Screw	4x12, SS	7P22-0412	2	2	2	2	2				
21	Thumbscrew	-	415949G10	1	1	1	1	1				
22	"O" Ring	-	7611-P015	1	1	1	1	1				
23	Drain	-	309246-01	1	1	1	1	1				
24	Suction Hose	-	4A3001-01	1	1	1	1	1				
25	Insulation Tube	L=170	7762-3555	1	1	1	1	1				
26	Discharge Hose	-	3A2646-01	1	1	1	1	1				
27	Insulation Tube	L=77	7762-2943	1	1	1	1	1				
28	Vinyl Hose	L=358	7716-2025	1	1	1	1	1				
29	Distributor	-	432426-01	2	2	2	2	2				
30	Vinyl Hose	L=63	7716-2025	2	2	2	2	2				
31	Corner Insulation (A)	-	439376-01	1	1	1	1	1				
32	Bypass Hose	-	439237-03	1	1	1	1	1				

Title: **C. Water Circuit** Model: **KMD-700MAH, MWH, MRH**


Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0	N-1 to P-1	P-2 to Q-0	R-0 R-1	S-1 T-0			
33	Corner Insulation (B)	-	439392-01	1	1	1	1	1			
34	Hose Clamp	25 mm, SS	427443-03	9	9	9	9	9			
35	Ball Valve Assembly	S-0761	442137A01	1	1	1	1	1			
35a	Ball Valve	(442137A01)	439293-01	1	1	1	1	1			
35b	Male Adaptor	(442137A01)	325826-01	2	2	2	2	2			
35c	"O" Ring	(442137A01)	7611-P018	2	2	2	2	2			
36	Valve Holder	-	3A1178-01	1	1	1	1	1			
36a	FT Screw	4x8	7F31-0408	3	3	3	3	3			
37	Insulation Tube	L=210	7762-2636	1	1	1	1	1			
38	Microswitch	-	4A2546-01	1	1	1	1	1			
38a	Tapping Screw	3x14	431415-02	2	2	2	2	2			
39	Silicone Hose	L=80	773013896	1	-						
		L=200			1	1	1	1			
40	Handle	-	215383-01	1	1	1	1	1			
40a	T2 Screw	4x8	7P31-0408	1	1	1	1	1			
41	Hose Clamp	27 mm, SS	427443-08	2	2	2	2	2			
42	Hose – Float Switch	-	3A2647-01	1	1	1	1	1			
43	Drain Valve Bracket	SS	3A2686-01	1	1	1	1	1			
43a	Truss Head Screw	4x8, SS	7C32-0408	2	2	2	2	2			
44	Drain Valve	-	4A2396-01	1	1	1	1	1			
44a	Truss Head Screw	4x8, SS	7C32-0408	2	2	2	2	2			
45	Drain Hose – PM	-	4A3044-01	1	1	1	1	1			
46	Insulation Tube	L=75	7762-2636	1	1	1	1	1			
47	Hose Clamp	20 mm, SS	427443-06	9	9	9	9	9			
48	Drain Hose	-	4A3002-01	1	1	1	1	1			
49	Drain Hose – Overflow	-	4A3003-01	1	1	1	1	1			
50	Overflow Pipe	-	430722-06	1	-						
			430722-07		1	1	1	1			
51	"O" Ring	-	4A1234-01	1	1	1	1	1			
52	Overflow Cap	-	321002-01	1	1	1	1	1			
53	Connector – Float Switch	-	426799-03	1	1	1	1	1			
54	Float Switch Stop	-	4A0137-01	1	-						
55	Float Switch	-	4A0886-03	1	1	-					
			4A0886-01			1	1	-			
			4A3624-01					1			
55a	Truss Head Screw	4x8, SS	7C32-0408	2	2	2	2	2			

D. Control Box Assembly
KMD-700MAH, MWH, MRH
 N-0, N-1, P-0, P-1

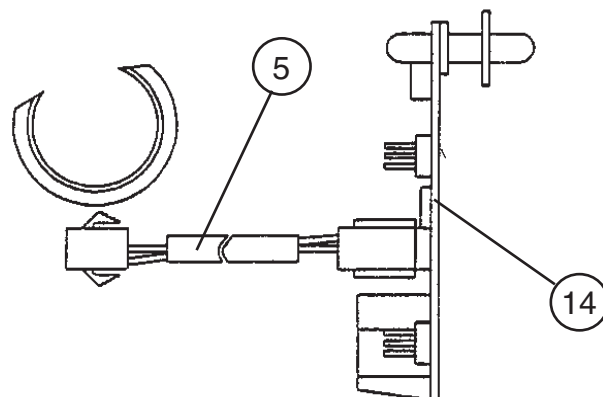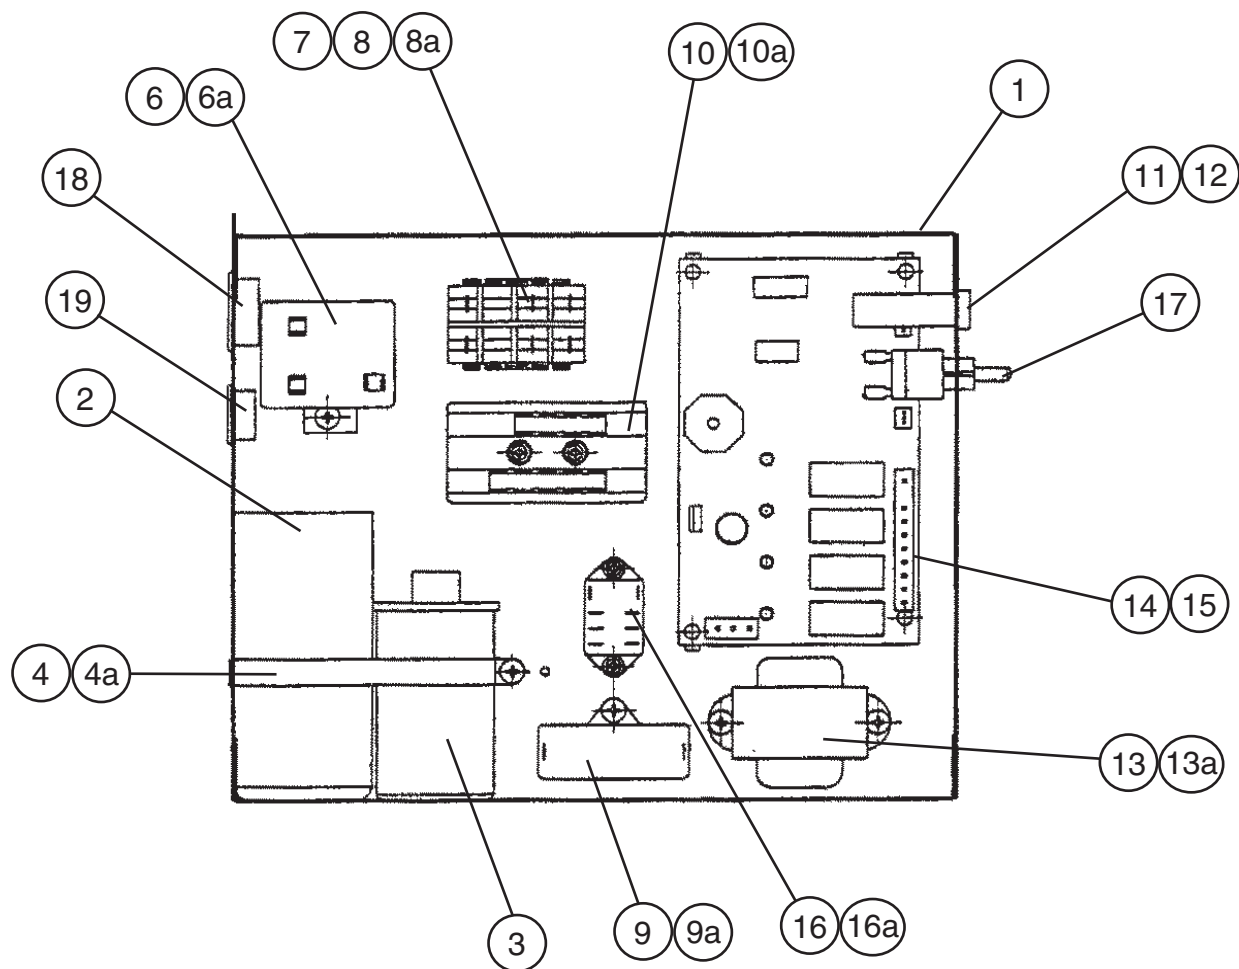


Detailed Resistor Wire Harness Connection

D. Control Box Assembly
KMD-700MAH, MWH, MRH
P-2, P-3, Q-0, R-0, R-1, S-1, T-0

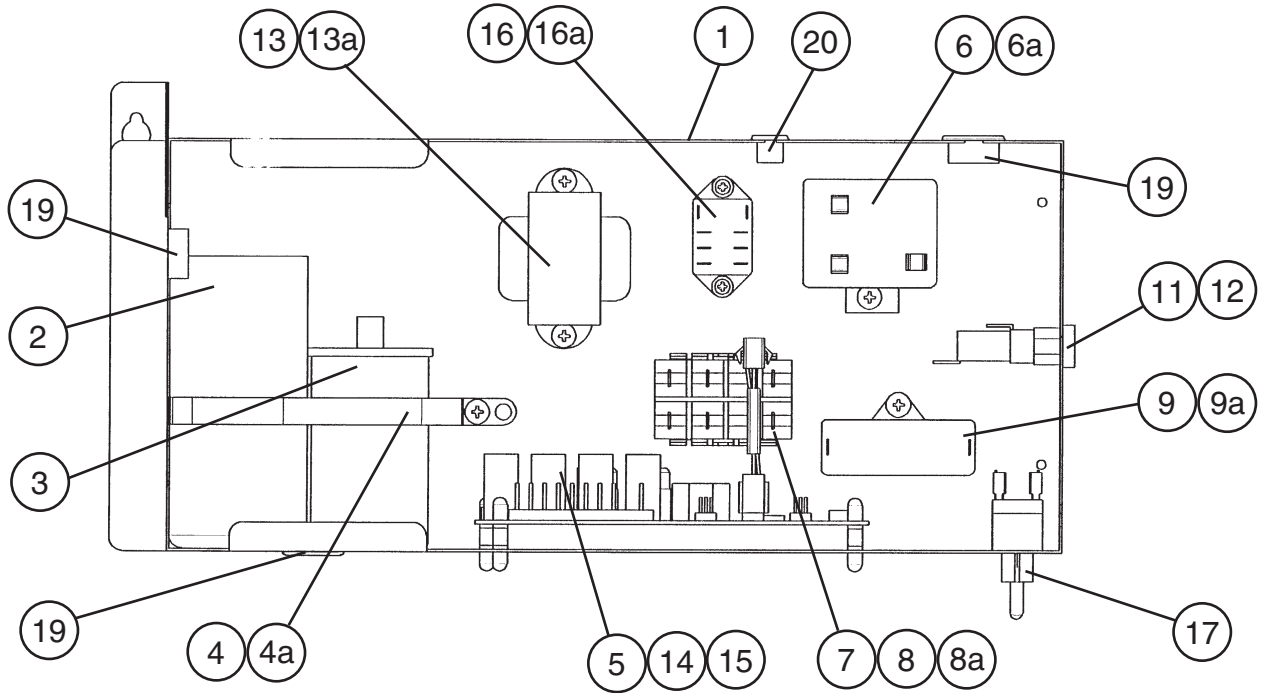

Title: D. Control Box Assembly Model: KMD-700MAH, MWH, MRH											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0 to P-1	P-2 to R-0	R-1 to T-0					
1	Control Box	GS	2A2799-01	1	-						
			3A3068G01		1	1					
2	Capacitor - Starting	145-174 MFD 220 VAC	3A0076-11	1	1	1					
3	Capacitor - Run	35 MFD 370 VAC	3A2005-03	1	1	1					
4	Strap	GS	4A2262-03	1	1	1					
4a	T2 Screw	4x8	7P31-0408	1	1	1					
5	Resistor Wire Harness	L=1220	4A2200G01	1	1	1					
6	Starter	-	4A1107-13	1	1	1					
6a	T2 Screw	4x8	7P31-0408	1	1	1					
7	Magnetic Contactor (includes Bracket item 8 as of P-2)	VC20	428393-01	1	1	1					
8	Bracket	-	428393F01	1							
8a	T2 Screw	4x8	7P31-0408	2	2	2					
9	Capacitor	10 MFD 250 VAC	443192-01	1	1	1					
9a	T2 Screw	4x10	7P31-0410	1	1	1					
10	Terminal Block	-	4A2619-01	1	-						
10a	Tapping Screw	3x8	431415-01	2	-						
11	Fuse Holder	HTB921	4A0892-01	1	1	-					
		HTB821	4A3449-01			1					
12	Fuse	AGC-10	4A0893-07	2	2	2					
13	Transformer	26D285H	3A0172-01	1	1	1					
13a	T2 Screw	4x8	7P31-0408	2	2	2					
14	Controller Board	HOSHIZAKI-001A	2A1410-01	1	1	1					
15	Board Support	OBLS37-M	4A0336-03	4	4	4					
16	Relay	LY2F 120 VAC	406132-07	1	1	1					
16a	Tapping Screw	3x8	431415-01	2	2	2					
17	Toggle Switch	8966K84	443119-01	1	1	1					
18	Bushing	SB-1093-15	420470-03	1	-						
19	Bushing	OCB-875	428394-04	1	3	3					
20	Bushing	OCB-500	428394-02		3	3					


E. Label Location
KMD-700MAH
N-0, N-1, P-0

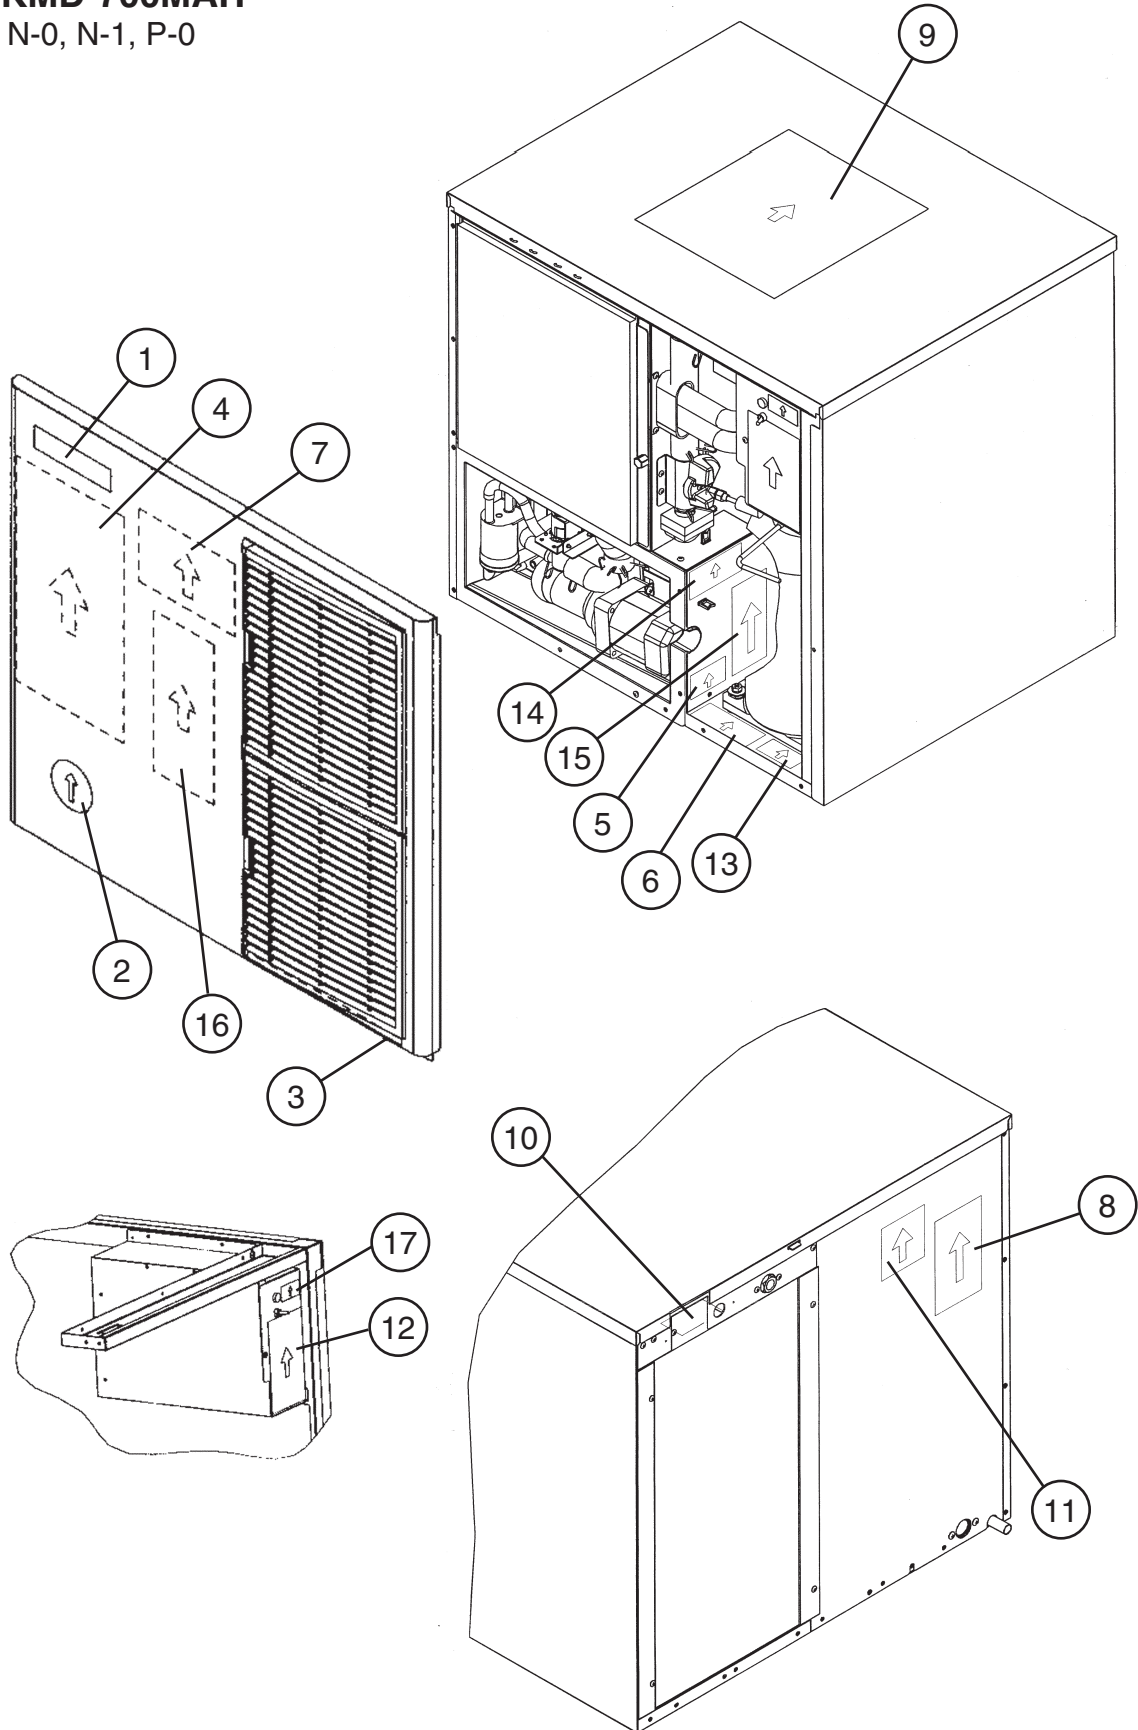

E. Label Location


KMD-700MAH

P-2, P-3, Q-0, R-0, R-1, S-1, T-0

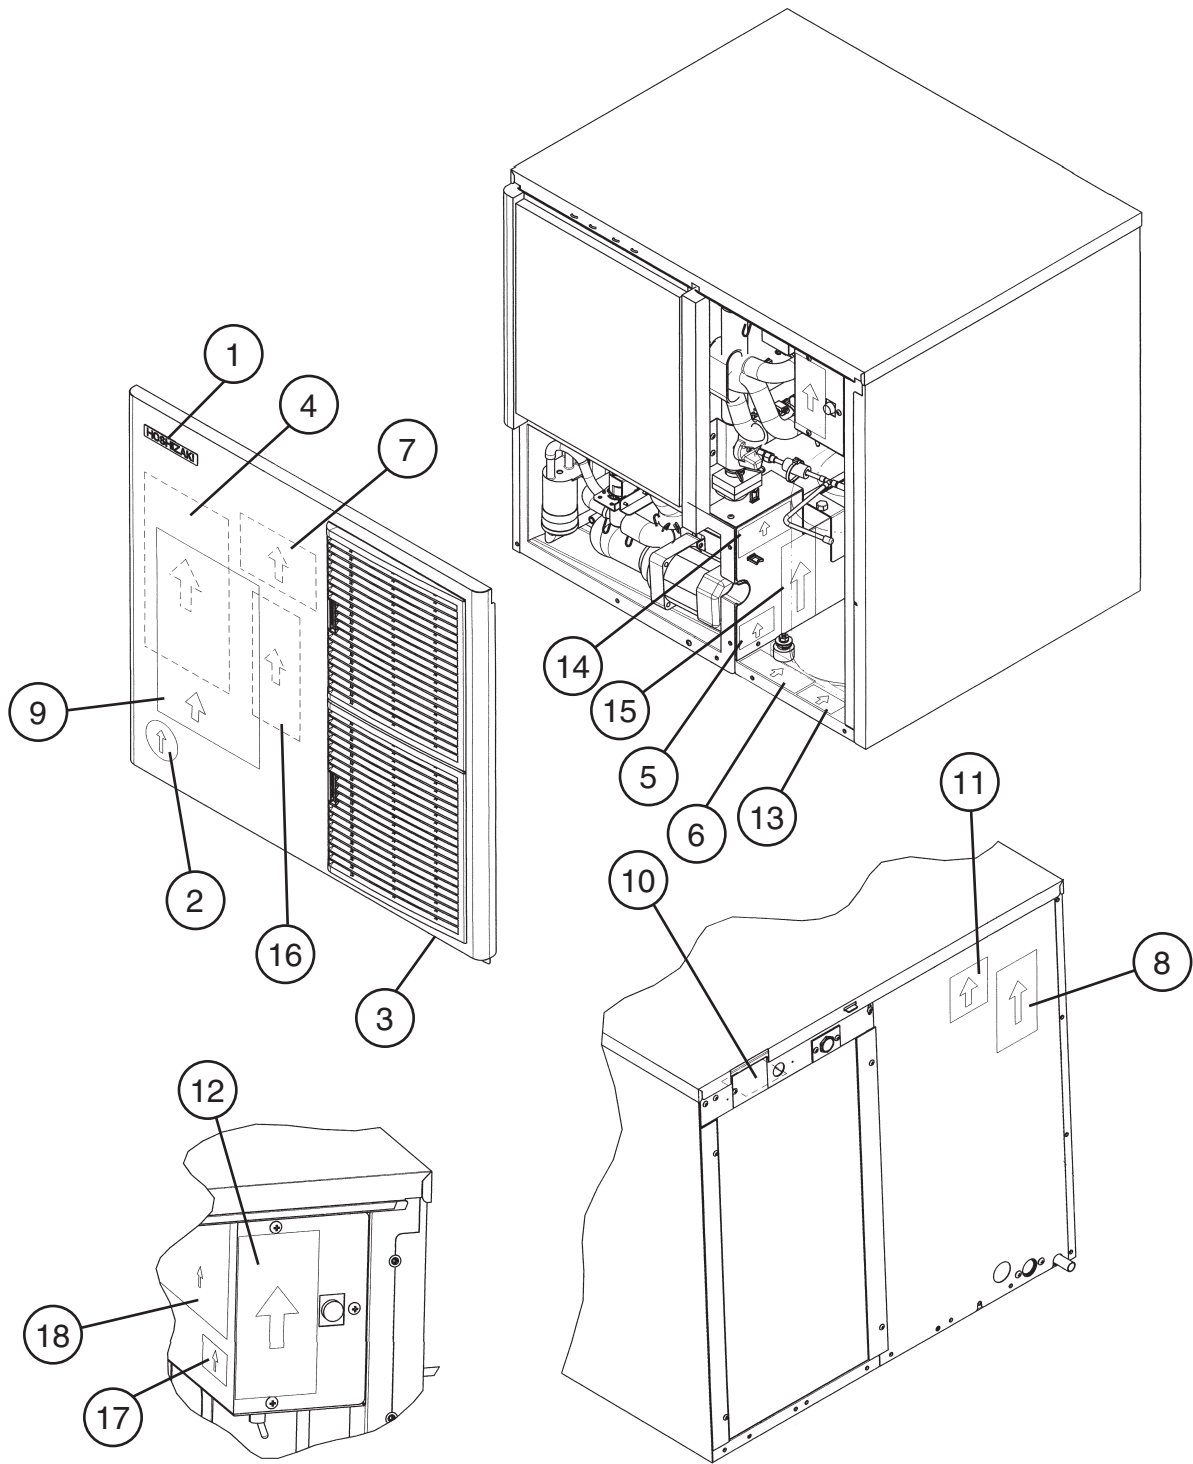

Title: E. Label Location Model: KMD-700MAH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0 to P-0	P-2 P-3	Q-0	R-0 to T-0					
1	Emblem	ABS	4A0560-01	1	1	1	1					
2	Label – Penguin (R)	PETP FILM	4A0526-01	1	1	1	1					
3	Label – Air Filter	PETP FILM	426177-01	1	1	1	1					
4	Maintenance Label	PVC FILM	2A2821-01	1	1	1	1					
5	Caution Label (F)	PVC FILM	439146-01	1	1	1	1					
6	Caution Label (K)	PVC FILM	439150-01	1	1	1	1					
7	Wiring Label	PVC FILM	3A2730-01	1	1	1	1					
8	Nameplate	-	2A2832-01	1	1	1	1					
9	Instruction Sheet	PAPER	2A2822-01	1	1	1	1					
10	Tag – Warning: Electrical Connection	PAPER	428430-01	1	1	1	1					
11	Instruction Label	PVC FILM	444575-01	1	1	1	1					
12	Manual Label	PVC FILM	3A2729-01	1	-							
			3A3072-01		1	1	1					
13	Label – R-404A	PES FILM	4A0960-01	1	1	1	1					
14	Operation Label – Valve	PVC FILM	439541-01	1	1	1	1					
15	Rating Label	-	2A2833-01	1	1	1	1					
16	Label – Control Board	PVC FILM	3A2220-01	1	1	1	1					
17	Label – Fuse	-	4A2817-01	1	1	1	1					
18	Label – Alarm	-	4A3517-01			1	1					


E. LABEL LOCATION
KMD-700MWH
N-0, N-1

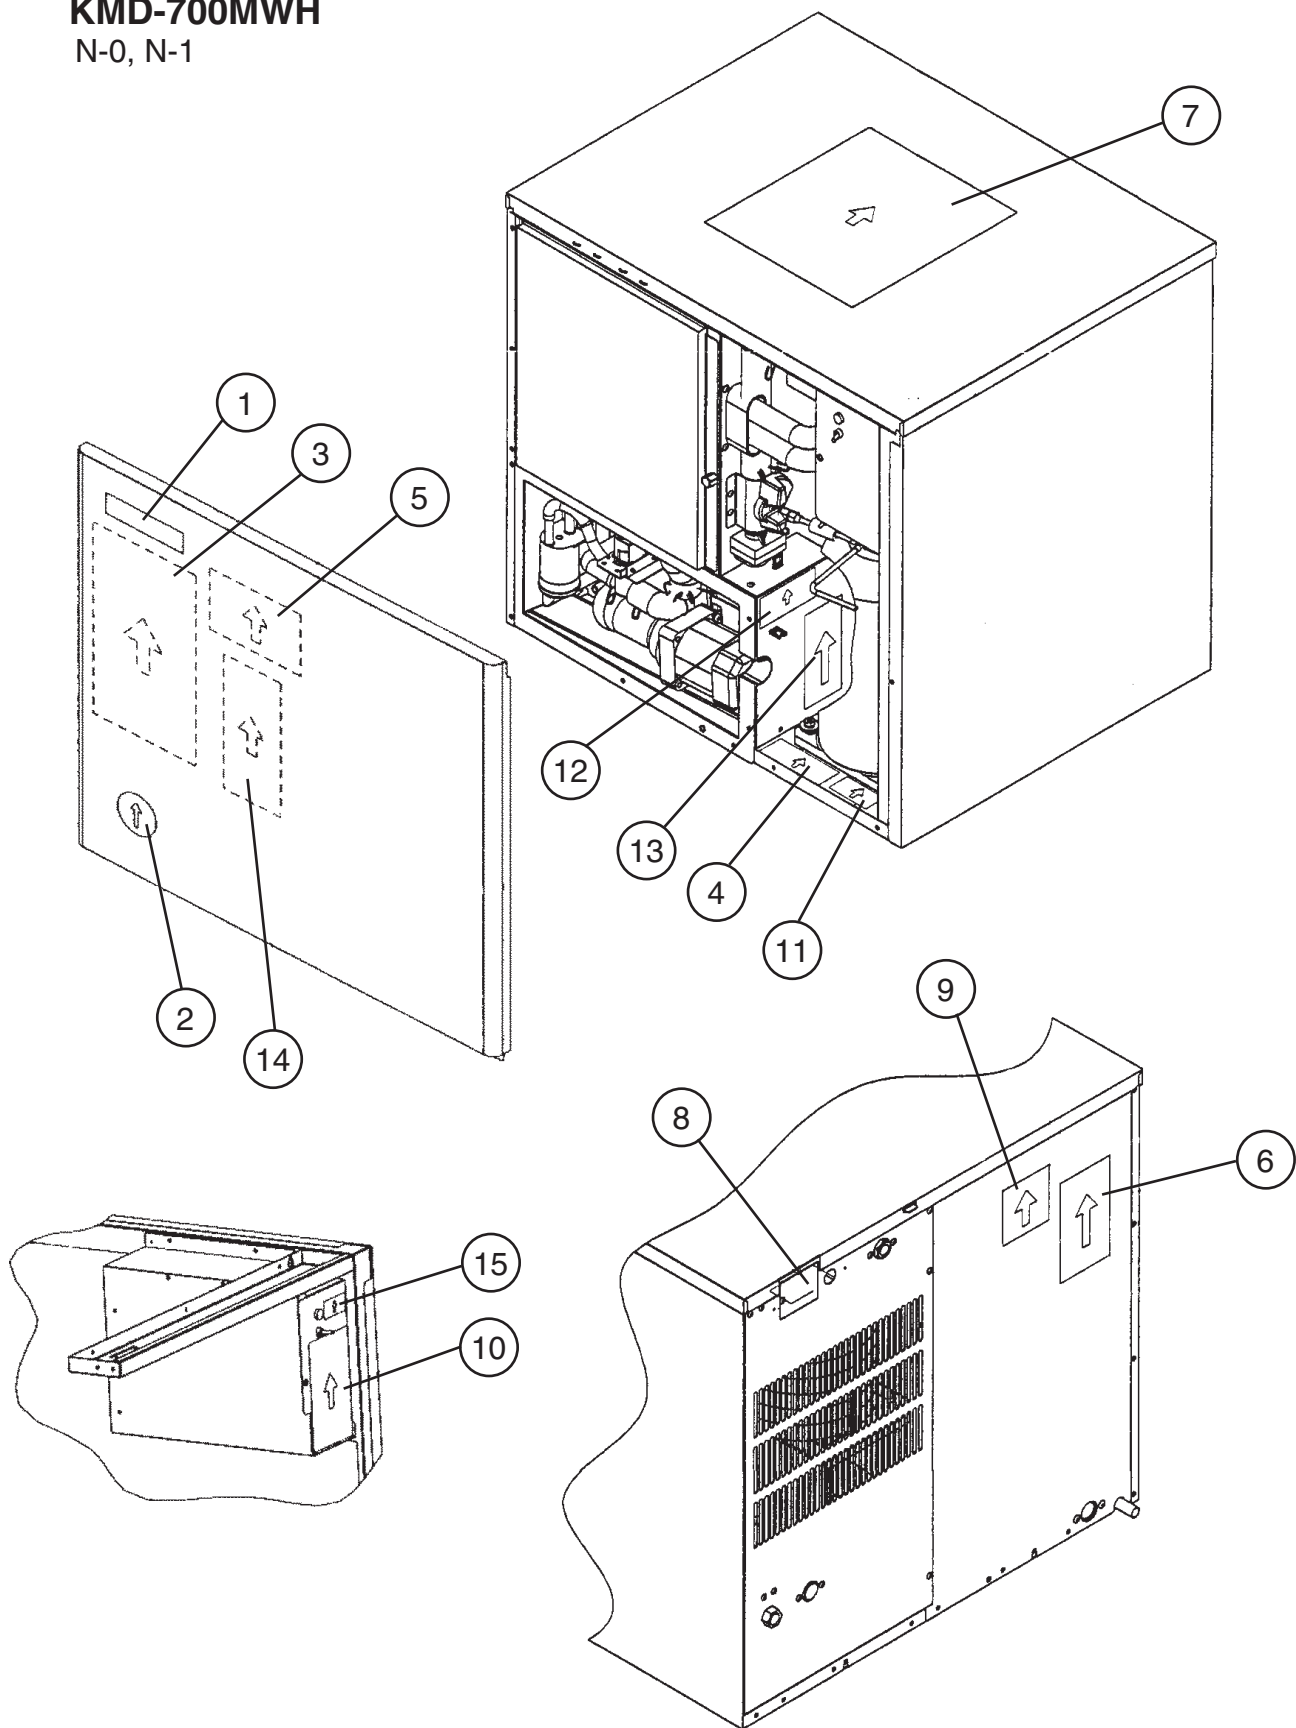

E. Label Location


KMD-700MWH

P-2, Q-0, R-0, R-1, S-1, T-0

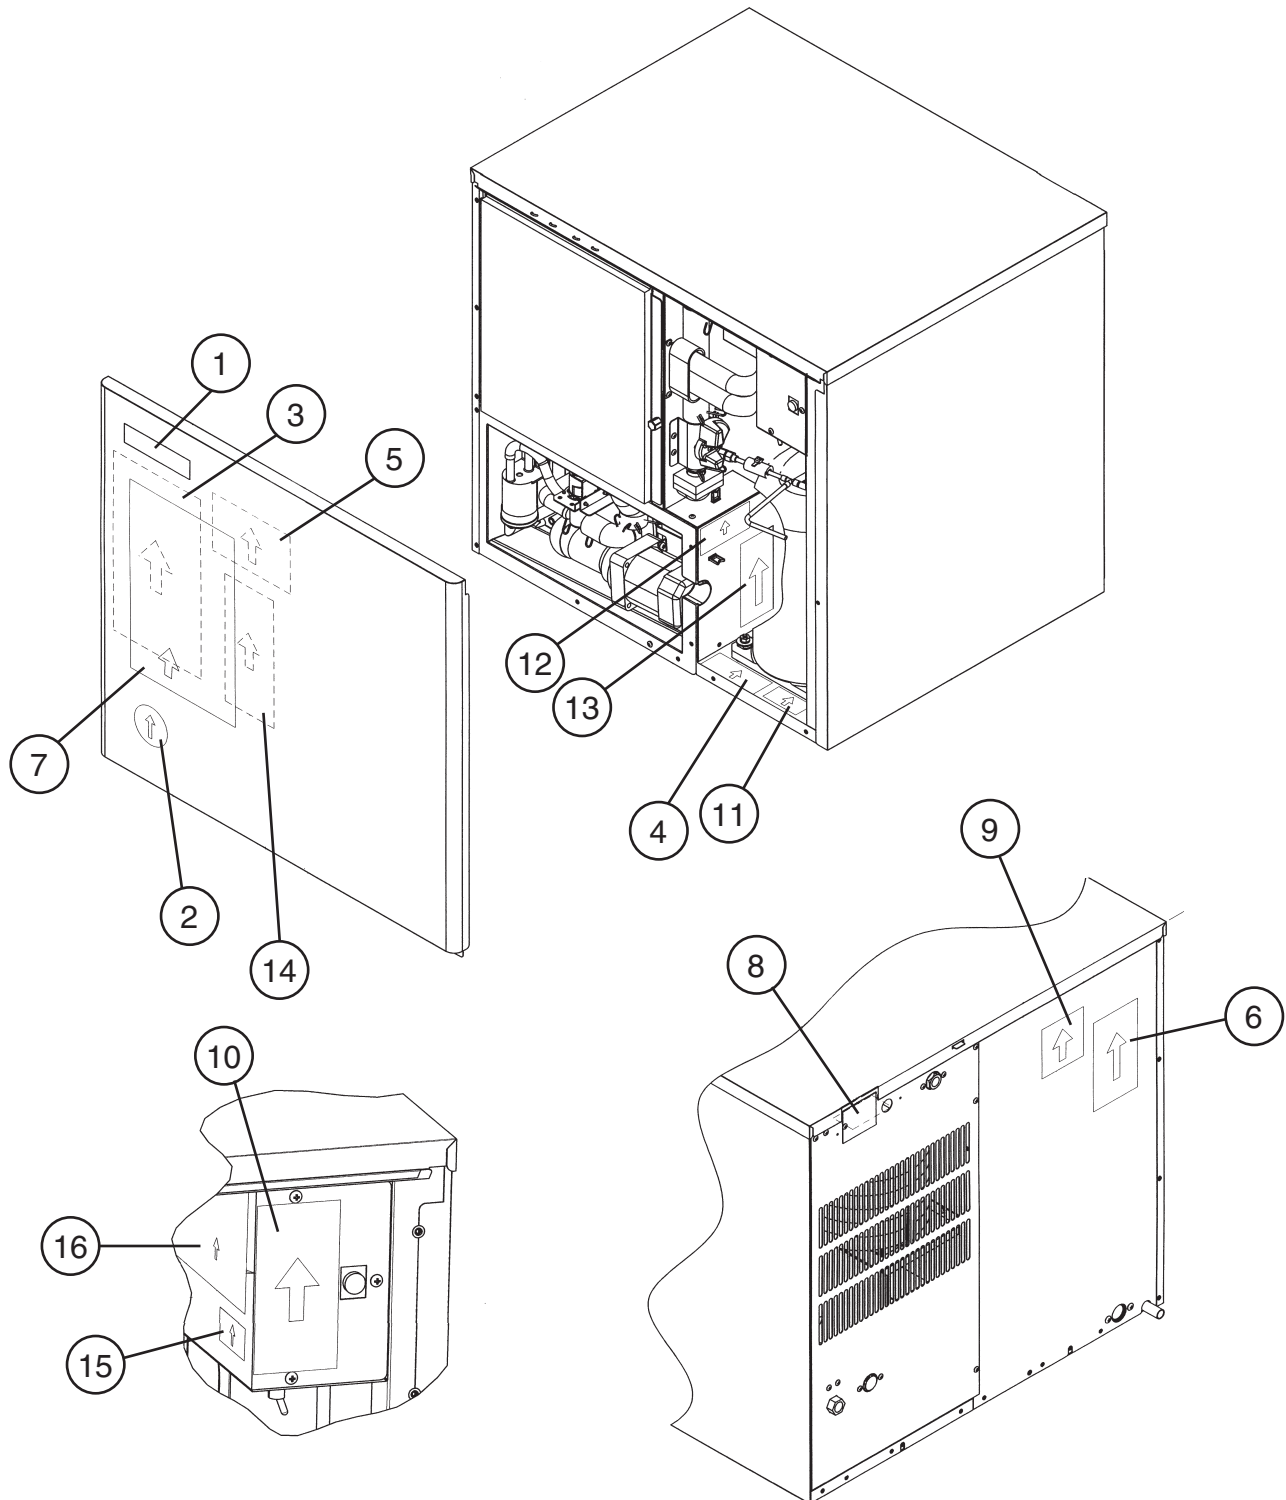

Title: E. Label Location Model: KMD-700MWH												
Index No.	Description	Material or Model Number	Part Number	Required Number								
				N-0 N-1	P-2	Q-0	R-0 to T-0					
1	Emblem	ABS	4A0560-01	1	1	1	1					
2	Label – Penguin (R)	PETP FILM	4A0526-01	1	1	1	1					
3	Maintenance Label	PVC FILM	2A2821-01	1	1	1	1					
4	Caution Label (K)	PVC FILM	439150-01	1	1	1	1					
5	Wiring Label	PVC FILM	3A2730-01	1	1	1	1					
6	Nameplate	-	2A2832-02	1	1	1	1					
7	Instruction Sheet	PAPER	2A2822-01	1	1	1	1					
8	Tag – Warning: Electrical Connection	PAPER	428430-01	1	1	1	1					
9	Instruction Label	PVC FILM	444575-01	1	1	1	1					
10	Manual Label	PVC FILM	3A2729-01	1	-							
			3A3072-01		1	1	1					
11	Label – R-404A	PES FILM	4A0960-01	1	1	1	1					
12	Operation Label – Valve	PVC FILM	439541-01	1	1	1	1					
13	Rating Label	-	2A2833-02	1	1	1	1					
14	Label – Control Board	PVC FILM	3A2220-01	1	1	1	1					
15	Label – Fuse	-	4A2817-01	1	1	1	1					
16	Label – Alarm	-	4A3517-01			1	1					


E. Label Location
KMD-700MRH
N-0, N-1, P-1

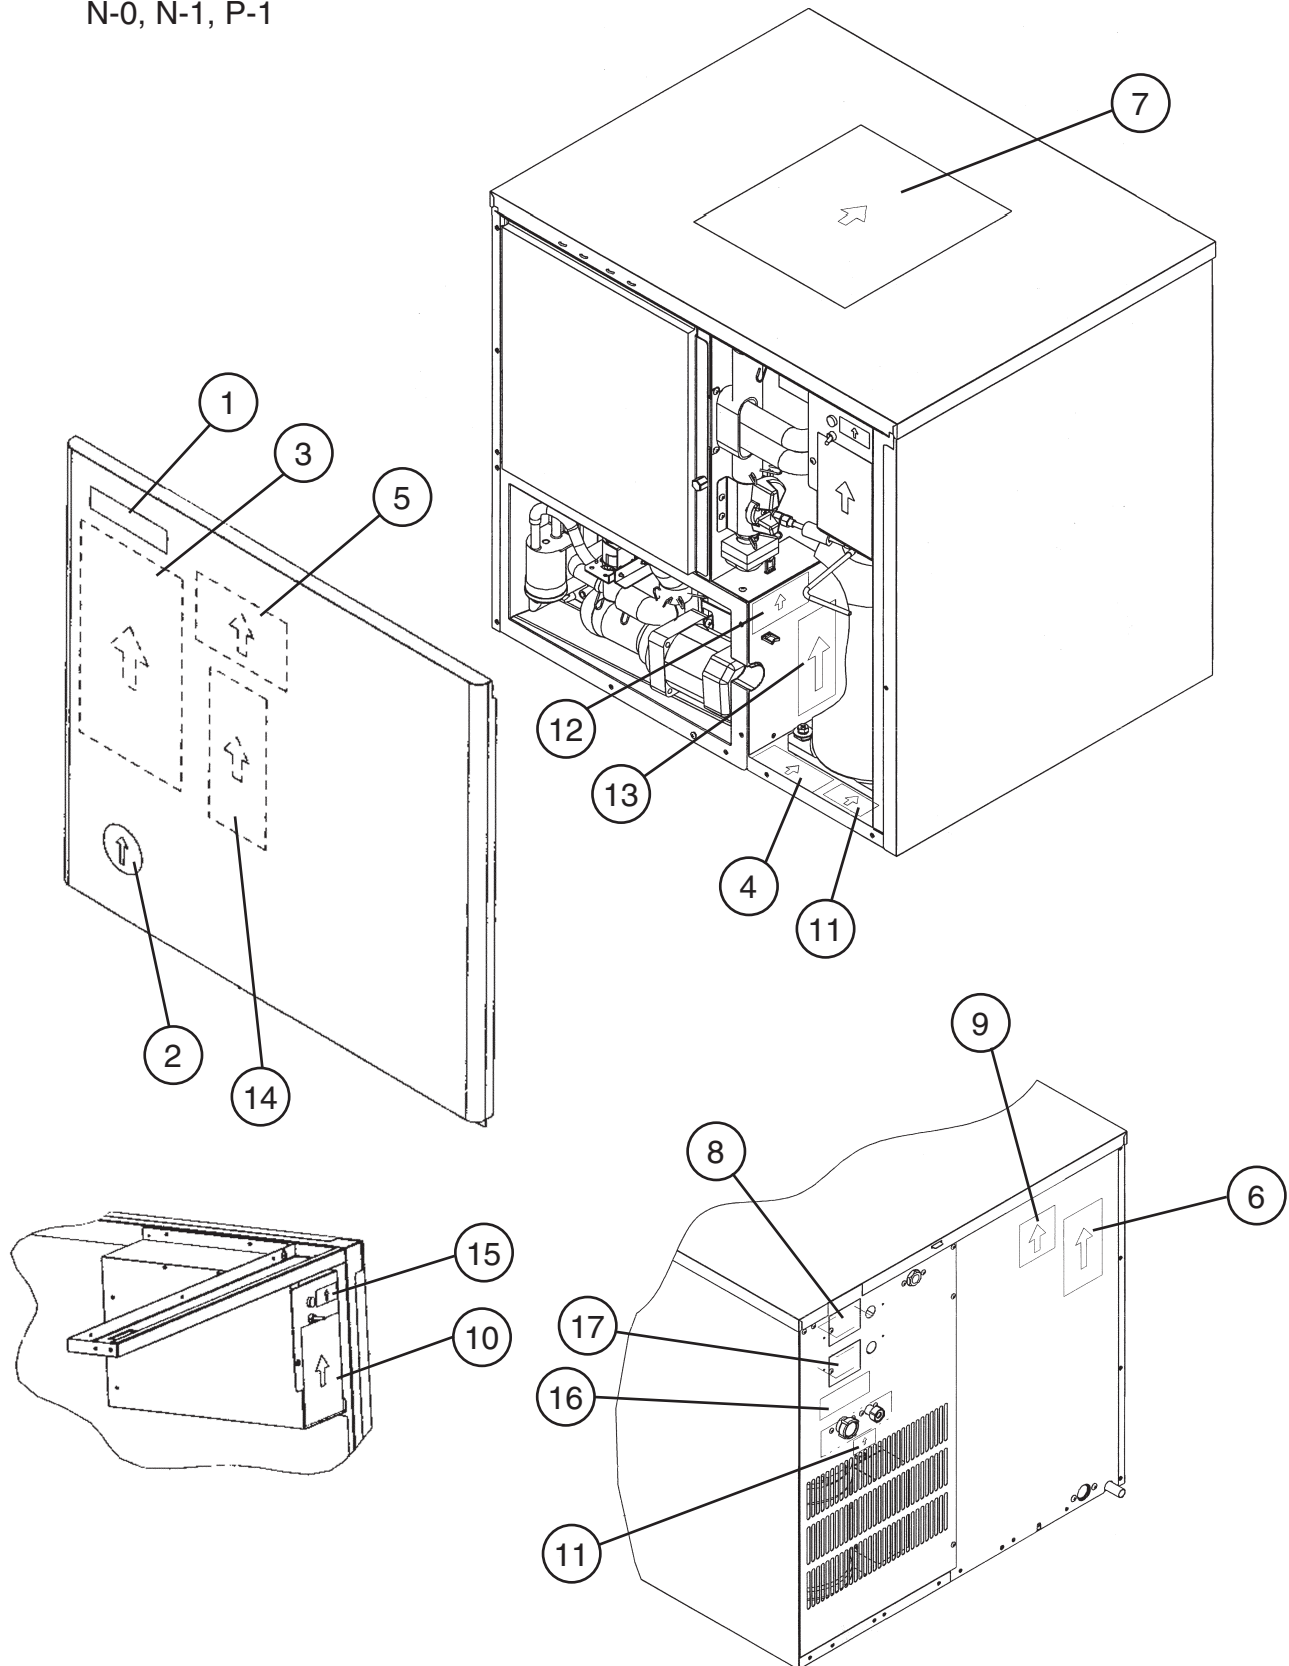

E. Label Location

KMD-700MRH

P-2, Q-0, R-0, R-1, S-1, T-0

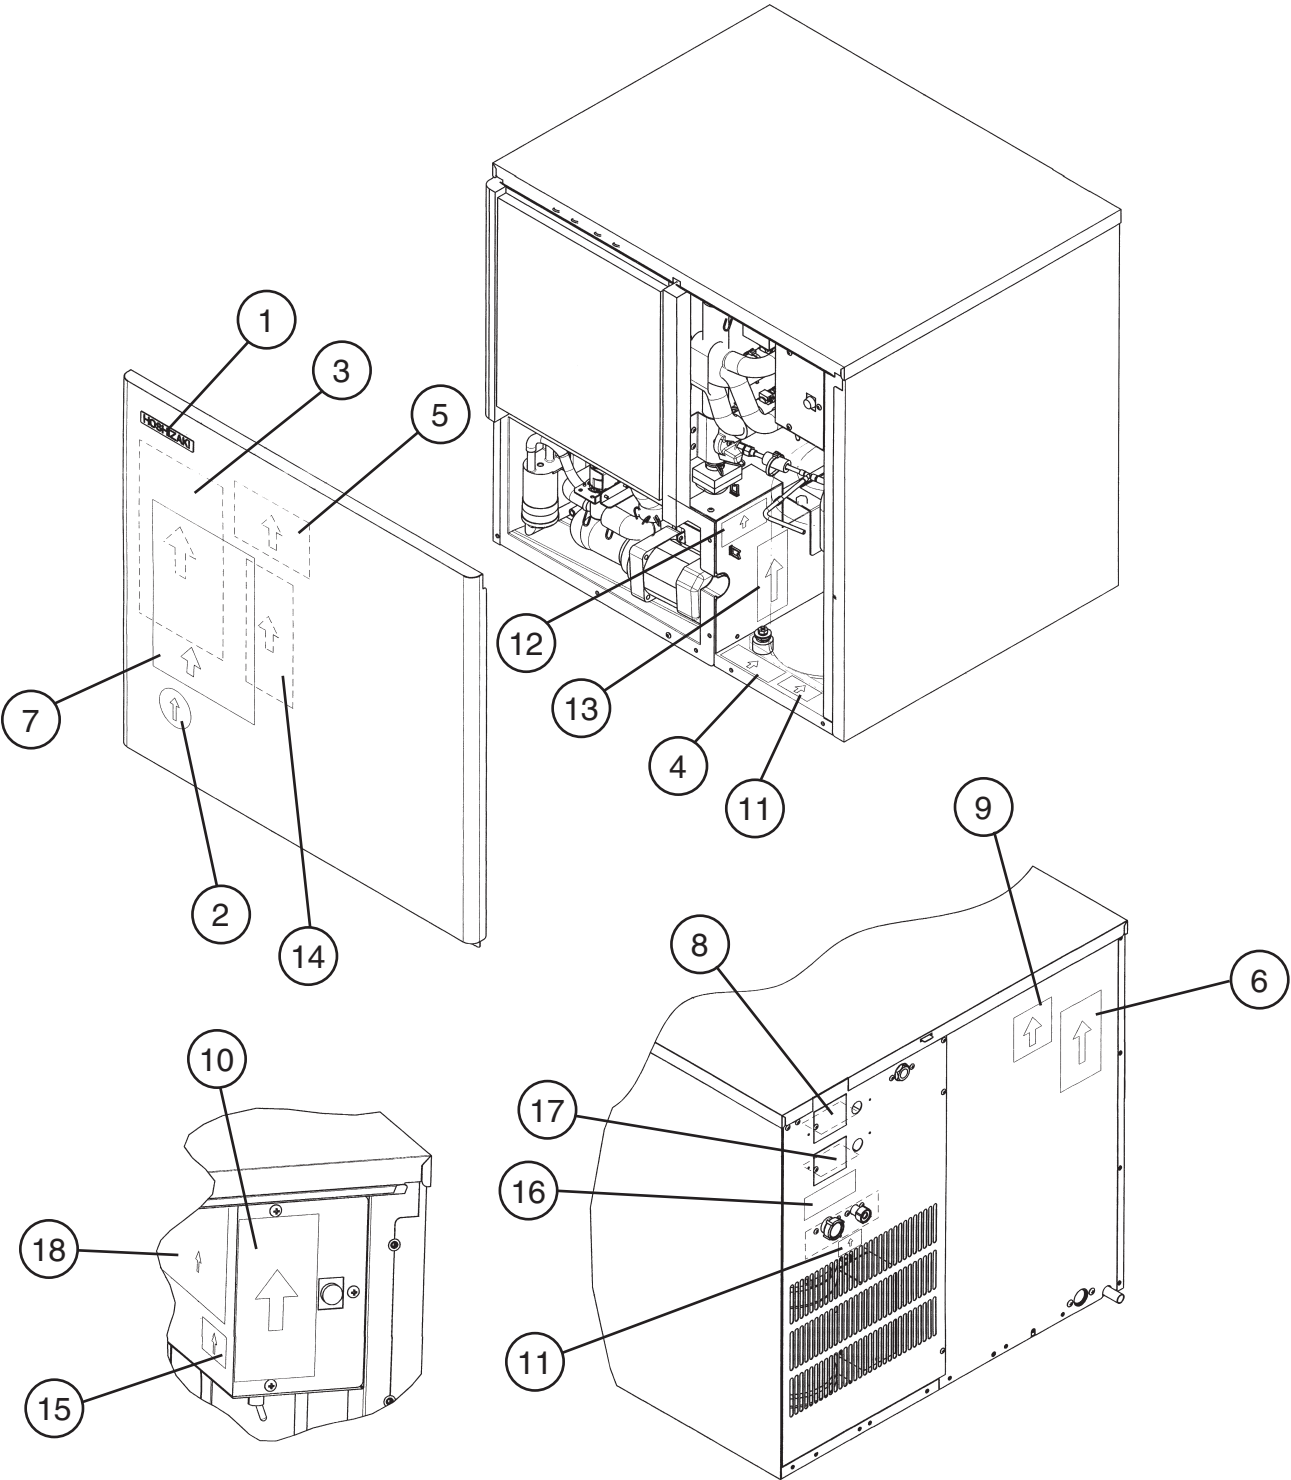


Title: **E. Label Location** Model: **KMD-700MRH**

Index No.	Description	Material or Model Number	Part Number	Required Number									
				N-0 to P-1	P-2	Q-0	R-0 to T-0						
1	Emblem	ABS	4A0560-01	1	1	1	1						
2	Label - Penguin (R)	PETP FILM	4A0526-01	1	1	1	1						
3	Maintenance Label	PVC FILM	2A2821-01	1	1	1	1						
4	Caution Label (K)	PVC FILM	439150-01	1	1	1	1						
5	Wiring Label	PVC FILM	3A2767-01	1	1	1	1						
6	Nameplate	-	2A2832-03	1	1	1	1						
7	Instruction Sheet	PAPER	2A2822-01	1	1	1	1						
8	Tag - Warning: Electrical Connection	PAPER	428430-01	1	1	1	1						
9	Instruction Label	PVC FILM	444575-01	1	1	1	1						
10	Manual Label	PVC FILM	3A2729-01	1	-								
			3A3072-01		1	1	1						
11	Label – R-404A	PES FILM	4A0960-01	1	1	2	2						
12	Operation Label - Valve	PVC FILM	439541-01	1	1	1	1						
13	Rating Label	-	2A2833-03	1	1	1	1						
14	Label – Control Board	PVC FILM	3A2220-01	1	1	1	1						
15	Label – Fuse	-	4A2817-01	1	1	1	1						
16	Caution – Remote Label	-	4A1491-01	1	1	1	1						
17	Tag - Fan Motor Leads	-	4A1494-01	1	1	1	1						
18	Label – Alarm	-	4A3517-01			1	1						

F. Pump Motor Assembly

KMD-700MAH, MWH, MRH

N-0, N-1, P-0, P-1, P-2, P-3, Q-0, R-0, R-1, S-1, T-0

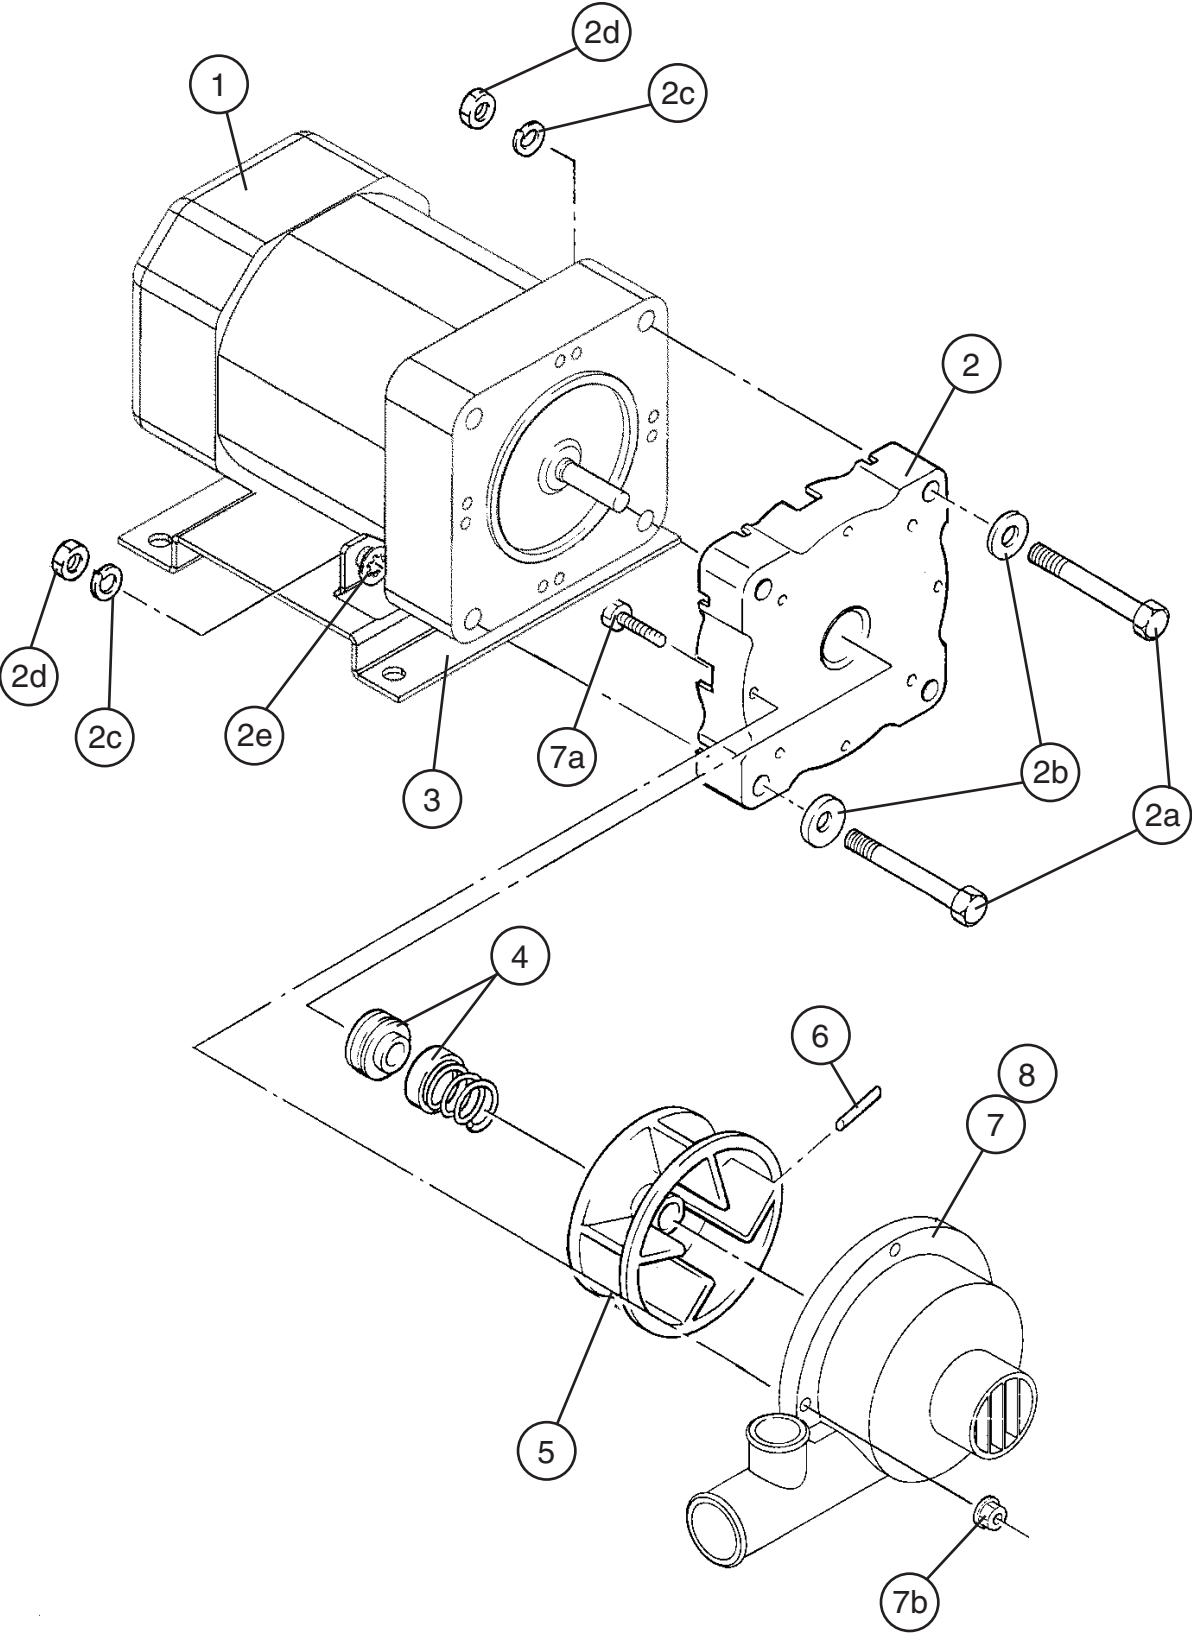


Title: F. Pump Motor Assembly Model: KMD-700MAH, MWH, MRH											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0 to P-3	Q-0	R-0 to T-0					
1	Pump Motor	-	2U0106-01	1	1	1					
2	Pump Flange	-	215662-01	1	1	1					
2a	Hexagon Bolt	6x40, SS	7B02-0640	4	4	4					
2b	Flat Washer	6, SS	7W22-0600	4	4	4					
2c	Split Lock Washer	6, SS	7L22-0600	4	4	4					
2d	Nut	6, SS	7N12-0600	4	4	4					
2e	Tooth Washer	6, SS	7R22-0600	2	2	2					
3	Pump Motor Bracket	SS	323904-01	1	1	1					
4	Mechanical Seal	H5-PN, 8 MM	428545-01	1	-						
	Mechanical Seal (R)	-	4A3820-01		1	1					
5	Impeller	ABS	428548-01	1	1	1					
6	Pin	SS	4A0648-01	1	1	1					
7	Pump Housing	-	2A2762-01	1	1	1					
7a	Hexagon Bolt	4x30, SS	7B02-0430	4	4	4					
7b	Flange Nut	4, SS	7J02-0400	4	4	4					
8	Packing	-	428547-01	1	1	1					

G. Accessories and Packaging

KMD-700MAH, MWH, MRH

N-0, N-1, P-0, P-1, P-2, P-3, Q-0, R-0, R-1, S-1, T-0

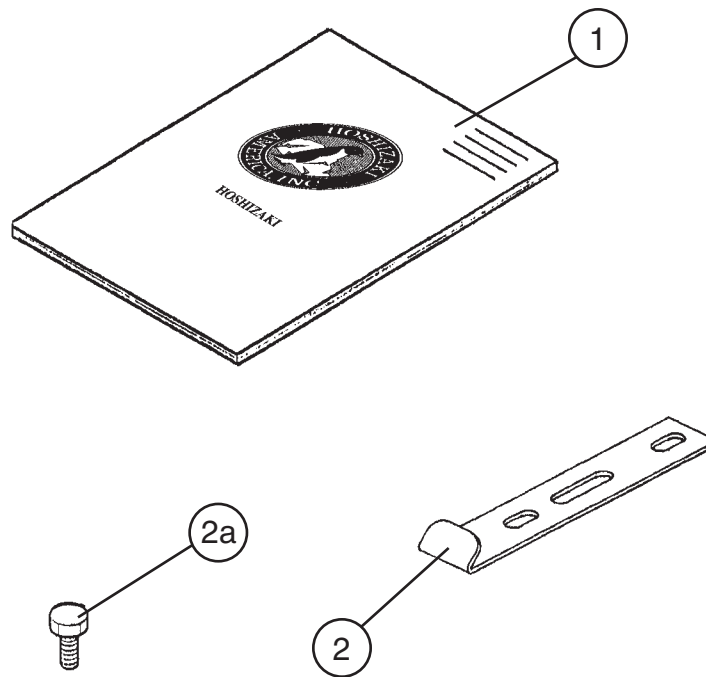

Title: G. Accessories and Packaging Model: KMD-700MAH, MWH, MRH											
Index No.	Description	Material or Model Number	Part Number	Required Number							
				N-0 N-1	P-0 to Q-0	R-0 to T-0					
1	Instruction Manual	PAPER	91A1QA10D	1	1	1					
2	Universal Brace	GS	4A0363-01	2	2	2					
2a	Hex Head Bolt	5x12, SS	7B02-0512	2	2	2					
Packaging (on models currently in production)			2A2126A05								
1	Pallet	-	2A0853-12	1	1	1					
2	Tray	-	2A2173-06	1	1	1					
3	Wood Block – B	-	4A0004-02	3	3	3					
4	Side Protector	-	4A2304-01	3	3	3					
5	Corner Post	-	3A0788-15	2	2	2					
6	Wood Block – C	-	4A0004-03	2	2	2					
7	Corner Post	-	3A0788-06	4	-						
			3A0788-17		4	4					
8	Side Protector	-	4A2304-02	2	2	2					
9	Carton	-	2A2125-08	1	1	1					